


CSG-FBHP Clean steam generation system for Food and Beverage Installation and Maintenance Instructions

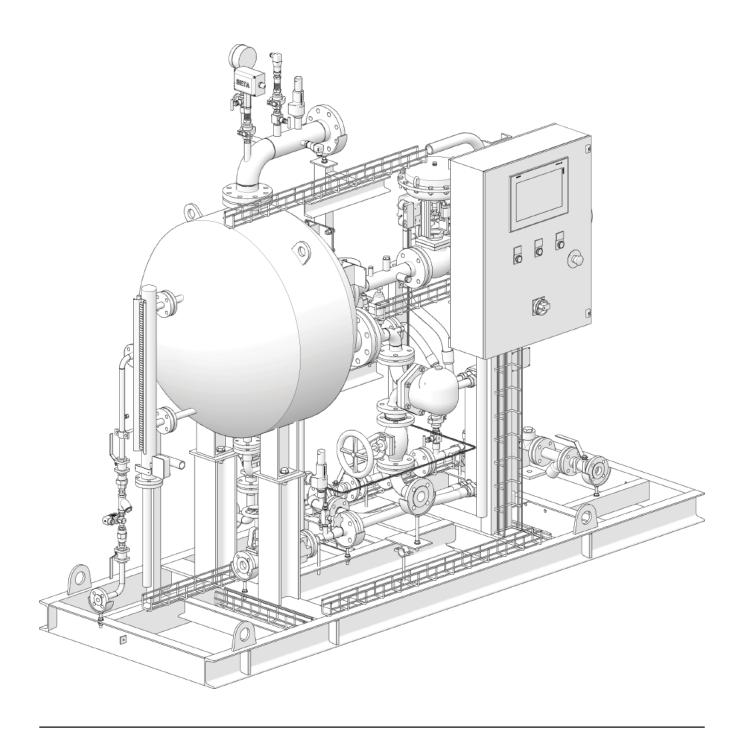

Contents

1.	Safety information				
2.	Ge	neral product information			
	2.1	Description	8		
	2.2	Identification of the product	9		
	2.3	Product nomenclature and selection guide	11		
	2.4	Design conditions	13		
	2.5	Operating limits	14		
	2.6	Dimensions and weights	16		
3.	Ins	stallation			
	3.1	Installation site			
	3.2	Handling	17		
	3.3	Positioning and fastening			
	3.4	Process pipework and vents			
	3.5	Connections	18		
	3.6	Connection of the power supply	23		
	3.7	Connection of air supply (where necessary)			
	3.8	Electrical specifications	24		
	3.9	Digital inputs/outputs (on all versions)			
4.	Со	mmissioning	25		
	4.1	Cleaning before first use	25		
	4.2	On-site commissioning procedure	26		
	4.3	Start-up procedure			
	4.4	Shut-down procedure	28		
	4.5	Setting the VU33 control valve			
	4.6	Changing the operating pressure	29		
	4.7	Ambient conditions			

Sys	stem controls	20
5.1	Runtime controls	30
5.2	Manual controls	•
5.3	PID Tuning	
5.4	Optional functions	35
5.5	Emergency stop	36
Dia	gnostics	
6.1	Control bands	
6.2	Control capacity	37
6.3	Water level failure	
6.4	High water limit	
6.5	Panel temperature limit	
6.6	High pressure limit	
6.7	Low water level limit	
6.8	Water pump fault	 38
6.9	Water supply failure	
6.10	Pneumatic supply failure	
6.11	Supply steam failure	
6.12	TDS limit	
6.13	TDS hysteresis fault	 39
6.14	Trap alarms	
6.15	Valve feedback	
6.16	Isolation valve feedback	
6.17	Analogue input diagnostic	40
6.18	Optional E-stop triggers	
6.19	Umbrella alarms	
6.20	Steam control valve failure	_
6.21	Water level control valve failure	41
6.22	Preheater Thermal Cycling	
6.23	Preheater temperature monitoring	_

7.	Troubleshooting			
8.	Ма	intenance		
	8.1	General information	74	
	8.2	Inspection/Replacement of the pressure safety switch		
	8.3	Replacement of the Pressure Safety Valve (Generator)		
	8.4	Preheater replacement	75	
	8.5	Spare parts		
	8.6	Recommend inspection	76	
	8.7	Spirax Sarco Service maintenance	77	
9.	Co	mponent map	78	
	9.1	System PandID	70	
	9.2	Component Configuration		
	9.3	Component naming convention	80	

10.	HM	I map	82
	10.1	Commissioning screens	84
	10.2	Home screen	88
	10.3	Main menu	90
	10.4	Alarms	94
	10.5	Display settings	96
	10.6	Process settings	97
	10.7	Performance data	100
	10.8	Data trends	101
	10.9	System	102
11.	Apı	pendix	110
	11.1	Torquing procedure:	110

3

Copyright © Spirax-Sarco Limited 2022

All rights reserved

Spirax-Sarco Limited grants the legal user of this product (or device) the right to use the Work(s) solely within the scope of the legitimate operation of the product (or device). No other right is granted under this licence. In particular and without prejudice to the generality of the foregoing, the Work(s) may not be used, sold, licensed, transferred, copied or reproduced in whole or in part or in any manner or form other than as expressly granted here without the prior written consent of Spirax-Sarco Limited.

1. Safety information

In addition to putting your personnel at risk of death or serious harm, failure to comply with the instructions, recommendations and guidance set out in this document may jeopardise your warranty rights. Further, use of the product(s) otherwise than in accordance with this document will be undertaken entirely at your own risk. To the fullest extent legally permitted, Spirax Sarco excludes all responsibility and liability for any and all loss or damage caused in the event that the practices and procedures detailed in this document have not been followed.

Safe operation of these products can be guaranteed only if they are properly installed, commissioned and maintained by a qualified person (see Section 1.12) in compliance with the related operating instructions. General installation and safety instructions for pipeline and plant construction and also the proper use of tools and safety equipment must also be complied with.

General safety notes

This manual is intended to cover the installation, start-up and maintenance procedures of the CSG-FBHP indirect clean steam generator and must be read in conjunction with the installation and maintenance manuals (IM) of the single components of the unit and related additional safety notes.

Precautions when lifting the unit

The CSG-FBHP indirect clean steam generator must be lifted from the base using the lifting eye bolts installed on the base frame.



Do not lift the CSG-FBHP indirect clean steam generator by any other part except from the base.

Note: always leave sufficient space around the system for future maintenance operations.

Caution or Warning

Warnings

- 1. The unit is designed and constructed to withstand the intensity of work in ordinary use.
- 2. Use of the product for any other purpose, or failure to install the product in compliance with these Installation and Maintenance Instructions, may damage the product and also cause serious injuries to operating personnel.
- 3. Before carrying out any installation and maintenance procedure, always check that all primary steam, condensate and water return lines on the secondary have been isolated.
- 4. Make sure that residual pressure in the system and in pipework has been vented to atmospheric level.
- 5. To avoid the risk of burns, allow parts to cool before carrying out any type of operation.
- 6. Always wear suitable protective clothing before carrying out any installation or maintenance activity.
- 7. This product is intended to be connected into a system that can operate an EC1935 compliant process. To minimise the risk of non-intentionally added substances in the system, it is essential that an appropriate CIP (cleaning in place) cycle is carried out by the end user prior to first use in a food contact application. A list of the materials that could come directly or indirectly into contact with foodstuffs can be found in the Declaration of Compliance available for this product.

IM-P664-03 TFS Issue 5

1.1 Intended use

Referring to the installation and maintenance instructions and the nameplate of the unit and the Technical Specifications, check that the product is suitable for intended use/application.

EMEA - The CSG-FBHP indirect clean steam generator complies with the requirements of the European Pressure Equipment Directive 2014/68/EU and is marked.

America's - The CSG-FBHP indirect clean steam generator complies with the requirements of the ASME Pressure vessel code and ASME U Stamp upon request.

Asia Pacific - The CSG-FBHP indirect clean steam generator complies with the requirements of the Pressure Equipment Directive (PED or GB) Conformance to KGS / MOM and DOSH is available upon request.

- i) The product has been specifically designed for use on steam and water belonging to Group 2 of the above-mentioned Pressure Equipment Directive.
- ii) Check suitability of material, pressure and temperature and related maximum and minimum values. If the maximum operating limits of the product are lower than those of the system in which it to be inserted, or if malfunction of the product could generate dangerous overpressure or overtemperature, always insert a safety device in the system to prevent exceeding of such limits.
- iii) Determine the correct installation position and direction of flow of fluids.
- iv) The product is not designed to withstand external stresses induced by the system in which it is fitted. The installer is responsible for taking into account such stresses and for adopting adequate precautions to reduce these to a minimum.
- v) Prior to installation, remove protective covers from all connections and and also protective film and packaging elements.

1.2 Pressure Equipment Directive classification

The clean steam generators CSG-FBHP series are classified as assembly according to the European Pressure Equipment Directive (2014/68/EU):

Product	Fluid Group	Category
CSG-FBHP-130	2	Ш
CSG-FBHP-185	2	III
CSG-FBHP-235	2	IV
CSG-FBHP-300	2	IV
CSG-FBHP-375	2	IV
CSG-FBHP-470	2	IV
CSG-FBHP-600	2	IV

For the category of bespoke units, refer to the "EC Declaration of Conformity" supplied with the product. Other component parts of the assembly comply with the relevant European Directives, where necessary. Please refer to specific component literature for further details.

1.3 Access

Ensure safe access and, if necessary, a safe working platform (suitably guarded) before attempting any work on the product. Arrange suitable lifting gear if required.

1.4 Lighting

Ensure adequate lighting, particularly where detailed or intricate work is required.

1.5 Hazardous liquids or gases in the pipeline

Take into account what is currently in the pipeline or what may have been in the pipeline at some previous time. Consider: flammable materials, substances hazardous to health, extreme temperatures.

1.6 Hazardous environment around the product

Consider: areas with a risk of explosion, lack of oxygen (e.g. tanks, pits), dangerous gases, extreme temperatures, hot surfaces, fire hazards (e.g. during welding), excessive noise, moving machinery.

The place of installation of the assembly must be equipped with the fire-prevention devices required by current regulations.

1.7 The system

Consider the effect of the work to be carried out on the entire system. Consider whether the action proposed (e.g. closing of isolating valves, electrical isolation) may put any other part of the system or personnel at risk.

Hazards may include isolation of vents or protective devices or the rendering ineffective of controls or alarms. Ensure isolating valves are opened and closed gradually to avoid shocks to the system.



1.8 Pressure systems

Ensure that any pressure is isolated and safely vented to atmospheric pressure.

Consider double isolation (double block and bleed) and locking or labelling of closed valves. Do not assume that the system has depressurised even when the pressure gauge indicates zero.

1.9 Temperature

Allow time for temperature to normalise after isolation to avoid the risk of burns and consider whether protective clothing (including safety glasses) is required.

1.10 Tools and consumables

Before starting work, make sure you have suitable tools and/or consumables on hand. Use only genuine Spirax Sarco replacement parts.

1.11 Protective clothing

Consider whether you and/or others require protective clothing to protect against hazards, such as chemicals, high/low temperatures, radiation, noise, falling objects and danger to eyes and face.

1.12 Permits to work

All work must be carried out or supervised by a suitably competent person. Installation and operating personnel should be trained in correct use of the product according to the Installation and Maintenance Instructions. Any formal work permit system adopted must be complied with. Where no such system is applied, a person responsible should be informed of progress of the work and, where necessary, an assistant with primary responsibility for safety should be appointed. Post "warning signs" if necessary.

1.13 Handling

6

Manual handling of large and /or heavy products may involve a risk of injury. Lifting, pushing, pulling, carrying or supporting a load by bodily force may cause injury, particularly to the back. You are advised to assess the risks, taking into account the task, the individual, the load and the working environment and use appropriate handling methods according to the circumstances of the work to be carried out.

Note: if it is necessary to use slings for lifting, it is good practice to fit these around the plate of the base unit to avoid damage to the unit.

CSG-FBHP Clean steam generation system for Food & Beverage

1.14 Storage

Note: If the Clean Steam Generator cannot be installed and put into operation immediately upon receipt at the jobsite, certain precautions are necessary to prevent deterioration during storage.

Responsibility for integrity of the heat exchangers must be assumed by the user. Spirax Sarco will not be responsible for damage, corrosion or other deterioration of heat exchanger equipment during transit and storage. Good storage practices are important, considering the high costs of repair or replacement, and the possible delays for items which require long lead times for manufacture. The followings suggested practices are provided solely as a convenience to the user, who shall make his own decision on whether to use all or any of them.

- On receipt of the CSG-FBHP Steam Generation System, inspect for shipping damage to all protective covers. If damage is evident, inspect for possible contamination and replace protective covers as required. If damage is extensive, notify the carrier immediately and Spirax Sarco.
- If the CSG-FBHP is not to be placed in immediate service, take precautions to prevent rusting or contamination.
- Store under cover in a heated area, if possible. The ideal storage environment for CSG-FBHP and accessories is indoors, above grade, in a dry, low humidity atmosphere which is sealed to prevent entry of blowing dust, rain or snow. Maintain temperatures between 20 °C and 50 °C (68 °F and 122 °F) and humidity at 40% relative humidity or lower.

Note: Ambient temperature of the place where the unit will be installed must be above 0 °C (32 °F) and below 40 °C (104 °F).

1.15 Freezing

Precautions must be taken to protect products that are not self-draining against frost damage in environments where they may be exposed to temperatures below freezing point.

1.16 Disposal

As the product may contain PTFE and Viton, particular precautions must be adopted to avoid potential risks for health caused by decomposition or combustion of such materials. Unless otherwise indicated in the installation and maintenance instructions with regard to the materials of the seals, this product can be recycled and it is considered that no environmental risk exists deriving from disposal thereof provided that suitable precautions are adopted. However, its components can be checked to verify the possibility of safe disposal. Please visit the Spirax Sarco product compliance web pages https://www.spiraxsarco.com/product-compliance for up to date information on any substances of concern that may be contained within this product. Where no additional information is provided on the Spirax Sarco product compliance web page, this product may be safely recycled and/or disposed providing due care is taken. Always check your local recycling and disposal regulations.

- PTFE: This material can be disposed of only using approved systems and never in incinerators.
 - PTFE waste to be disposed of must be stocked in separate containers and must never be mixed with other
 waste
- Viton: VITON waste can be sent directly to landfills when permitted and accepted by local and national regulations.
 - VITON components may also be incinerated but a scrubber must be used to remove the hydrogen fluoride developed by the product, carrying out this procedure in accordance with local and national regulations. The components are insoluble in aquatic media.

Electrical:

Unless otherwise stated, the electrical components within this product are recyclable and no ecological hazard is anticipated with its disposal providing due care is taken. The product should be recycled in line with local legislation.

Please visit the Spirax Sarco product compliance web pages

https://www.spiraxsarco.com/product-compliance

for up to date information on any substances of concern that may be contained within this product. Where no additional information is provided on the Spirax Sarco product compliance web page, this product may be safely recycled and/or disposed providing due care is taken. Always check your local recycling and disposal regulations.

1.17 Return of products

Customers and stockists are reminded that, under EC Health, Safety and Environment Law, when returning products to Spirax Sarco, they must provide information regarding any hazards and precautions to be taken due to contamination residues or mechanical damage which may represent a risk to health, safety or the environmental. This information must be provided in writing, including Health and Safety datasheets relating to any substances identified as hazardous or potentially hazardous.

2. General product information

2.1 Description

The CSG-FBHP indirect clean steam generator consists of a complete, safe and functional system package, ready for installation and able to produce up to 1250/1800/2200/2900/3500/4400/5300 kg/h of clean steam (at normal operating conditions) using industrial steam as a primary energy source.

The CSG-FBHP series of indirect clean steam generators are designed to produce clean steam for direct injection processes within the food and beverage industry sector, where steam is considered as an ingredient.

The heat exchange is indirect, for which there is no contamination between the primary steam and the 'clean' steam produced.

Models and applications

Versions/Applications: FBHP Food and Beverage steam injection for high pressure applications				sure applications	
	CSG FBHP-600	maximum production capacity	5300 kg/h	(11685 lbs/hr)*	
	CSG FBHP-470	maximum production capacity	4400 kg/h	(9700 lbs/hr)*	
	CSG FBHP-375	maximum production capacity	3500 kg/h	(7716 lbs/hr)*	
Size:	CSG FBHP-300	maximum production capacity	2900 kg/h	(6390 lbs/hr)*	
	CSG FBHP-235	maximum production capacity	2200 kg/h	(4850 lbs/hr)*	
	CSG FBHP-185	maximum production capacity	1800 kg/h	(3968 lbs/hr)*	
	CSG FBHP-130	maximum production capacity	1250 kg/h	(2756 lbs/hr)*	

^(*) max steam production at reference operating conditions: primary steam at 10.8 bar g (156.6 psi g), production at 8 bar g (116 psi g), feed water at 20 °C (68 °F).

2.2 Identification of the product

The product is identified by the nameplate fastened to the frame.

The CSG-FBHP unit, (Figure 1), comprises the following main parts:

- 1 Steam generator and instrumentation/accessories, protection and safety devices
- 2 Primary steam control
- 3 Condensate removal
- 4 Feedwater inlet
- 5 Electrical control panel

For a detailed list of equipment and specifications, refer to the PandID and documentation provided.

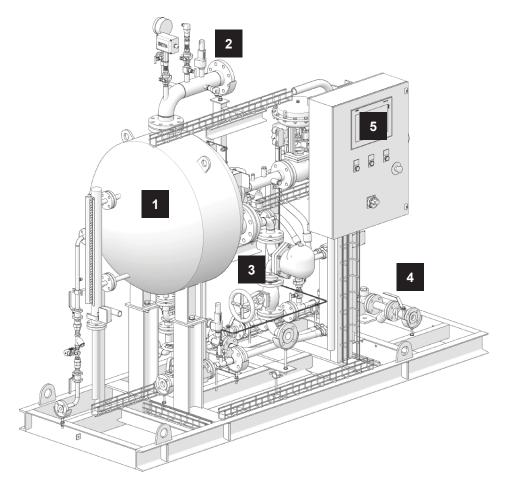


Fig. 1

Notes:

- 1. For further information concerning individual components refer to the specific technical documentation of each product.
- $2. \quad \text{Further technical information regarding the CSG-FBHP indirect clean steam generator can be found in TI-P664-05}.$

CSG-FBHP Clean steam generation system for Food & Beverage

Example of nameplate:

- 1. "CE" marking and Id. of notified body
 - Unit PED category
- 2. Unit model
- 3. Product Nomenclature Series
 - Size
 - Configuration
 - Options
- 4. Unit serial No.:

- YY: year
- XXXXXX: identification number (6 or 9 digits)
- ZZ: unit progressive number
- Year of construction
- 5. Electric and air supply specifications (where required)
- 6. Fluid group (PED), design conditions and circuit hydro test pressure

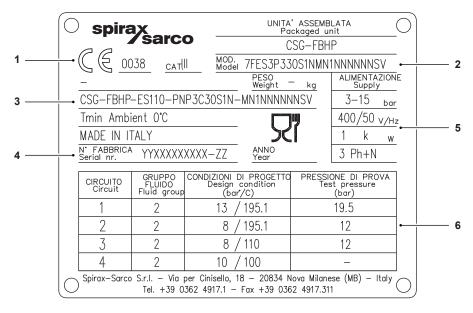


Fig. 2 Note: the pressure values in the nameplate are expressed in 'bar g'.

2.3 Product nomenclature and selection guide

The product nomenclature is based on the characteristics of the main elements and options, identified as follows:

Design code	E	EN	E
Shell Type	W	Welded – not openable	w
	130	Up to 1250 kg/h (2756 lbs/hr)	
	185	Up to 1800 kg/h (3968 lbs/hr)	
	235	Up to 2200 kg/h (4850 lbs/hr)	
	300	300 Up to 2900 kg/h (6390 lbs/hr)	
	375	Up to 3500 kg/h (7716 lbs/hr)	
Unit Size	470	Up to 4400 kg/h (9700 lbs/hr)	
	600	Up to 5300 kg/h (11685 lbs/hr)	
	Plant steam Kv (Cv)	10, 16, 36, 46, 63, 100, 160 (12, 18, 42, 53, 73, 116, 185)	10
	Feedwater Kv (Cv)	1, 1.6, 2.5, 4, 6.3 (1.2, 1.8, 2.9, 4.6, 7.3)	1
Control Valve Actuation	PN	PN Pneumatic (fail safe)	
Control valve Actuation	EL	Electric (fail safe)	PN
	P1	ABB AC500 + 7" Display	
	P2	Allen-Bradley CompactLogix 1700 + 7" Display	
Control	Р3	Siemens S7.1200 + 7" Display	P1
Control	D1	ABB AC500 (PLC + 7' display) + RUT240/RUT241 (excluding SIM and connected service)	P1
	D3	Siemens S7.1200 (PLC + 7' display) + RUT240/RUT241 (excluding SIM and connected service)	
	C0	None	
	C1	BACnet IP	
	C2	Profinet	_
	C3	Modbus TCP/IP	
Communication interface	C4	BACnet MSTP	C0
	C5	Profibus	
	C6	Modbus RTU	_
	C7	BACnet (BTL cert.) IP	
	C8	BACnet (BTL cert.) MSTP	

Product nomenclature and selection guide continued on next page

2.3 Product nomenclature and selection guide (continued)

Frame and cabinet	0	Basement and cabinet made of carbon steel, painted *	_ 0	
Frame and capinet	3	Base and cabinet made of stainless steel (304)	_ 0	
Control Panel Location	S	Side	S	
	1	Steam Generator Body only to EnEV (100 mm)		
Insulation	3	Steam Generator Body to EnEV + Piping (50mm)	_ 1	
	0	Not insulated	_	
	N	None (plates with anchor holes provided)		
Wheels and feet	F	Adjustable feet	— N	
	М	Manual stop valve		
Plant steam inlet shut-off	AE	Automatic electric isolation valve*	— м	
	N	None	N	
Plant steam line trapping	Т	Plant steam line trapping station with pocket		
	1	Timed TDS Blowdown (no control)	1	
TDS Control	2	TDS Control with external probe (discontinuous metering)		
On walls On all a	N	None		
Sample Cooler	S Sample Cooler and Sampling Valve		— N	
	N	None (water P = clean steam P + 2.0 barg)		
	P1	Pump with VFD (for 1 bar g clean steam)	_	
	P2	Pump with VFD (for 2 bar g clean steam)	_	
	P3	Pump with VFD (for 3 bar g clean steam)		
Feedwater pressurisation	P4	Pump with VFD (for 4 bar g clean steam)	_ N	
	P5	Pump with VFD (for 5 bar g clean steam)	_	
	P6	Pump with VFD (for 6 bar g clean steam)	_	
	P7	Pump with VFD (for 7 bar g clean steam)		
	P8	Pump with VFD (for 8 bar g clean steam)		
	N	None	_ N	
Plant protection	V	Viscorol with low level limit switch		
Feedwater pre-heating	N	Pre-Heating by primary steam supply	N	

Product nomenclature and selection guide continued on next page

2.3 Product nomenclature and selection guide (continued)

N	None		
I1	System Diagnostics		
13	Integrity test		
14	System diagnostics + Integrity test		
N	None		
М	Manual stop valve		
AE	Automatic electric isolation valve*		
S	EU PED test and ((marking of the assembly		
V	Viscorol (Magnetic Level Indicator)		
	11 13 14 N M AE S		

	1
N	
N	
S	
٧	

13

Product nomenclature example

CSG-FBHP E W 130-10-1 PN P1 C0 O S 1 N M N 1 N N N N N N S V

2.4 Design conditions

			EMEA	Americas
Drimon, aida	Design pressure		12 bar g	(180 psi g)
Primary side	Design temperature		200 °C	(400 °F)
	Design pressure		12 bar g	(180 psi g)
Secondary side	Design temperature		200 °C	(400 °F)
	Safety valve set pres	sure	12 bar g	(180 psi g)
	Design pressure		12 bar g	(180 psi g)
Feedwater		without pump	200 °C	(400 °F)
	Design temperature	with pump	80 °C	(176 °F)

^{*} Not all configurations are available in every country. Please contact your local Spirax Sarco representative for more details.

^{**} Enabling this option will cause the design limits for the whole package to be reduced to 10.3 bar g and 185 °C.

2.5 Operating limits

	Withou	ut pump	With	pump		
Production		Clean saturated steam, up to 8 bar g/175 °C (Clean saturated steam, up to 125 psi g /353 °F)				
Primary side	Plant steam, up to 12 bar g/200 °C (Plant steam, up to 180 psi g/400 °F) See safety valve protection					
	P min. ≥ P clean steam + 2 bar g (P min. ≥ P clean steam + 29 psi g)		Net positive suction head required (see IM)		Ambient Temperature: 0-40 °C Designed for indoor	
		g/T max 200 °C g/T max 392 °F		g/T max 100 °C g/T max 212 °F	installation only, protect from freezing.	
Feedwater	Feedwate pH Hardness Chloride Conductivity Temperature		≦ 0.02 mmol/l Please refer to the table below			
	С	ater				
				Inlet feedwater pH		
	Blowdown set	pH = 5.5	pH = 6.5	pH = 7.5		
	5%	≦ 0.5 mg/l	≦ 1 mg/l	≦ 3 mg/l	* Note	
	10%	≦ 1 mg/l	≦ 2 mg/l	≦ 6 mg/l	A single leg is taken from the three phase	
	Unit without pump		Unit with pump		supply to power the PSU, ensure the single	
Electrical supply (cabinets)	1 x 90-132 V AC or 1 x 180-264 V AC 50/60 Hz 0.4 kW (instr.) (0.37kW -		3 x 200-460 V AC* 50/60 Hz (0.37kW - 5.5kW) + 0.4kW depending upon package size and csg pressure		leg will have a voltage in the range required for single phase.	
Air supply (filters)		Minimum 5 bar g (72.5 psi g) to maximum 7 bar g (101.5 psi g) (only for the unit with pneumatic actuators or Integrity test option)				
Safety valve protection Recommended but is not fitted to the package	never be supplied	nsure that overpressure car				
Turndown	The packages have a turndown of 10:1 and therefore the minimum operating condition is 10% of the reperformance. If the Clean Steam Flow rate turndown ratio exceeds 10:1, a bespoke solution will be required this must be specified at point of order.					

To ensure the correct operation of the clean steam generator, the inlet feed water should have the following characteristics. An excess on these values can compromise the lifetime, maintenance and efficiency of the steam generator.

pH 5.5 ÷ 7.5 (at 20 °C)

Hardness

≤ 0.02 mmol/l

Chloride

Please refer to table below

(5.5 ÷ 7.5 (at 68 °F))

Conductivity ≤ 20 µS/cm

Chlorides concentration limit in inlet feed water					
Blowdown set	Inlet feed water pH				
	pH = 5,5	pH = 6,5	pH = 7,5		
5%	≤ 0,5 mg/l	≤ 1 mg/l	≤ 3 mg/l		
10%	≤ 1 mg/l	≤ 2 mg/l	≤ 6 mg/l		

^{*} All the other characteristics and values of feed water are up to end user of the plant.
In addition to the above, for monitored TDS blowdown, a maintained concentration below a maximum of 100uS/cm is required during operation.


NPSH (Net Positive Suction Head)

Class stages suggested than	CSG Size							
Clean steam pressure (bar)	130	185	235	300	375	470	600	
1	0.16	0.16	0.16	0.16	0.16	0.16	0.22	
2	0.16	0.16	0.16	0.16	0.16	0.22	0.22	
3	0.16	0.16	0.16	0.16	0.22	0.22	0.22	
4	0.16	0.16	0.16	0.22	0.22	0.22	0.27	
5	0.16	0.16	0.22	0.22	0.22	0.22	0.27	
6	0.16	0.16	0.22	0.22	0.22	0.27	0.27	
7	0.16	0.16	0.22	0.22	0.27	0.27	0.27	
8	0.16	0.22	0.22	0.27	0.27	0.27	0.27	

2.6 Dimensions and weights approximate in mm (inches) and kg (lbs) of a standard unit

	Dim	ensions mm (incl	hes)	Weights kg (lbs)		
	L Length	W Width	H Height	Empty	In operation	Maximum
130	2800 (110)	1000 (39)	2400 (94)	2100 (4630)	2250 (4960)	2400 (5291)
185	3100 (122)	1000 (39)	2450 (96)	2346 (5172)	2500 (5512)	2700 (5952)
235	3400 (134)	1100 (43)	2550 (100)	2573 (5672)	2750 (6063)	2900 (6393)
300	3700 (146)	1100 (43)	2060 (81)	2800 (6173)	3000 (6614)	3200 (7055)
375	3900 (154)	1100 (43)	2070 (81)	4968 (10953)	5200 (11464)	5400 (11905)
470	4000 (157)	1100 (43)	2080 (82)	5095 (11233)	5300 (11685)	5600 (12346)
600	4200 (165)	1100 (43)	2090 (82)	5350 (11794)	5600 (12346)	5900 (13007)

Indicated dimensions are the maximum dimensions for a specific configuration of the package.

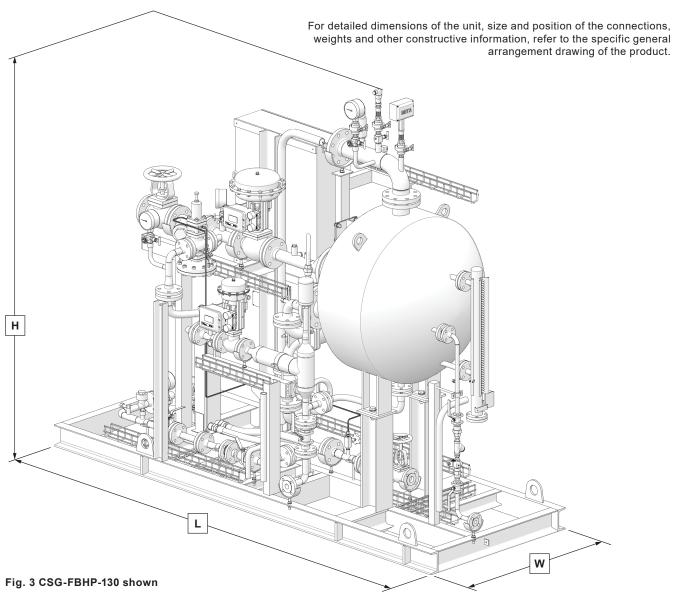

3. Installation


3.1 Installation site

The CSG-FBHP unit is designed for installation indoors with a minimum ambient temperature of 0 °C (32 °F). Installation outdoors is permitted provided that the unit is suitably protected against adverse weather conditions and freezing.

The unit is not suitable for installation in potentially hazardous zones classified as ATEX. Specific solutions can be provided on request.

3.2 Handling

The CSG-FBHP unit must be lifted from the lifting eyebolts mounted on the base of the unit.

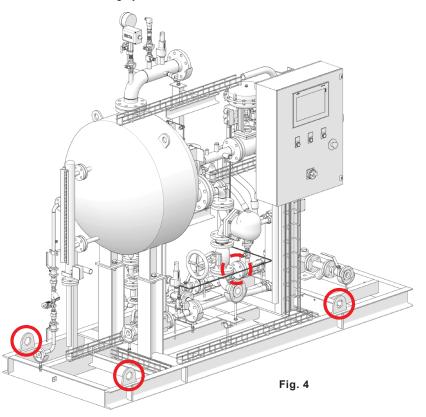



Do not lift the unit by other parts or in any manner other than as indicated above.

During lifting, take into account the high centre of gravity of the unit and adopt all the necessary precautions to avoid accidental tipping over of the unit.

3.3 Positioning and fastening

The unit must be positioned on a completely flat, horizontal surface able to support its entire weight at full load. For access to the unit, provide at least one metre of clearance around, and 0.5 m (1.64 ft) above. A space for tube bundle removal has to be considered.

3.4 Process pipework and vents

Each unit is provided complete with drawings indicating the position and specifications of connections to be made according to configuration and options ordered.

The main connections of the unit are as follows:

UNI-EN 1092-1 PN16/25/40 connection flanges ASME/ANSI B16.5 connection flanges

For other pipework, according to options installed, refer to the dimensional (or G.A.) drawing of the unit provided.

3.5 Connections

3.5.1 Metric

		130	185	235	300	375	470	600
Α	Plant steam Inlet	DN50* PN16	DN65 PN16	DN80 PN16	DN80 PN16	DN100 PN16	DN100 PN16	DN100 PN16
В	Preheater Condensate Outlet	DN25 PN16	DN25 PN16	DN25 PN16	DN25 PN16	DN25 PN16	DN40 PN16	DN40 PN16
С	CSG Condensate Outlet	DN40 PN16	DN40 PN16	DN40 PN16	DN40 PN16	DN40 PN16	DN40 PN16	DN50 PN16
D	Feedwater Inlet	DN25 PN40	DN25 PN40	DN25 PN40	DN32 PN40	DN32 PN40	DN32 PN40	DN32 PN40
E	Drain Outlet	DN25 PN40	DN25 PN40	DN25 PN40	DN25 PN40	DN32 PN40	DN32 PN40	DN32 PN40
F	Blowdown Outlet /TDS	DN15 PN40	DN15 PN40	DN15 PN40	DN15 PN40	DN15 PN40	DN15 PN40	DN15 PN40
G	Clean Steam Outlet	DN80 PN40/PN25 **	DN100 PN40/PN25 **	DN125 PN40/PN25 **	DN125 PN40/PN25 **	DN150 PN40/PN25 **	DN150 PN40/PN25 **	DN200 PN25
н	Clean Steam Safety Valve Discharge Outlet	3/4" NPT-F	³¼" NPT-F	³¼" NPT-F	1" NPT-F	1" NPT-F	1" NPT-F	1" NPT-F
ı	Plant Steam Condensate Outlet (Drain)				DN15 PN40			
L	Comp. Air Line for Integrity Test	1/4" NPT-F						
М	Pneumatic Air Supply Inlet	1/4" BSP-F						
N	Sampling system (cooling water in/out-sample out)	½" BSP- 6mm						
			Opti	ons				

- * If the Auto Plant Steam Isolation is selected, then this should be PN40.
- ** Clean steam outlet connection is PN40 or PN25 on sizes 130, 185, 235, 300, 375 and 470, depending if the option of automatic clean steam isolation is selected. However, PN25 and PN40 flange connections on these sizes are interchangeable

The steam supplied to the CSG-FBHP unit must be as dry and clean as possible in accordance with the guidelines of sound steam engineering practices. It is also necessary to verify that all pipes are suitably supported without any excessive loads or stress.




18

Before making any connection, check that all pipework is clean and free of foreign material or scale that may adversely affect functioning and/or the performance of the unit.

The steam supplied must always be maintained within design operating pressure and temperature limits. The unit shall not work above the design pressures and temperatures indicated on the name plate on the package.

The drawings provided in this manual are for guidance purposes only. For connections of the unit, always consult the attached drawings.

For imperial connections, see page 20

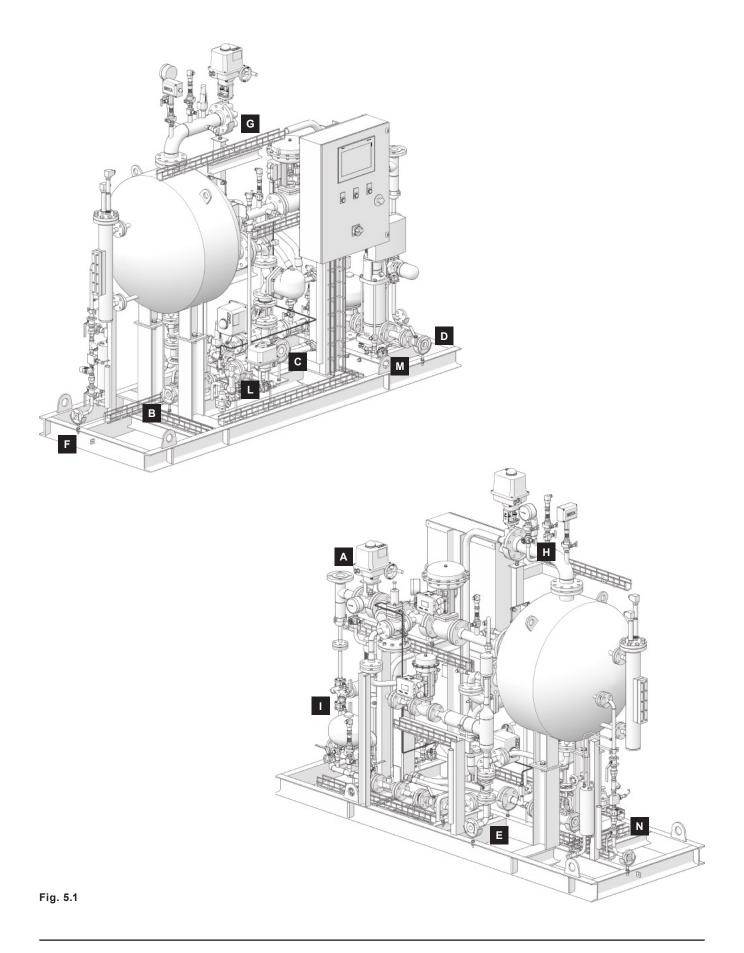

3.5 Connections

3.5.2 Imperial

		130	185	235	300	375	470	600
Α	Plant steam Inlet	2" * ANSI 150	2½" ANSI 150	3" ANSI 150	3" ANSI 150	4" ANSI 150	4" ANSI 150	4" ANSI 150
В	Preheater Condensate Outlet	1" ANSI 150	1½" ANSI 150	1½" ANSI 150				
С	CSG Condensate Outlet	1½" ANSI 150	2" ANSI 150	2" ANSI 150				
D	Feedwater Inlet	1" ANSI 300	1" ANSI 300	1" ANSI 300	1¼" ANSI 300	1¼" ANSI 300	1¼" ANSI 300	1¼" ANSI 300
E	Drain Outlet	1" ANSI 300	1" ANSI 300	1" ANSI 300	1" ANSI 300	1¼" ANSI 300	1¼" ANSI 300	1¼" ANSI 300
F	Blowdown Outlet /TDS	½" ANSI 300						
G	Clean Steam Outlet	3" ANSI 150**	4" ANSI 150**	5" ANSI 150**	5" ANSI 150**	6" ANSI 150**	6" ANSI 150**	8" ANSI 150**
н	Clean Steam Safety Valve Discharge Outlet	³¼" NPT-F	3/4" NPT-F	³¼" NPT-F	1" NPT-F	1" NPT-F	1" NPT-F	1" NPT-F
1	Plant Steam Condensate Outlet (Drain)				½" ANSI 300			
L	Comp. Air Line for Integrity Test	1/4" NPT-F						
М	Pneumatic Air Supply Inlet	1/4" BSP-F						
N	Sampling system (cooling water in/out-sample out)	½" BSP - 6 mm						
			Opti	ons				

^{*} If the Auto Plant Steam Isolation is selected, then this should be ANSI 300.

The steam supplied to the CSG-FBHP unit must be as dry and clean as possible in accordance with the guidelines of sound steam engineering practices. It is also necessary to verify that all pipes are suitably supported without any excessive loads or stress.




20

Before making any connection, check that all pipework is clean and free of foreign material or scale that may adversely affect functioning and/or the performance of the unit.

The steam supplied must always be maintained within design operating pressure and temperature limits. The unit shall not work above the design pressures and temperatures indicated on the name plate on the package.

The drawings provided in this manual are for guidance purposes only. For connections of the unit, always consult the attached drawings.

For metric connections, see page 18

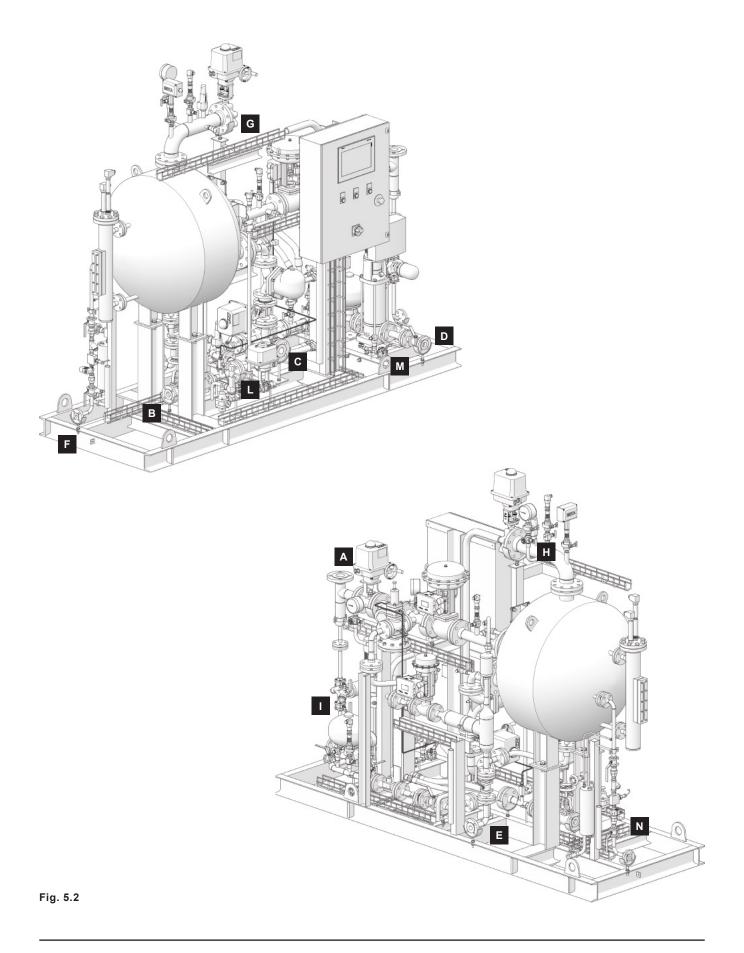

3.5.3 Feedwater inlet

The first step of the installation procedure consists in connecting the unit to the cold feedwater line. The manual isolating valve on the feedwater control line of the unit must remain closed until installation has been completed. The precise position of the feedwater inlet connections, the pipe diameter and size of the attachment flange can be deduced from the drawings provided with the unit.

3.5.4 Clean steam outlet

The next step in the installation procedure is to connect the clean steam outlet of the generator to the clean steam distribution network of the plant. The precise position of the clean steam outlet, the pipe diameter and size of the attachment flange can be deduced from the drawings provided with the unit. A manual isolating valve (if option is not selected) should be installed downstream of the unit on the clean steam line to permit isolation of the generator. This valve must remain closed until installation has been completed.

Note: In the case of units installed in parallel with another generator(s) (common clean steam distribution line), a check valve must be installed on the steam outlet of each generator.

3.5.5 Primary energy source (industrial steam)

Connect the inlet of the primary fluid of the unit to the technological steam distribution network of the plant. The manual (if fitted) isolating valve installed on the primary fluid control line must be closed and remain closed during installation. The precise position of the primary fluid connection, the pipe diameter and size of the attachment flange can be deduced from the drawings provided with the unit.



Potential risk of injury and/or fatality

3.5.6 Condensate removal

Transfer of heat from the primary steam to the produced clean steam generates condensate. The condensate removal from the unit must therefore be connected to the condensate return line of the plant. The manual isolating valve installed on the condensate removal line of the unit must be closed and remain closed during installation. The precise position of the condensate removal connection, the pipe diameter and size of the attachment flange can be deduced from the drawings provided with the unit.

Note: The preheater and the generator condensate return lines should be no greater than 0.5 bar

3.5.7 Piping the pressure relief valve to vent and drain

As required by current regulations, CSG-FBHP unit generators are equipped with a pressure relief valve to protect against the risk of overpressure. Venting of the pressure relief valve (steam) shall be directed towards a safe area to avoid injuries or damage. In most applications, the pressure safety valves should be vented to atmosphere (generally through the roof). The piping used in the vent system shall be of adequate size to handle the capacity of the pressure safety valve. The vent piping system shall be suitably drained to prevent formation of condensate inside this. **The vent pipe of the pressure relief valve shall not be intercepted in any way or even partially obstructed.** For further information and prescriptions regarding connection of the vent piping of the pressure safety valve, refer to the related use and maintenance manual. Venting of the pressure relief valve shall comply with current legislation. The purchaser/installer is responsible for such conformity.

3.5.8 Drainage of the generator

The CSG-FBHP steam generators are equipped with a drain/bottom blowdown line with manual valve installed on the lower part of the vessel. The blowdown from this valve is at the same pressure and temperature of the generated steam and can cause severe injury or death if not properly piped. In accordance with local regulations or standards, it is recommended that the blowdown lines be connected to a blowdown vessel or condensate cooler before being discharged to drain.

The precise position of the drainage of the generator connection and also pipe diameter and size of the attachment flange can be taken from the drawings supplied with the unit.

The drains of the generator cannot be placed back in the circuit return condensate or feedwater.

3.5.9 Other blowdown, venting, drainage facilities (where required)

The CSG-FBHP is equipped with a system for blowdown, drainage and venting. Optional is a TDS control system and primary steam drainage line. In accordance with current legislation, blowdown from the TDS control system should be connected to a blowdown vessel or condensate cooler before being discharged to drain. TDS blowdown shall not be connected to the condensate return line. Primary steam trapping should be connected to the condensate return line of the plant.

Condensate from the primary circuits and/or TDS blowdown should not be integrated in to the feedwater storage tank.

3.6 Connection of the power supply

For voltage connections, consult the wiring diagram provided for the unit.



Possible injury or death

Before connecting the power supply, check that the main power switch and system start selector are off (0 position).

Where indicated in the wiring diagram, single phase or 3 phase power supplies are to be connected directly to the main isolation switch. Earth points are provided and must always be connected. Power supplies and earth connections must pass through the appropriate number of cable glands to maintain the IP rating for the electrical panel.




Fig. 6
Version with single-phase power supply




Fig. 7
Version with three-phase + N power supply

All electrical connections must be made by qualified electricians.

The user is responsible for the suitability of electrical connections outside the unit and for their conformity with current legislation.

Before drilling holes in the cabinet of the control panel to connect the power cables and any interface with an external system, open the door very carefully and check that there are no obstacles inside the cabinet. Ensure that there is no contact between electrical cables inside the panel with drilling residues or with metal.



Signal cables must not be laid together with power cables outside the unit to avoid disturbances and interference during operation. Failure to comply may cause also irreparable damage to the equipment.

The user must install a device between the power supply and control panel able to cut off the power if necessary. It is important to check compatibility of the mains supply with that required by the control panel, verifying correspondence with voltage and frequency data indicated on the nameplate.

Unused wires in conduit must be grounded at both ends to avoid a possible shock hazard caused by induced voltages.

The user is responsible for power connections outside the unit and their compliance with current legislation.

3.7 Connection of air supply (where necessary)

If pneumatic actuators or integrity test options are selected, the compressed air must be as dry and clean as possible in accordance with the guidelines of sound engineering practice.

Connect the compressed air supply (minimum 5 bar g-maximum 7 bar g (72.5 psi g-101.5 psi g)) to the pressure regulators fitted on the valves (CV1 and CV2).

So, before starting, adjust the downstream pressure reducers at least 1 bar g above the spring range of pneumatic actuators (if any):

Actuator spring ranges Primary steam control valve CV1 with electro-pneumatic positioner SP400 (SP500 as option)		Feedwater control valve CV2 with I/P converter (positioner SP500 as option)
130	2 – 4 bar g (29-58 psi g)	2 - 4 bar g
All other sizes	2.5 – 3.5 bar g (36.2-50.7 psi g)	(29 - 58 psi g)

3.8 Electrical specifications

For detailed electrical information, consult the wiring diagram supplied with the unit.

Phase	Voltage ranges	Pump capability	Rated power	Suggested supply protection
Single Phase	90 - 132 V AC 180 - 264 V AC	No	0.4 kW	8A, C Curve MCB
Three Phase *	200 - 460 V AC	Yes	(0.37 kW - 5.5 kW) + 0.4 kW depending upon package size and CSG pressure	32A, C Curve MCB

^{*} Note: A single leg is taken from the three phase supply to power the PSU, ensure the single leg will have a voltage in the range required for single phase

3.9 Digital inputs/outputs (on all versions)

For wiring, consult wiring diagram provided with the unit.

24

The control system for the CSG-FBHP can provide signals to the customer to enable monitoring of the processes. This is facilitated by the use of industrial communications. The communications protocols are included in the nomenclature and are listed below.

4. Commissioning

For correct commissioning, we recommend the service and support of a Spirax Sarco engineer. Please contact your local Spirax Sarco representative for more details.

4.1 Cleaning before first use

This product is intended to be connected into a system that can operate an EC1935 compliant process. To minimise the risk of non-intentionally added substances in the system, it is essential that an appropriate CIP (cleaning in place) cycle is carried out by the end user prior to first use in a food contact application.

A list of the materials that could come directly or indirectly into contact with foodstuffs can be found in the Declaration of Compliance available for this product.

4.1.1 Pre-commissioning inspection (initial start-up)

- Upon receipt of CSG-FBHP complete the SAT check (Site Arrival Test).
- Most of the new installations during the construction of pipelines and the installation of the system, may inadvertently collect dirt
 particles inside the pipes. It is essential to carefully remove any residual impurities and dirt in them before starting the
 commissioning, see 4.1.1 Cleaning before start-up.
- Check that all the manual isolating valves (on primary stream, on condensate blowdown, on clean steam intake and on feedwater)
 are closed
- Clean the filters upstream of the regulation valves.
- Check that the bottom drain valve VM11 (or VE11) of the unit is closed.
- Make sure that the unit power supply is disconnected.
- Check that primary steam and feedwater design conditions do not exceed the rated values of the unit.
- Check that the design conditions of the downstream system, clean steam side, are not lower than the rated data of the unit or in any case not lower than the calibration pressure of the safety valve installed on the unit, secondary side.
- Check that the feedwater line is properly pressurised and has been vented.
- Check that the supply steam (primary) line is properly pressurised and has been drained/vented.
- Check that the clean steam line has been drained/vented
- Check that the air supply line, if any, complies with system requirements.
- Check that the power supply complies with the system requirements.
- Make a double check to verify that all connections to steam, condensate and water lines have been made correctly.
- Check that the bolts of the flanged attachments are correctly torqued, see 11. Appendix.
- Check that all the electrical connections outside and inside the unit, are verifying compliance with the wiring diagram (see wiring diagram supplied with the unit).
- Check the air supply of the filters/reducers of the valves (actuated pneumatically where established) and that it complies with the system requirements.
- Check that the preheater clean steam pressure reducing valve (VU33) is fully wound off (no steam can flow).
- Check that the air vent drain is routed to a safe place (if this is vented externally, consider including a tee that can be isolated (see 4.5)

4.1.2 Cleaning before start-up

The clean steam generator is supplied after a pickling and passivation cycle.

Before the first use a purge cycle must be performed. This takes place after a CIP (cleaning in place) or other procedure that may be required by the process/plant directives. This is done by following the process in the below table that shows the time each cycle should last for in order to sufficiently flush the CSG.

Clean Steam Pressure (bar g)	No. of 30s open, 30s off intervals (full minutes for test)
1	16
2	11
3	9
4	8
5	7
6	6
7	6
8	6

4.2 On-site commissioning procedure

The CSG-FBHP control system has an integrated commissioning sequence designed to guide the user through configuring, starting and tuning the systems PID settings from factory.

It is assumed at this point that all required pipe connections and services have been connected. To begin the commissioning sequence, all connected services must be available and all critical alarms must be cleared.

- 1. Using the Bolt torque table, ensure that all fittings and flanges are tightened to their correct settings. Ideally, these should be identified with a marking compound to allow checks before proceeding, see 11. Appendix.
- 2. Close all manually operated steam isolation valves and provide steam to that part in the line. If automated isolation valves have been fitted, open all manually operated steam isolation valves.
- 3. Open all manually operated condensate valves from the customer's connection.
- 4. Open any manually operated valves downstream of the TDS valve VE12.
- 5. If Integrity test option is fitted, open any manually operated valves connected the Drain Valve VE11.
- 6. Open any manually operated valves upstream water inlet to the CSG-FBHP.
- 7. Ensure that all trip switches inside the control panel are set to on.
- 8. Switch the control panel isolator to the On position.
- 9. Check that all pneumatic positioners (if fitted) are set to Auto.
- 10. Power on the control panel and wait for the Spirax Sarco welcome page.
- 11. Tap the welcome page to view the Home Screen.

12. At the home screen, select the Main Menu button.



PLC platform	Login level	User login	Password	
	User level login	Not required	Not required	
Allen Bradley	User level operator	User	1111	
	Customer engineer	Engineer	7452	
Siemens	User level login	Not required	Not required	
	User level operator	Not required	1111	
	Customer engineer	Not required	7452	
	User level login	Not required	Not required	
ABB	User level operator	Not required	1111	
	Customer engineer	Not required	7452	


13. Select the System Menu button.



14. Select the Service screen button.



- 15. Select "First Start Up" button and confirm.
- 16. Input the correct clean steam pressure set point



- 17. Follow the on screen instructions.
- **18.** If, as part of an integrity test, a leak is detected, repair the leak and repeat the test. It may be necessary to turn off the control panel to fix the leak. Repeat steps 17-21 to restart the commissioning sequence and re-check for any leaks.

19. At the PID Tuning screen, the control system can now simulate high loads and low loads to allow the PID settings to be changed to ensure correct running of the unit.



20. At least one high demand simulation and one low demand simulation is required to complete the commissioning sequence. Select the green tick button to complete.



The commissioning sequence is now complete and the unit will continue to run at the selected pressure and level set points.

The default settings loaded during the commissioning sequence should be sufficient for the majority of simple applications. However, process settings and alarm settings should always be adjusted to suit individual applications and installations.

Once the commissioning sequence has been completed, the settings should be saved from the Factory settings screen. These settings can be updated or loaded from the Factory settings screen on the HMI.



- 21. Once the CSG-FBHP is running at the operating flow required for the process, set the VU33 preheater valve
- 22. Once the CSG-FBHP is running at the operating pressure, the CAH01 Blowdown Controller can be calibrated. Refer to IM-P693-39 BCR3150 Blowdown Controller to do this.

Note - If the operating pressure of the CSG-FBHP is changed, the CAH01 Blowdown Controller will need to be recalibrated. See 4.6 Changing the operating pressure

4.3 Start-up procedure

Once the commissioning procedure is complete, the CSG-FBHP can now be started from the Home screen.

- If automated plant steam isolation valves have been selected, open any manually controlled valves upstream.
- Follow any on screen instructions.



4.4 Shut-down procedure

Once the unit has begun its start-up sequence, the start button is replaced with the Stop button.

- Follow any on screen instructions.



4.5 Setting the VU33 control valve

The VU33 should be set on commissioning and whenever either the clean steam pressure or the primary pressure has been changed. The VU33 preheater temperature control valve should be set once the CSG-FBHP is running and has been tuned to the operating load for the process. This is because the VU33 valve set point should be set according to the feedwater flow rate.

If the primary pressure of the installation has increased, the VU33 can continue to be adjusted from its previous set point. If, however, the primary pressure on the installation is decreased, shut the VU33 valve and then slowly adjust it to bring it to the target temperature.

To set the VU33 valve, first ensure that the valve is fully wound off (no steam can pass). Slowly open the VU33 valve to raise the temperature of the preheater. Set the VU33 to 0.6 bar above the clean steam pressure.

Following this, ensure that the TA11 temperature matches the target temperature for the process. The below table can be used to establish the correct temperature. The HMI home screen can be used to view the TA11 temperature by pressing below the CSG-FBHP image.

Clean steam pressure (BAR gauge)	TA11 target temperature
1	120.42
2	133.13
3	143.75
4	151.96
5	158.92
8	175.43

Finally, check for small amounts of steam emitting from the degasser vent. If the degasser is vented externally or at a distance to the degasser, consider installing a tee that can be isolated next to the degasser. With this method, the degasser can be vented next to the degasser for the steam check during commissioning and then isolated and vented externally afterwards.

4.6 Changing the operating pressure

When a change is required to the CSG-FBHP operating pressure, some of the equipment will need recalibration. Ensure the following points are met every time there is a change to the operating pressure:

- Set pressure in Babystar expansion vessel to 0.7x pump pressure (only when pump is specified)
- Set DP27E according to operating pressure/temp
- Calibrate TDS blowdown controller (when conductivity probe is spec'd)
- Tune PID settings for the operating conditions
- May require different valve trims in feedwater control valve and plant steam control valve

Contact Spirax Sarco to discuss changes in operating clean steam pressure to determine valve trim requirements

Note: Max output capacity of clean steam generator will be reduced if the clean steam set pressure is reduced.

4.7 Ambient conditions

When the unit is out of service in a low ambient temperature space, with a risk of freezing, it is necessary to completely empty the unit.



Ice inside the generator and inside primary steam line/condensate and feedwater can severely damage the equipment

5. System controls

The CSG-FBHP control system has a range of controls and functions to ensure the safe and stable running of the unit. Not all functions are available depending upon the configuration of the CSG-FBHP, these are denoted by the * symbol.

5.1 Runtime controls

Runtime controls affect the response of the CSG-FBHP and are only active whist the unit is 'running'. During standby, these controls are not enabled.

5.1.1 Automated start-up

The Automated start-up sequence controls the safe start-up of the CSG-FBHP from cold and empty condition all the way through to fully pressurised and correct water level.

Detailed instructions can be provided by a Spirax Sarco engineer, however a simplified sequence can be found below.

- Raise water level to set point.
- Open automated clean steam outlet isolation valve (if fitted).
- Open automated plant steam isolation valve (if fitted).
- Control valve opens a small amount to warm up unit.
- 105 °C (221 °F) clean steam temperature is measured.
- 0.5 bar g (7.25 psi g) clean steam pressure is measured.
- Ramp up pressure to set point.
- Check for pressure and water at correct set point.
- Open preheater supply valve
- Check for preheater temperature
- End sequence and start run mode

5.1.2 Automated recovery

If the CSG-FBHP is still hot or pressurised from previous use, the control system can restart the unit without having to gently warm up the heating coils.

Detailed instructions can be provided by a Spirax Sarco engineer, however a simplified sequence can be found below.

- Maintain current water level or raise to set point.
- Open automated clean steam outlet isolation valve (if fitted).
- Open automated plant steam isolation valve (if fitted).
- Ramp up pressure to set point.
- Check for pressure and water at correct set point.
- Open preheater supply valve

- Check for preheater temperature
- End sequence and start run mode






5.1.3 Automated sequenced shut-down

The automated shut-down sequence ensures that he unit is in an optimal condition such that, when it begins the start-up sequence, the time taken is to reach running conditions is as little as possible.

This includes reducing the water level to the 'low level' so that less time is required to reach saturation temperature.

Detailed instructions can be provided by a Spirax Sarco engineer, however a simplified sequence can be found below.

- Ramp down steam set point to 0.
- Close automated plant steam inlet (if fitted).
- Wait for water temperature to drop below 110 °C (212 °F).
- Stop water control.
- Close outlet isolation valve (if fitted).
- Close preheater supply valve.
- End sequence and start standby.



Control of the clean steam pressure is maintained by use of a PID control loop program in the PLC using pressure sensor PA21 as the process variable. See section 9 for component map. The steam PID set point (set during commission sequence) can be adjusted from the Process Settings screen. The steam PID control value is sent directly to the steam control valve VB31.

The Steam PID set point value can be overridden by the PLC during several processes. These include Ramp up/down (see section 5.1.7), Forward controls (see section 5.1.8) and PID tuning (see section 5.3).



5.1.5 Water level control

Control of the water level within the clean steam side of the CSG-FBHP in maintained by use of a PID control loop program in the PLC using level sensor LA11 as the process variable. The water level PID set point (set during commissioning sequence) can be adjusted from the Process settings screen. The water level PID control value is sent directly to the water control valve VB01.

The water level PID set point can be overridden by the PLC during several processes.

These include Forward controls (see section 5.1.8), Automated start-up (see section 5.1.1), Automated recovery (see section 5.1.2) and Automated shutdown (see section 5.1.3).

During normal operation the valve will maintain a minimum opening. This can be configured in the settings sheet.



Set the pump pressure difference.

This should be set between 0.8 - 2bar and is used to ensure the feedwater pressure is greater than the clean steam pressure, to ensure flow through the system. The pressure difference should be great enough to ensure sufficient flow to the steam generator to maintain the water level at the set point.

Set the VB01 minimum opening %.

This should be sufficiently small to not increase the water level at minimal load condition.



31

CSG-FBHP Clean steam generation system for Food & Beverage

5.1.6 TDS control

Some TDS controls are only available with the correct options fitted when ordering the CSG-FBHP. The following options may be available on screen if fitted. All automated TDS controls are only enabled when in Run mode. All settings are accessible from the TDS Settings screen in the Process settings area.



5.1.6.1 Interval control

Available across all TDS control options, Interval control relies on 2 timers to open and close the TDS valve VE12.

If either of the conductivity sensor options are fitted, a limit value for the TDS will still be set on screen and used for process diagnostics.



5.1.6.2 Pulsed hysteresis control*

With the inclusion of a conductivity sensor CA11 fitted in the TDS blowdown line of the CSG-FBHP, the conductivity of the water can only be monitored when the TDS valve VE12 is open. The interval and duration of these checks must be set to allow a reliable TDS value to be read.

If, whilst the TDS valve is open, the conductivity reading is above the TDS setpoint, the valve will remain open until the conductivity reading reduces by the Hysteresis set-point.




5.1.7 Ramp up/down

32

At the initiation of the Clean Steam pressure control, the set-point sent to the PID program is always ramped up from 0 to the desired set-point over a period of time. This ramp up is used in the automated start-up and recovery sequences.

Similarly, if the clean steam pressure set-point is altered whilst the CSG-FBHP is running, the ramp sequence will alter the set-point over the ramp period.

The ramp up and ramp down time period can be altered on the Process Settings screen.



5.1.8 Forward controls

Forward controls are used to anticipate extra-ordinary running conditions in order to ensure safe and reliable running of the CSG-FBHP. There are two conditions that are monitored and two respective controls processes designed to handle them. The Forward Controls settings page can be found in the Process Settings area.



5.1.8.1 Rapid high demand

If a significant and prolonged period of high demand results in a drop of Clean Steam pressure PA21, then the water level set-point is temporarily raised. This is designed to anticipate the rapid level loss due to flash boiling of the water in the CSG-FBHP due to the drop in pressure.

The values used for the Clean Steam pressure drop, duration of the drop, the raise in water level set-point and the duration of the set-point raise can all be set from the Forward Controls settings screen.



5.1.8.2 Rapid low demand

If a rapid spike in Clean Steam pressure PA21 is detected, then the set-point used for the Clean Steam pressure is temporarily lowered. This is designed to reduce the amount of energy in the CSG-FBHP and reduce the risk of over-pressurisation.

The values used for the Clean Steam pressure raise rate, reduction of the Clean Steam pressure set-point and duration of the set-point raise can all be set from the Forward Controls settings screen.



5.1.9 Water pump*

If the integrated booster pump is fitted, CSG-FBHP can independently control water pressure fed directly to the Clean Steam side. The control signal sent to the pump is a target pressure to which the pump drives to. The target pressure is calculated as the pressure currently detected Clean Steam Pressure PA21 + Pump offset. The pump can also be set to maintain a continuous pressure rather than an offset. This is option is only available at commissioning by a Spirax Sarco Engineer. The Pump offset or fixed setpoint can be set from the Water PID settings page in the Process Settings area.



As the pump has its own control system, no bypass loop is required to prevent over-pressurisation.

5.1.10 Ball Valve anti-binding*

The ball valve anti-binding sequence ensures that ball valves which are subjected to prolonged periods in the open position do not stick. To do this, any ball valves fitted to the CSG-FBHP that are in the open position at midnight each day are given a closed signal for 1 second. After this 1 second closed signal, valves will return to their open position.



5.1.11 High water level control


If, whilst in Run mode, the water level in the CSG-FBHP triggers the Control Band high alarm (see section 6.1), the TDS valve VE12 is opened. When the water level returns to the operating set-point, the TDS valve closes.



5.2 Manual controls

All manual controls are accessible from the Override screen in the System area. All fitted automated valves fitted to the CSG-FBHP are able to be controlled manually whist the system is in Standby mode. Whilst the system is in any other mode, manual controls are not available.

On/off valves can be opened or closed using their respective toggle button on the screen. Control valves can be moved to a specified position once the valve has been enabled. Disabling the valve will return the valve to closed position.



A warning is displayed if the clean steam temperature inside the CSG-FBHP has exceeded 100 °C (212 °F). This is to prevent accidental discharge of hot water or steam.



5.3 PID Tuning

34

PID Tuning is a series of processes that allow the system to simulate loads rises and drops on a running CSG-FBHP. In order to do this, the PID Tuning sequence reduces the current Clean Steam Pressure set-point by 1 bar g (14.5 psi g).

Once the CSG-FBHP is running at the PID Tuning set-point, the user can either instantaneously; increase the set-point by 0.5 bar g (7.3 psi g) to simulate high demand, or decrease the set-point by 0.5 bar g (7.3 psi g) to simulate low demand. With either of the simulations, the PID controller will now react accordingly allowing the user to set P, I and D values for both water control and steam control to ensure safe and stable running.



The PID Tuning screen is accessible as part of the commissioning sequence, from standby by selecting the 'PID Tuning Sequence' button, and whilst running by selecting 'Running PID Tuning'.

If PID tuning is initiated from standby or commissioning, the CSG-FBHP will start normally using the Automated Start-up sequence as described in section 4.2.

If Running PID tuning is selected, the system will reduce the clean steam pressure set-point by 1 bar g (14.5 psi g) and the PID tuning screen will be visible.

5.4 Optional functions

All functions in this section are part of the optional features packs and will not be available without the correct configuration.

5.4.1 Integrity test*

The integrity test option includes all the necessary valves and measurement equipment to fully isolate the inlet steam side of the CSG-FBHP from the Steam Control valve VB31 to the Condensate Isolation valve VE51 and perform a pneumatic pressure decay test. This test, when selected will be conducted at the beginning of the next Automated Start-up sequence. At the end of a failed Integrity Test, the user will be prompted to either re-test, stop the start-up sequence or ignore the test and continue the Automated Start-up. Successful test will not provide any feedback and continue with the Automated Start-up sequence.



An Integrity test will always be performed at the First Start-up as part of the commissioning sequence. This test cannot be ignored. The Integrity test can only be re-started or stop the Automated Start-up sequence entirely.

5.4.2 Service sequence*

In order to facilitate the safe and easy maintenance of the CSG-FBHP, a guided service sequence is available to give a servicing engineer the ability to verify valve operation and clean the heating elements.

Whilst the service sequence is in operation, the CSG-FBHP cannot go into run mode or begin Automated Start-up.

The Service Sequence initialisation is located in the Service screen in the System area. Operators are instructed to manually isolate all external connections to and from the CSG-FBHP. This includes plant steam, drain, water, condensate and clean steam lines.



In order to ensure that components are safe to operate independently, a series of temperature and pressure sensors are located throughout the CSG-FBHP. If a temperature above 25 °C (77 °F) or pressure of 0.1 bar g (1.45 psi g) is detected at any point, all controls are automatically set to a safe position and the service sequence is halted.

Prior to and during the 'Cleaning' phase, the screen will indicate a safe (green), not safe (red) indicator next to each sensor monitored around the CSG-FBHP to allow the engineer to identify if it is safe to remove components on the unit. At this stage, if the control panel is powered down, the service sequence is retained within the memory of the controller and will return to the same point when power is returned to the panel. This ensures that the Automated Start-up sequence cannot be initiated if components are missing from the CSG-FBHP.

5.4.3 Performance monitoring*

Performance monitoring is a series of sampling, calculation and comparison algorithms that map the performance of the CSG-FBHP over the full range of operation flow ranges. The flow ranges for each model of the CSG-FBHP are preloaded into the program and are automatically loaded during the commissioning sequence. With a performance map, the performance of the CSG-FBHP can be monitored for leaks in or scaling on the heating elements.



35

The sampling period is limited to a maximum of 10 samples over the flow range or 100 hours of running. After this period the CSG-FBHP is assumed to no longer be operating under best conditions. Without a minimum of 3 samples, the calculation and comparison algorithms will not operate. Once sufficient data has been collected and the calculation algorithm has been allowed to run, the comparison algorithm can now compare the current run conditions with the ideal model created by the sampling algorithm.

The Performance Ratio Fault Tolerance value is a percentage difference when comparing the mapped value to the current sampled value. Sample exceeding the positive tolerance value are experiencing a drop in performance (typically due to scale build up), while samples dropping below the negative tolerance value are experiencing abnormal increase in energy transfer (typically due to a leak from the plant steam directly into the clean steam). Respective alarms are shown in the alarm screens when tolerances are exceeded. Settings, live readouts and mapped data from the Performance Monitoring algorithms can be found on the Performance Data area of the HMI.

HINT: Key to the accuracy of the Performance Monitoring is the accuracy of the sample data. Specifically ensuring that the measured water flow is as steady as possible. To facilitate this, a series of data filters are available to ensure that flow readings are kept free from anomalous spikes and drops.

CSG-FBHP Clean steam generation system for Food & Beverage

5.5 Emergency stop

The emergency stop program constantly monitors a set of diagnostic systems and will prevent the running of the CSG-FBHP if any of these diagnostics triggers and alarm. The emergency stop can only reset and allow the running of the system when the cause of the alarm is cleared. In addition to the cleared alarms, the Reset pushbutton must also be pressed to clear the Emergency Stop.



When the emergency stop is triggered, the status of the CSG-FBHP is changed directly to 'Emergency Stop', overriding any previous run status. Additionally, all automated isolation valves are reset, control valves are closed and the water pump (if fitted) is disabled. The diagnostics systems monitored vary depending upon the current run status. For any run status other than Running (i.e. Automated start-up, restart, sequenced shutdown, integrity test and standby) the systems are listed below. See section 6 for more details on individual diagnostics.

- Emergency stop push button
- Major Instrument failure
- Steam control valve failure
- Water control valve failure
- Water pump failure*
- Process limit switches
- Air pressure failure*
- Water supply failure.*
- Electric valve condition alarm

When the CSG-FBHP is in Running mode, the following alarms are monitored:

- Emergency stop push button
- Major Instrument failure
- Steam control valve failure
- Water control valve failure
- Water pump failure*
- Process limit switches
- Air pressure failure*
- Water level low limit*
- Electric valve condition alarm
- Supply pressure failure*
- Water level control failure
- Water supply failure*
- Water level high limit
- Optional E-stops
- Preheater temperature low
- Preheater temperature high

6. Diagnostics

Not all diagnostics are available depending upon the configuration of the CSG-FBHP, these are denoted by the* symbol.

6.1 Control bands

Clean Steam Pressure Control and Water Level Control are both monitored by separate Control Bands, however both control bands operate the same way.

Control Bands monitor their respective process value and compare to the set-point. Upper and lower bands are defined by percentage value from the set-point. If the process value exceeds either the high or low band tolerances a timer is started. If the timer exceeds the Band Alert time a Control Band Alert is issued to the Alarms screen.



If the process value continues to exceed the band tolerances and the timer continues past the Band Alarm time, then a Control Band Alarm is issued to the Alarms screen. If the process value returns to within the band tolerances, the timer is reset. Control Bands only monitor in Run mode and not in the PID Tuning sequence. Alarms and Alerts reset when the process value returns to within the upper and lower bands.

Note: Control Band alarms are used by other diagnostic systems. Correct setup at commissioning is critical to robust controls, accurate diagnostics and reduction of nuisance alarms.

6.2 Control capacity

The Control capacity diagnostic monitors both the control value from the PID program and the Control band high alarm for the respective process. This provides engineers with a tool to identify if the capacity of either of the control system is at it's limit and thus impacting performance of the CSG-FBHP.

Clean steam pressure control and Water level control are both monitored by separate Control Capacity diagnostics, however both operate the same way.

If the control valve is fully open for a period of time and the Control band high alarm is active, then the Control Capacity alarm is triggered. If the control valve is fully open for a period of time and the Control Band high alarm is not active, the Control capacity alert is triggered.



Alarms and Alerts reset when the control valve closes from being fully open.

6.3 Water Level Failure

The Water Level Failure diagnostic monitors the High Water Level Control system (see section 5.1.11). If the High Water Level cycle is triggered a number of times within a certain time period, the Water Level Failure alarm is triggered.

The number of repeated triggers and timer period are editable on the HMI.

The alarm is only reset when the Reset pushbutton is pressed.

6.4 High water limit

The High water limit diagnostic monitors the Level sensor LA11 to stop the CSG-FBHP over filling. When the water level sensor reads the measurable limit, the High Water Level alarm is triggered.

The alarm is reset when the water level reduces below the measurable limit.



6.5 Panel temperature limit


The panel temperature of the CSG-FBHP is monitored by a PT100 temperature sensor located inside cable trunking of the electrical panel TAX1. If the temperature exceeds the maximum ambient operating temperature of 55 °C (131 °F), the Panel Temperature Alarm is triggered.

The alarm is reset when the measured temperature reduces below 50 °C (122 °F).

6.6 High pressure limit

Each CSG-FBHP is fitted with a mechanical pressure switch PD21 set to the maximum operating pressure for the unit. This switch is set by the manufacturer prior to dispatch. This pressure switch triggers the Process limit switch alarm.

The alarm is reset when the clean steam pressure is low enough for the mechanical pressure switch to reset.



6.7 Low water level limit*

The Low water level limit diagnostic prevents the exposure of the heating elements.

If the level sensor LA11 gives a reading of less than 40% the Low water level limit alarm is triggered.

The alarm is reset by the water level raising enough to be above 40% on the level sensor.



6.8 Water pump fault*

The optional integrated water pump MB01 provides an simple diagnostic feedback signal MD01 which is only triggered when there is a fault with the pump or the control of the pump pressure.

The alarm is cleared when the fault is cleared from the water pump.



6.9 Water supply failure*

The Water supply failure diagnostic monitors the water supply pressure PA01 and only activated when the integrated water pump is not fitted.

When active, the water supply pressure is compared to the control pressure that would be sent to the integrated pump (see section 5.1.9). If the supply pressure is below the control signal, the Water supply failure alarm is triggered.

The alarm is cleared when the supply pressure exceeds the control signal that is generated for the water pump.

6.10 Pneumatic supply failure*

38

When fitted, the Pneumatic supply pressure switch PDX1 is used to monitor the compressed air supply to the CSG-FBHP. If the air supply pressure drops below the minimum required pressure, the alarm is triggered.

The alarm is cleared when the pneumatic supply pressure increases above the minimum required pressure.

6.11 Supply steam failure*


The Supply steam failure diagnostic monitors the control signal sent to the Steam control valve VB31 and the Steam inlet pressure PA13 whilst in the 'Running' state. When the control signal requests the control valve to be fully open for longer than 60 seconds and the Steam Inlet pressure is below the current clean steam oressure set-point. The alarm is triggered.

The alarm is cleared once the pressure rises above the clean steam pressure set-point.

6.12 TDS limit*

When fitted with a conductivity sensor CA11, the TDS limit diagnostic monitors the conductivity and will trigger an alarm if the TDS set-point is exceeded for a period of time.


The alarm is cleared when the measured conductivity is reduced below the TDS set-point.



6.13 TDS hysteresis fault*

The TDS hysteresis fault diagnostic closely monitors the TDS control system, specifically the Hysteresis controls. When hysteresis is engaged and the TDS valve is opened, a timer is started. If the timer expires before the measured conductivity reduces by the hysteresis setting, the alarm is triggered.

The alarm is reset when the measured conductivity reduces by the hysteresis setting.



6.14 Trap alarms*

The Trap alarm diagnostics can be split into two conditions based around the two alarms.

The alarm for either condition is reset by pressing the Reset pushbutton.



6.14.1 Trap fail open

During normal running conditions, the trap of the CSG-FBHP will be constantly discharging condensate. As such a failed open trap would not be easily detectable. However, at low flow conditions, it is easier to identify the trap discharging excessive amount of condensate and eventually live steam.

The Trap Failed Open alarm is triggered when the control valve is only open a small amount, and the condensate temperature sensor TA51 and the drain temperature sensor TA52 are similar temperatures. The maximum valve temperature and maximum difference between temperature sensors can be set on the HMI.



6.14.2 Trap failed closed

The Trap failed closed alarm monitors the drain temperature sensor TA52. Based on the below calculation, the minimum operating temperature of the drain condensate after the trap can be determined. If, whilst in Running status, the condensate temperature drops below this temperature, the Trap Failed Closed alarm will activate.



Note: there are many causes of blockages in the condensate line that can cause the measured drain temperature to drop below minimum operating condensate temperature. If after investigation, the trap is operating properly, there may be another cause for the backup of condensate, including external to the CSG-FBHP.

6.15 Valve feedback*

The Steam control valve VB31 and the Water level control valve VB01 are both monitored by separate Valve Feedback diagnostics, however both operate the same way. The valve feedback diagnostics are disabled during the Service Sequence (see section 5.4.2).

4-20mA

The valve feedback diagnostic monitors the control values sent to the control valve compares this to the valve feedback signal for their respective control valves (Steam control valve feedback VA31, Water level control valve feedback VA01). A positive and negative tolerance from the control signal is calculated. If the valve feedback is not within that tolerance, a timer is started. If the timer expires, the alarm is triggered.

The alarm is reset when the control valve feedback reads within the position tolerance.

6.16 Isolation valve feedback*

The Steam inlet VE31, Clean steam outlet VE01, Bottom drain valve VE11 are independently monitored by separate Isolation valve feedback diagnostics.

6.16.1 Fail closed

If the valve does not rotate enough to come off the valve closed limit switch within a time limit when commanded, the valve failed closed alarm is triggered.

The alarm is reset when the valve rotates enough to turn off the valve closed limit switch.

6.16.2 Fail open

If the valve does not rotate enough to come off the valve open limit switch within a time limit when commanded, the valve failed open alarm is triggered.

The alarm is reset when the valve rotates enough to turn off the valve open limit switch.

6.16.3 Partial open failure

If, when commanded, the valve takes too long to transition from closed to open, or from open to closed, the Partial open failure alarm is triggered.

The alarm is reset of the valve completes the rotation and triggers the correct limit switch.

6.16.4 Open speed

40

If, when commanded, the valve opens too quickly, the Open speed alarm is triggered. The alarm is reset when the correct valve opening speed is achieved.

6.17 Analogue input diagnostic

The Analogue input diagnostic is able to detect if an analogue input signal has been electrically disconnected from the system (sensor failure, wires disconnected, etc), or if the signal wires have been directly connected (wires pinched or damaged). The Open circuit alarm and Short circuit alarms are triggered respectively.

The alarms are reset when a correct input signal is detected.

6.18 Optional E-stop triggers

All alarms, not already included in the Emergency stop sequence (see section 5.5), have the option of triggering an emergency stop. When enabled, the alarms must be cleared before the emergency stop sequence can be reset.



6.19 Umbrella alarms

Umbrella alarms are not directly displayed on the Alarms page of the HMI. These alarms are collective names given to alarms used in the Emergency stop sequence (see section 5.5)

6.19.1 Major instrument fault

The Major instrument fault covers the analogue input alarms for all sensors that are essential the safe running of the CSG-FBHP. If any of these analogue input alarms are triggered, the Emergency Stop sequence will be started and will not be able to be reset until the alarms are cleared.

The following Analogue Input Diagnostic alarms are included in the Major Instrument Fault umbrella alarms:

- Clean steam temperature TA21
- Control panel temperature TAX1
- Water pressure PA01‡
- Clean steam pressure PA21
- Water level I A11

6.20 Steam control valve failure

The Steam control valve failure covers all diagnostics related to the Steam control valve VB31. If any of the alarms associated with these diagnostics are triggered, the Emergency stop sequence will be started and will not be able to be reset until the alarms are cleared.

The following diagnostic alarms are included in the Steam control valve failure umbrella alarm:

- Valve Feedback analogue input diagnostics VA31
- Valve Feedback diagnostic VA31

6.21 Water level control valve failure

The Water level control valve failure covers all diagnostics related to the Water level control valve (VB01). If any of the alarms associated with these diagnostics are triggered, the Emergency stop sequence will be started and will not be able to be reset until the alarms are cleared.

The following diagnostic alarms are included in the Water level control valve failure umbrella alarm:

- Valve feedback analogue input diagnostics VA01
- Valve feedback diagnostic VA01



6.22 Preheater Thermal Cycling

The TA11 sensor is used to monitor preheater thermal cycling. When a sufficient temperature change takes place within the preheater, this is recorded against the maximum number of thermal cycles the preheater can endure before it requires replacement. An alarm will be triggered when the preheater is due to be replaced.

6.23 Preheater temperature monitoring

The TA11 sensor is also used to monitor against over and under temperature, measured against the TA21 sensor. A low band alarm is generated if the preheater temperature drops below 2.5°, and a high band alarm is generated if the preheater raises above 2.5°. These settings are fixed and cannot be edited.

The alarm only appears if the measured temperature is outside of these limits for greater than 20 minutes. The monitoring has been developed to support effective preheating of the feedwater. Optimal removal of non-condensible gases (NCGs) are removed in the degasser only when the preheating target has been met. NCG removal is an important feature for the prolonged longevity of the main heat exchanger to reduce the risk of stress corrosion cracking. The alarm is used to identify that the preheating control valve (VU33) requires re-setting and thus the level of NCGs entering the main heat exchanger can be restored.

7. Troubleshooting

Alarm		Alam		Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
1	ALA_PERF_ CACL	Heat exchanger scaling alarm	-	Begin to lose flow capacity	More primary steam required	Scale formation on heating element	
2	ALA_PERF_ LEAK	Supply steam leaking through to clean side alarm	to		Over pressure during low flow conditions	Leaking from primary to secondary side	
3	ALA_TEST_LEAK	Integrity test pressure rise alarm	-	Pressure check loop (x5)	Alarm displayed on HMI	Temperature in CSG causes air temperature to rise	
4	ALARM_SERV_ STOP	Temperature or pressure alarm in service sequence	Hot pipes		Temperature or pressure detected	System isolation not complete	
5	CA11_ANLG_ ALA_OPEN	Water conductivity Analog input alarm circuit open	Cables removed from sensor	-	Flashing conductivity readings	Wire removed from sensor Sensor failure BC3250 controller	
6	CA11_ANLG_ ALA_SHRT	Water conductivity Analog input alarm short circuit	Pinched cable from sensor	-	Flashing conductivity readings	failure Wire pinched or kinked Sensor failure BC3250 controller failure	_

		Component				Cause				
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action		
-	-	-	_	_	P	oor water quality/wate	r hardness	Remove and clean heating elements		
					1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			Improve water quality		
						Maufacturing fa	ult	Replace heating element		
-	-	-	-	-	Fatigue			Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.		
PA31	Pressure sensor	Analogue input	3	1	Latent hea	t in CSG causes test a pressure to ris		Wait for test loops to complete or pass		
					7	COND_TEMP_HI	Condensate temperature hot			
					11	FEED_PRES_HI	Feedwater pressurised			
					12	FEED_TEMP_HI	Feedwater temperature hot			
					25	PRI_PRES_HI	Primary side pressurised			
-	-	-	-	-	27	PRI_TEMP_HI	Primary side temperature hot	Inspect isolation valves		
					32	SEC_PRES_HI	Secondary side pressurised			
					33	SEC_TEMP_HI	Clean steam temperature hot			
					62	WASTE_TEMP_ HI	Waste steam temperature hot			
					64	WASTE_TEMP_ HI	Water in temperature hot			
						Operator error	г	Replace cable		
CA11	Conductivity sensor	Analogue input	1	1	F	Refer to technical docu	mentation	Replace sensor		
					F	tefer to technical docu	mentation	Replace controller		
								Operator error	r	Replace cable
CA11	Conductivity sensor	Analogue input	1	1	F	tefer to technical docu	mentation	Replace sensor		
					F	tefer to technical docu	mentation	Replace controller		

Alarm		Alorm		Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
7	COND_TEMP_HI	Condensate temperature hot	Temperature exceeds 40°C / 104°F	-	High condensate temperature alarm	System isolation not complete	
						Wire removed from sensor	
9	FA01_ANLG_ ALA_OPEN	Feedwater flow rate Analog input	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	-
	/_/__\	alarm circuit open			, caago	BC3250 controller failure	
		Feedwater flow				Wire pinched or kinked	
10	FA01_ANLG_ ALA_SHRT	rate temperature Analog input alarm	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		short circuit				BC3250 controller failure	
11	FEED_PRES_HI	Feedwater	Pressure exceeds 0.1 bar g/ 1.45	_	Warning displayed	Service sequence	
	TEED_FRES_III	pressurised psig		-	Emergency stop	Service sequence	
12	FEED_TEMP_HI	Feedwater	Temperature exceeds 40°C /	_	Warning displayed	Service sequence	
		temperature hot	1040F		Emergency stop	00.1100.00400.100	
		Level sensor			Emergency stop	Wire removed from sensor	
13	LA11_ANLG_ ALA_OPEN	analogue input alarm circuit open	Cables removed from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		diami on out open			readings	BC3250 controller failure	
		Level sensor			Emergency stop	Wire pinched or kinked	
14	LA11_ANLG_ ALA_SHRT	analogue input	Pinched cable from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		alami short circuit			readings	BC3250 controller failure	
		Pressure sensor			Emergency stop	Wire removed from sensor	
16	PA01_ANLG_ ALA_OPEN	analogue input alarm circuit open	Cables removed from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		alaim circuit open			readings	BC3250 controller failure	
		Pressure sensor			Emergencey stop	Wire pinched or kinked	
17	PA01_ANLG_ ALA_SHRT		Pinched cable from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		aidini silori circuit			readings	BC3250 controller failure	

Component						Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
TA41	Temperature sensor	Analogue input	4	1	Operator error			Close isolation valve VM51
						Operator error		Replace cable
FA01	Flowmeter	Analogue input	0	1	R	Refer to technical docu	mentation	Replace sensor
		·			R	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
FA01	Flowmeter	Analogue input	0	1	R	Refer to technical docu	mentation	Replace sensor
		·			R	Refer to technical docu	mentation	Replace controller
PA01	Pressure sensor	Analogue input	0	1	Ins	sufficent isolation durin	g servicing	Work and check isolation valves
TA01	Temperature sensor	Analogue input	0	1	Ins	sufficent isolation durin	g servicing	Work and check isolation valves
						Operator error		Replace cable
LA11	Level sensor	Analogue input	1	1	R	Refer to technical docu	mentation	Replace sensor
		·			R	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
LA11	Level sensor	Analogue input	1	1	R	Refer to technical docu	mentation	Replace sensor
					R	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
PA01	Pressure sensor	Analogue input	0	1	Refer to technical documentation		mentation	Replace sensor
					Refer to technical documentation		mentation	Replace controller
					Operator error		Replace cable	
PA01	Pressure sensor	Analogue input	0	1	Refer to technical documentation		mentation	Replace sensor
					R	Refer to technical docu	mentation	Replace controller

				Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
		Pressure sensor			Emergency stop	Wire removed from sensor	
18	PA21_ANLG_ ALA_OPEN	analogue input alarm circuit open	Cables removed from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		aiaiiii circuit opeii			readings	BC3250 controller failure	
		Pressure sensor			Emergency stop	Wire pinched or kinked	
19	PA21_ANLG_ ALA_SHRT	analogue input	Pinched cable from sensor	Ceased production of clean steam	displayed on HMI/ Flashing conductivity	Sensor failure	
		alariii Short Circuit			readings	BC3250 controller failure	
		Supply steam in				Wire removed from sensor	
20	PA31_ANLG_ ALA_OPEN	pressure Analog input alarm circuit	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		open			-	BC3250 controller failure	
		Supply steam in				Wire pinched or kinked	
21	PA31_ANLG_ ALA_SHRT	pressure Analog input alarm short	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		circuit				BC3250 controller failure	
22	PRI_BAND_HI_ ALARM	Primary band HIGH alarm	-	Emergencey stop sequence - Ceased production of clean steam	Emergency stop displayed on HMI	Reduced primary pressure	
23	PRI_BAND_ LOW_ALARM	Primary band LOW alarm	Control valve failed closed	Emergencey stop sequence - Ceased production of clean steam	Emergency stop displayed on HMI	Customer steam supply	
24	PRI_CAP_ ALARM	Primary control capacity alarm	Valve over 99% open	Target clean steam pressure not achieved	Alarm displayed on HMI	Steam demand exceeds CSG capacity.	
25	PRI_PRES_HI	Primary side pressurised	Pressure exceeds 0.1 bar g/ 1.45 psig		Emergency stop displayed on HMI	Service sequence	
26	PRI_PRES_LOW	Primary pressure low alarm	Valve 100% open	Emergencey stop sequence - Ceased production of clean steam	Emergency stop displayed on HMI	Primary pressure PA31 lower than setpoint for clean steam pressure	
27	PRI_TEMP_HI	Primary side temperature hot	Temperature exceeds 40°C / 104°F	-	-	-	
28	SEC_BAND_HI_ ALARM	Secondary band HIGH alarm	-	-	Alarm displayed on HMI	Leaking within valve	
	ALANW	ALARM HIGH alaim				PID Settings	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
						Operator erro	г	Replace cable
PA21	Pressure sensor	Analogue input	2	1	F	Refer to technical docu	mentation	Replace sensor
		·			F	Refer to technical docu	mentation	Replace controller
						Operator erro	r	Replace cable
PA21	Pressure sensor	Analogue input	2	1	F	Refer to technical docu	mentation	Replace sensor
		'			F	Refer to technical docu	mentation	Replace controller
						Operator erro	r	Replace cable
PA31	Pressure sensor	Analogue input	3	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
						Operator erro	r	Replace cable
PA31	Pressure sensor	Analogue input	3	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
								Re-tune system
-	-	-	-	-		Setpoint not achie	eved	Leaking control valve
						Codensate block	age	Tune PID
-	-	-	-	-	Insuffiecr	nt customer steam sup steam	oly/ Qaulity of inlet	Fix Inlet steam supply
-	-	-	-	-		Insufficient capa	city	Review IMI to check capacities
PA31	Pressure sensor	Analogue input	3	1		Incorrectly isolated	valves	Check isolation valves
PA31	Pressure sensor	-	-	-	Insufficient customer steam suppy		Increase supply of inlet steam	
TA31	Temperature sensor	Analogue input	3	1	-		-	
VA01	Water control valve	Analogue input	0	1	Water control valve stuck open		Inspect water control valve to identify cause	
						Poor PID Settin	gs	Adjust PID settings

Alama		Alous		Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
			No noise/ pump		Water pump failure	Water supply not sufficent	
			not spinning		alarm	Air lock in water pump	
						Power loss to pump	
						Pump mechanical/ electrical failure	
			Valve closed when not instructed		Water level low alarm Valve feedback alarm	For more information	
			Reduced water level on visual boiler sight glass		(OPT)	see alarm 60	
29	SEC_BAND_ LOW_ALARM		Boiler water being dumped to drain, potential for flash steam	-	Water level low alarm Valve feedback alarm (OPT)	Valve failure	
			Excess Steam coming from drain Water level indicator low Sound from valve	Potential reduced CSG capacity More water consumption	-	Debris/ Wear	
						TDS settings too Low	
			Possible reduced pressure on pressure dial	-	-	Inlet water supply	
30	SEC_CAP_ ALARM	Secondary control capacity alarm	Valve over 99% open	Target clean steam pressure not achieved	Alarm on HMI	Steam demand exceeds CSG capacity	
31	SEC_LVL_LOW	Secondary side boiler water level low	Level indicator low	Emergencey stop sequence - Ceased production of clean steam	Low water level alarm displayed, Emergency stop displayed on HMI	Water level lower than setpoint	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
MB01	_	Analogue				-		Check water supply (Pressure and ensure no debris - Check strainers/ Filters)
MD01	Pump	output Digital input	0	1		-		Check air bleed
						-		Check power status
						Pump failure		Refer to pump IMI
VB01	Supply water control valve	Analogue output	0	1	For more information see Alarm 60			For more Information see alarm 60
VE11	Drain valve	Digital output	1	1		Visual inspection	on	Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
			1	2		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
VE12	TDS control valve	Digital output				Debris in pipelir	ne	Check strainer screen on water inlet. Check for debris origin.
					TDS valve stuck open		pen	Visit TDS Blowdown section in IMI for details. Check input water conductivity.
								Chook inlat water
-	-	-	-	-	Inlet water supply failure		Check inlet water supply for any blockages	
-	-	-	-	-	Insufficient capacity		Review IMI to check capacities	
-	-	-	-	-				

				Identfier					
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault			
32	SEC_PRES_HI	Secondary side pressurised	Pressure exceeds 0.1 bar g/ 1.45 psig	-	Emergency Stop displayed on HMI	Service sequence			
33	SEC_TEMP_HI	Clean steam temperature hot	Temperature exceeds 40°C / 104°F	-	-	Temperature exceeds 400C / 1040F			
		Feedwater				Wire removed from sensor			
34	TA01_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure			
		circuit open				BC3250 controller failure			
		Feedwater				Wire pinched or kinked			
35	TA01_ANLG_ ALA_SHRT	temperature Analog input alarm	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure			
		short circuit				BC3250 controller failure			
		Panel temperature		Emergencey stop	Emergency Stop	Wire removed from sensor			
36	TA0X_ANLG_ ALA_OPEN	analogue input alarm circuit open	Cables removed from sensor	sequence - Ceased production of clean	displayed on HMI/ Flashing conductivity	Sensor failure			
		alami circuit open		steam	readings	BC3250 controller failure			
		Panel temperature		Emergencey stop	Emergencey Stop	Wire pinched or kinked			
37	TA0X_ANLG_ ALA_SHRT	analogue input	Pinched cable from sensor	sequence - Ceased production of clean	displayed on HMI/ Flashing conductivity	Sensor failure			
		alarm short circuit		steam	readings	BC3250 controller failure			
38	TA0X_HIGH_ ALARM	Panel temperature limit alarm		Emergencey stop sequence - Ceased production of clean steam	Emergency stop displayed with high panel temperature alarm	High panel temperature			
		Water in				Wire removed from sensor			
39	TA11_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure			
		circuit open				BC3250 controller failure			
		Water in				Wire pinched or kinked			
40	TA11_ANLG_ ALA_SHRT	temperature Analog input alarm	Pinched cable from sensor		Flashing conductivity readings	Sensor failure			
				short circuit			, , ,	BC3250 controller failure	

Component					Cause			
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
PA21	Pressure sensor	Analogue input	2	1	Isolation valves in service sequence		e sequence	Check isolation valves
TA21	Temperature sensor	Analogue input	2	1		-		-
						Operator error		Replace cable
TA01	Temperature sensor	Analogue input	0	1	R	lefer to technical docu	mentation	Replace sensor
		·			R	tefer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA01	Temperature sensor	Analogue input	0	1	R	tefer to technical docu	mentation	Replace sensor
		'			R	lefer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TAX1	Temperature of panel	Analogue input	0	1	R	Refer to technical docu	mentation	Replace sensor
	·	·			R	tefer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TAX1	Temperature of panel	Analogue input	0	1	R	Refer to technical docu	mentation	Replace sensor
					R	Refer to technical docu	mentation	Replace controller
TAX1	Temperature of panel	Analogue Input	X	1		High ambient tempe	rature	Reduce enviroment temperature
						Operator error		Replace cable
TA11	Temperature sensor	Analogue input	1	1	R	lefer to technical docu	mentation	Replace sensor
					Refer to technical documentation		mentation	Replace controller
					Operator error			Replace cable
TA11			1	Refer to technical documentation		mentation	Replace sensor	
					R	lefer to technical docu	mentation	Replace controller

51

IM-P664-03 TES Issue 5

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
		Clean steam		Emergencey stop	Emergency Stop	Wire removed from sensor	
41	TA21_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	sequence - Ceased production of clean	displayed on HMI/ Flashing conductivity	Sensor failure	
		circuit open		steam	readings	BC3250 controller failure	
		Clean steam		Emergencey stop	Emergency Stop	Wire pinched or kinked	
42	TA21_ANLG_ ALA_SHRT	temperature Analog input alarm	Pinched cable from sensor	sequence - Ceased production of clean	displayed on HMI/ Flashing conductivity	Sensor failure	
	_	short circuit		steam	readings	BC3250 controller failure	
		Supply steam				Wire removed from sensor	
43	TA31_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		circuit open				BC3250 controller failure	
		Supply steam				Wire pinched or kinked	
44	TA31_ANLG_ ALA_SHRT	temperature Analog input alarm	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		short circuit			-	BC3250 controller failure	
		Supply waste				Wire removed from sensor	
45	TA41_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		circuit open				BC3250 controller failure	
		Supply waste				Wire pinched or kinked	
46	TA41_ANLG_ ALA_SHRT	temperature Analog input alarm	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		short circuit				BC3250 controller failure	
		Condensate out				Wire removed from sensor	
47	TA51_ANLG_ ALA_OPEN	temperature Analog input alarm	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		circuit open			, ,	BC3250 controller failure	
		Condensate out				Wire pinched or kinked	
48	TA51_ANLG_ ALA_SHRT	ANLG_ temperature	Pinched cable from sensor	_	Flashing conductivity readings	Sensor failure	
	ALA_SHRT	ALA_SHRT Analog input alarm short circuit				BC3250 controller failure	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
						Operator error		Replace cable
TA21	Temperature sensor	Analogue input	2	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA21	Temperature sensor	Analogue input	2	1	F	Refer to technical docu	mentation	Replace sensor
		·			F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA31	Temperature sensor	Analogue input	3	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA31	Temperature sensor	Analogue input	3	1	F	Refer to technical documentation		Replace sensor
		·			F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA41	Temperature sensor	Analogue input	4	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA41	Temperature sensor	Analogue input	4	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA51	Temperature sensor	Analogue input	5	1	Refer to technical documentation		mentation	Replace sensor
 					Refer to technical documentation		mentation	Replace controller
					Operator error		Replace cable	
TA51	Temperature sensor	Analogue input	5	1	F	Refer to technical docu	mentation	Replace sensor
					F	Refer to technical docu	mentation	Replace controller

Alama		Alaum		Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
		Drain temperature				Wire removed from sensor	
49	TA52_ANLG_ ALA_OPEN	analogue input	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		alarm circuit open			·	BC3250 controller failure	
		Drain temperature				Wire pinched or kinked	
50	TA52_ANLG_ ALA_SHRT	analogue input	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		alami short circuit				BC3250 controller failure	
			-	High levels of		TDS set point exceeded	
51	TDS_HI	TDS failure	-	conductivity	TDS alarm displayed	Invalid time duration entry	
52	TDS_HYS_FAIL	TDS hysteresis fault	Continous Blowdown	-	TDS hystersis alarm displayed	TDS hystersis setpoint not achieved	
54	TRAP_FAIL_ CLOSE	Trap failure close	Cold before trap, steam collapse/ waterhammer on start up (noise at primary inlet)	Startup not acievced	No alarm	No steam in heat excahnger to heat water	
			-	Rapid loss of clean steam pressure	Trap Failed Closed Alarm on HMI	Rapid build-up of condensate	
55	TRAP_FAIL_ OPEN	Trap Failure Open	High temperature / WaterHammer/ Pressurised Condensate return system	Increase in Supply water temperature and pressure	Trap Fail open alarm displayed on HMI	Condensate travelling uncontrolled through trap	
			Increase in steam consumption	Pressurised condensate return system		ар	
		Water level control				Wire removed from sensor	
56	VA01_ANLG_ ALA_OPEN	I_ANLG_ valve feedback C	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
	ALA_OPLIN F					BC3250 controller failure	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
						Operator error		Replace cable
TA52	Temperature sensor	Analogue input	5	2	R	Refer to technical docu	mentation	Replace sensor
					R	Refer to technical docu	mentation	Replace controller
						Operator error		Replace cable
TA52	Temperature sensor	Analogue input	5	2	R	Refer to technical docu	mentation	Replace sensor
					R	Refer to technical docu	mentation	Replace controller
					TDS set point exceeded		eded	Take action to reduce TDS, if necessary
VE12	TDS valve	Digital output	1	2	Input error on HMI		MI	adjust setpoint Visit TDS blowdown section in IMI for details
					Input error on HMI		MI	Adjust setpoint whilst refering to IMI
VE12	TDS valve	Digital output	1	2		Partially blocked valve		Inspect blocked valve
		, ,				Restrictions in blow	down	Inspect any blockages in blowdown
QU51	Steam trap	Uncontrolled	5	1	Blocka	ige in condensate line	during start-up	Identify blockages
					Blockaç	ge in condensate line o	luring operation	
QU51	Steam trap	Uncontrolled	5	1	Wear of seat Debris in pipeline		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	
					Operator error			Replace cable
VA01	Feedwater control valve	Analogue input	0	1	R	Refer to technical docu	mentation	Replace sensor
					Refer to technical documentation		mentation	Replace controller

Alama		Aleum		Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
		Water level control				Wire pinched or kinked	
57	VA01_ANLG_ ALA_SHRT	valve feedback Analog input alarm	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
		short circuit			·	BC3250 controller failure	
		Supply steam in control valve				Wire removed from sensor	
58	VA31_ANLG_ ALA_OPEN	feedback Analog	Cables removed from sensor	-	Flashing conductivity readings	Sensor failure	
		input alarm circuit open				BC3250 controller failure	
		Supply steam in control valve				Wire pinched or kinked	
59	VA31_ANLG_ ALA_SHRT	feedback Analog	Pinched cable from sensor	-	Flashing conductivity readings	Sensor failure	
	_	input alarm short circuit			Ů	BC3250 controller failure	
			Valve not open when instructed.	-	Valve feedback alarm (OPT), Water level failure alarm, Water level high alarm	Leaking seat/ plug	
						Positioner failure	
60	VB01_FBK	Feedwater control feedback error				Positioner calibration faulty	
	V V V V V V V V V V V V V V V V V V V					Actuator failure	
			Valve closed		Water Level Low alarm.	Mechanically failed shut	
			when ot instructed.		Valve feedback alarm (OPT)	Positioner failure	
			manucleu.	Potential reduced CSG capacity. More water consumption	(OFT)	Actuator failure	
				·	Valve feedback alarm (OPT), Water level	Valve failure	
			Gauling Valve		failure alarm, Water level high alarm	Positioner failure	

		Component				Cause								
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action						
						Operator error	-	Replace cable						
VA01	Feedwater control valve	Analogue input	0	1	R	Refer to technical documentation		Replace sensor						
					R	Refer to technical docu	mentation	Replace controller						
						Operator error		Replace cable						
VA31	Plant steam control valve	Analogue input	3	1	R	Refer to technical docu	mentation	Replace sensor						
					R	Refer to technical docu	mentation	Replace controller						
						Operator error		Replace cable						
VA31	Plant steam control valve	Analogue input	3	1	R	Refer to technical docu	mentation	Replace sensor						
					R	Refer to technical docu	mentation	Replace controller						
												Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
								Debris in pipelir	ne	Check strainer screen on water inlet. Check for debris origin.				
					Misi	match between positio	ner and PLC							
VA01	Feedwater control valve	Analogue input	0	1	Mismate	ch between positioner indicator position an								
					Mismate	ch between positioner indicator position an		Identify failed part						
						Gailing of sten	1	with tag and schematic in IMI. Consult individual						
					Misi	match between positio	ner and PLC	product IMI. Replace or repair						
				Mismate	ch between positioner indicator position an		failed part.							
				-		Gailing/ Wear of s	tem							
					Misi	match between positio	ner and PLC							

				Identfier			
Alarm number	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
			Valve not open when instructed.	-	Valve feedback alarm (OPT), Water level failure alarm, Water level high alarm	Leaking seat/ plug	
						Positioner failure	
61	VB31_FBK	Steam in control feedback error				Positioner calibration faulty	
						Actuator failure	
			Valve closed		Water Level Low alarm.	Mechanically failed shut	
			when not instructed		Valve feedback alarm (OPT)	Positioner failure	
			instructed	Potential reduced CSG capacity. More water consumption	(OF1)	Actuator failure	
					Valve feedback alarm (OPT), Water level	Valve failure	
			Gauling valve		failure alarm, Water level high alarm	Positioner failure	
62	WASTE_TEMP_ HI	Waste steam temperature hot	Temperature exceeds 40°C / 104°F	Service sequence halted	-	Service sequence	
						Power loss to pump	
63	WATER_PUMP_ FAIL		No Sound from water pump	Reduced output of clean steam	Alarm displayed on HMI	Water supply not suffiecnt	
						Air lock in water pump	
						Pump mechanical/ electrical failure	
64	WATER_TEMP_ HI	Water in temperature hot	Temperature exceeds 400C / 1040F	Service sequence halted	Alarm displayed on HMI	Service sequence	

			Component			Cause				
	TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action	
						Wear of seat			Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	
						Debris in pipeline			Check strainer screen on water inlet. Check for debris origin.	
						Misr	match between positio	ner and PLC		
	VA01	Feedwater control valve	Analogue input	0	1	Mismatch between positioner a indicator position and mismatch between positioner a indicator position and				
									Identify failed part	
							Gailing of sten	1	with tag and schematic in IMI. Consult individual	
						Misr	natch between positio	ner and PLC	product IMI. Replace or repair	
						Mismato	ch between positioner indicator position an		failed part.	
						Gailing/ Wear of stem				
	TA41	Temperature sensor	Analogue input	4	1	Ins	ufficent isolation durir	ng servicing	Work and check isolation valves	
							-		Check power status	
	MB01 MD01	Pump	Analogue output Digital	0	1	Insufficent water head pressure		pressure	Check water supply (Ensure no debris, checking strainers and filters along with the pressure)	
			input			Insufficent bleeding -		ing	Check air bleed	
								-		
	TA01	Temperature sensor	Analogue input	0	1	Ins	ufficent isolation durir	ng servicing	Work and check isolation valves	

59

IM-P664-03 TES Issue 5

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
66	VALVE_CAP_ FAIL	Electric valve fault	-	Emergency Stop Sequence- Ceased production of clean steam	Emergency stop displayed on HMI	Internal fault with electric actuator	
67	INITIALISE	PLC Start-up from power cycle	- No Clean Steam Produced / CSG not operational No display on HMI or partial display		Faulty PLC		
	MATER IVI	Water level high	Water Level	Inaccurte control of water control valve	Alarm displayed on	Water level exceeds	
68	WATER_LVL_HI	alarm	exceeds 90%	Water control valve failed open	Н Н Н Н Н Н Н Н Н Н Н Н Н Н Н Н Н Н Н	90%	
69	WATER_LVL_ ALARM	Water level failure	TDS Valve opening outside of TDS control	-	Alarm displayed on HMI	Repeated high water level alarm on HMI	
70	AIR_PRESS_ FAIL	Air supply pressure fail	No valve movement	-	Alarm displayed on HMI	Insufficent Compressed Air	
71	VE31_FAIL_ OPEN	Plant isolation valve fail open	-	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
			Actuator Indicator in incorrect Position			Actuator failure	
72	CLOSE Valve fail closed wh		Indicator displays closed when instructed to open	CSG does not start/ Loss of clean steam supply	Alarm displayed on HMI	Valve does not leave closed position when instructed	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
VA11 VA31	Electric Actuator	Digital input	1 3	1	Component fault			Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
-	-	-	-	-		PLC failure		Contact SXS engineer
V4.04	Feedwater	Analogue	0		65	WATER_VLV_ FAIL	Water control valve failure	Inaccurte control of water control valve
VA01	control valve	input	0	1	65	WATER_VLV_ FAIL	Water control valve failure	Water control valve failed open
-	-	-	-	-	See Alarm 68 for more information			See Alarm 65 for more Information
PDX1	Air supply	Digital input	0	1		-		Restore air supply
VE31	Steam isolation valve	Digital output	3	1		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
					Debris in pipeline		ne	Check strainer screen on water inlet. Check for debris origin.
VE31	Steam isolation valve	Digital output	3	1	Insufficent customer air supply			Check customers air supply line
VE31	Steam isolation valve	Digital output	3	1	Mismatch between positioner and actual stem indicator position and PLC			Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
73	VE31_FAIL_ STICK	Plant isolation valve fail stuck	Actuator indicator shows neither on/ off	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
						Actuator failure	
74	VE31_FAIL_ SPEED	Inlet Plant valve fail opening speed	Possible waterhammer in primary side	-	Alarm displayed on HMI	Unrestricted exhaust flow from actuator	
75	VE21_FAIL_ OPEN	Outlet isolation valve fail open	-	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
			Actuator Indicator in incorrect position			Actuator failure	
76	VE21_FAIL_ CLOSE	Outlet isolation valve fail closed	Indicator displays closed when instructed to open	CSG does not start/ Loss of clean steam supply	Alarm displayed on HMI	Valve does not leave closed position when instructed	

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
VE31	/E31 Steam isolation valve	Digital output	3	1		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
VEST		Digital output	3		Debris in pipeline			Check strainer screen on water inlet. Check for debris origin.
						Insufficent customer a	ir supply	Check customers air supply line
VE31	Steam isolation valve	Digital output	3	1	E	Exhaust restrictor set in	ncorrectly	Reset/ Replace exhaust restrictor
						Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
VE21	Steam isolation valve	Digital output	2	1		Debris in pipelii	ne	Check strainer screen on water inlet. Check for debris origin.
					Insufficent customer air supply		Check customers air supply line	
VE21	Isolation valve	Digital output	2	1	Mismatch between positioner and actual stem indicator position and PLC		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
77	VE21_FAIL_ STICK	Outlet isolation valve fail stuck	Actuator indicator shows neither on/ off	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
						Actuator failure	
78	VE21_FAIL_ SPEED	Outlet isolation valve fail opening speed	Waterhammer	Sudden/ rapid pressure loss Risk of carryover	Alarm displayed on HMI	Unrestricted exhaust flow from actuator	
79	WATER_ SUPPLY_FAIL	Customer water supply failure	Lack of supply water pressure	Emergency Stop Sequence- Ceased production of clean steam	Emergency stop displayed on HMI	Water supply pressure does not meet requirements for clean steam generator	
80	VE32_FAIL_ OPEN	Test air isolation fail open	-	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
			Actuator Indicator in incorrect Position			Actuator failure	
81	VE32_FAIL_ Test air isolation closed when instructed to open		CSG does not start/ Loss of clean steam supply	Alarm displayed on HMI	Valve does not leave closed position when instructed		

		Component				Cause		
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
VE21	isolation valve	Digital output	2	1		Wear of seat Debris in pipeline		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
V L Z I	isolation valve	Digital output	2	'				Check strainer screen on water inlet. Check for debris origin.
						Insufficent customer a	ir supply	Check customers air supply line
VE21	isolation valve	Digital output	2	1	E	Exhaust restrictor set incorrectly		Reset/ Replace exhaust restrictor
PA01	Pressure sensor	Analogue input	0	1	Customer v	Customer water supply pressure < setpoint for water pressure		Check customer water supply
VE32	Steam isolation valve	Digital output	3	1		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
					Debris in pipeline		ne	Check strainer screen on water inlet. Check for debris origin.
VE32	Steam isolation valve	Digital output	3	1	Insufficent customer air supply		ir supply	Check customers air supply line
VE32	Steam isolation valve	Digital output	3	1	Mismatch between positioner and actual stem indicator position and PLC		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
82	VE32_FAIL_ STICK	Test air isolation fail stuck Start-up/ Shutdown sequence would halt Start-up/ Shutdown sequence would halt HMI		Leaking seat			
						Actuator failure	
83	VE32_FAIL_ SPEED	Test air isolation fail opening speed	Possible waterhammer in primary side	-	Alarm displayed on HMI	Unrestricted exhaust flow from actuator	
84	VE51_FAIL_ OPEN	Condensate isolation valve fail open	-	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
			Actuator Indicator in incorrect position			Actuator failure	
85	VE51_FAIL_ CLOSE	Condensate isolation valve fail close	Indicator displays closed when instructed to open	CSG does not start/ Loss of clean steam supply	Alarm displayed on HMI	Valve does not leave closed position when instructed	

	Component						Cause		
	TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
	VE32	Steam isolation valve	Digital output	3	3 1		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
	V LOZ		Digital output	3		Debris in pipeline			Check strainer screen on water inlet. Check for debris origin.
						Insufficent customer air supply			Check customers air supply line
	VE51	Steam isolation valve	Digital output	3	1	Exhaust restrictor set incorrectly		Reset/ Replace exhaust restrictor	
	VE51 is	Steam isolation valve	e Digital output				Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
				2	1	Debris in pipeline		Check strainer screen on water inlet. Check for debris origin.	
						Insufficent customer air supply			Check customers air supply line
	VE51	Isolation valve	Digital output	2	1	Mismatch between positioner and actual stem indicator position and PLC		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	

CSG-FBHP Clean steam generation system for Food & Beverage

Alama		Alama		Identfier			
Alarm	Alarm PLC tag	Alarm description	Physical	Process	System	Fault	
86	VE51_FAIL_ STICK	Condensate isolation valve fail stuck	Actuator indicator shows neither on/ off	Start-up/ Shutdown sequence would halt	Alarm displayed on HMI	Leaking seat	
				Sudden/ rapid Alarm displayed on Unrestri		Actuator failure	
87	VE51_FAIL_ SPEED	Condensate isolation valve fail opening speed	Waterhammer	pressure loss Risk of		Unrestricted exhaust flow from actuator	
	TEMP_LIM	Saturated pressure temperature limit	-	Emergency Stop Sequence- Ceased production of clean steam	Emergency stop displayed on HMI	Clean steam thermistat tripped	
88						Low water level limit exceeded	
89	HMI_SYNC_ ALARM	HMI Communications Fault	HMI Unresponsive	Optional: Emergency Stop Sequence- Ceased production of clean steam	HMI connection banner	Communication between PLC and HMI has been lost	
			Leak pipe joints			Leak in pipe joints	
90	ALA_TEST_ LEAK_NEG	Integrity test leak alarm	Leak in steam control valve	Ceased production of clean steam	Alarm displayed on HMI	Leak in steam control valve	
			Leaks in Integrity test valves			Leak in isolation valves	
91	ALA_TEST_ POS_MAX	Integrity test count alarm	-	Ceased production of clean steam	Alarm displayed on HMI	Maximum number of integrity tests reached	

		Component			Cause			
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
VE51	isolation valve	Digital output	2	1		Wear of seat		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
V 231	iosianon vario	Digital output	-	·	Debris in pipeline		ne	Check strainer screen on water inlet. Check for debris origin.
					Insufficent customer air supply			Check customers air supply line
VE51	isolation valve	Digital output	2	1	Exhaust restrictor set incorrectly		Reset/ Replace exhaust restrictor	
TD21	Temperature switch	Digital input	2	1	Clean steam temperature exceeds set limit		Investigate clean steam temperture source	
					Clean steam temperature switch failure			Identify failed part
					Water level below allowanie limit Water low level switch failure		vanle limit	with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
LD11	Level switch	Digital input	1	1			n failure	Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
						HMI Failure		Replace HMI
-	HMI screeen	-	-	-	Connection fault with ethernet cable		Check ethernet ports for connection and communication lights	
 -	-	-	-	-		-		Inspect pipe joints
 VA31	Steam control valve	Anaolgue input	3	1	-		Inspect steam control valve	
-	-	-	-	-		-		Inspect isolation valves
-	-	-	-	-	Air pres customer de	sure rises during integ ecision before clean st begin	rity test requires eam production can	Use on-screen pop-up screen

Alarm		Alarm		Identfier			
number	Alarm PLC tag	description	Physical	Process	System	Fault	
92	DRAIN_TEMP_HI	Drain temperature hot	Temperature exceeds 40°C / 104°F	Service sequence halted	Alarm displayed on HMI	Service sequence	
93	ESTOP_PB	Emergency stop button pressed	E-stop button locked in	Ceased production of clean steam	Emergency stop displayed on HMI	-	
94	PRE_CYCLE_ LIMIT	Pre-heater thermal cycles limit	-	Possible stress cracks in pre-heater	Alarm displayed on HMI	-	
95	PRE_HP_TA11_ LOW	Preheater temperature low	Temperature falls below TA21 - 2.5°	Ceased production of clean steam	Alarm displayed on HMI	Preheater pressure too low	
96	PRE_HP_TA11_HI	Preheater temperature high	Temperature raises above TA21 + 2.5°	Ceased production of clean steam	Alarm displayed on HMI	Overpressure in the preheater	
		Prirmary band high alert				Failed open control valve	
97	PRI_BAND_HI_ ALERT		-	High clean stem pressure	Alert displayed on HMI	Leaking control valve	
						Leak in heat exchanger	
						PID settings	
	PRI_BAND_	Prirmary band low	Control valve	Low clean steam		Valve positioning incorrect	
98	LOW_ALERT	alert	closed for a given amount of time	pressure	Alert displayed on HMI	PID settings	
						Customer supply steam	
						Restricted condensate flow	
						Plant steam	
99	PRI_CAP_ALERT	Primary control capacity alert	Valve over 99% open for a given amount of time	-	Alert displayed on HMI	Capacity incorrect	
						Restricted condensate flow	

		Component						
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
TA52	Temperature sensor	Anaolgue input	5	2	Insufficent isolation during servicing			Work and check isolation valves
-	-	-	-	-	User operated		Release e-stop button and press reset button	
-	-	-	-	-		nber of allowable theri preheater has been ex		Replace Pre-heater
TA11 and TA21	Temperature Sensor	Analogue input	1 and 2			eheater HE02 for scale d also be triggered due		Reset VU33 and retune PID settings
TA11 and TA21	Temperature Sensor	Analogue input	1 and 2		Mal-adjusted VU33 or primary side overpressure or poor PID tuning		Perform inspection on VU33 and primary steam control valve	
					Se	ee alarm 71 for more ii	nformation	See Alarm 71 for more Information
						-		Identify leak in control valve
						-		Identify leak in heat exchanger
						Incorrect PID sett	ings	Adjust PID setting if necessary
VA31	Steam control valve	Analogue input	3	1	-		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.	
						Incorrect PID sett	ings	Adjust PID setting if necessary
-	-	-	-	-		-		Fix inlet steam supply
						Debris in pipelir	ne	Remove debris from pipeline
VA31	Plant steam control valve	Analogue input	3	1		Plant steam Insuff	icent	Fix Plant steam
						Capacity incorre	ect	See IMI for corrcet capacities.
-	-	-	-	-		Debris in pipelir	ne	Inspect pipeline and remove any debris

71

IM-P664-03 TES Issue 5

Alarm		Alarm		Identfier			
numb	Alarm PI (: tan	description	Physical	Process	System	Fault	
		PID settings		PID settings			
100	SEC_BAND_HI_ ALERT	Secondary band high alert	-	Possible carryover	Alert displayed on HMI	Leaking valve	
101	SEC_BAND_ LOW_ALERT	Secondary band low alert	-	-	Alert displyayed on HMI	Positioner failure	
						PID settings	
102	SEC_CAP_ ALERT	Secondary control capacity alert	-	-	Alert displayed on HMI	Insuffiecnt water supply	

Component					Cause			
TAG number	Item description	Control type	Zone	Instance	Alarm No	ALARM PLC TAG	ALARM DESCRIPTION	Action
						Inspect PID setti	ngs	Adjust PID settings if necessary
-	-	-	-	-		-		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
	-	-	-	-		-		Identify failed part with tag and schematic in IMI. Consult individual product IMI. Replace or repair failed part.
						Inspect PID setti	ngs	Adjust PID settings if necessary
-	-	-	-	-	Debris in pipeline		Remove any debris from pipeline.	

8. Maintenance

Before starting any maintenance operation, carefully read the general safety information in Section 1 of this document.



Before starting any installation or maintenance operation, make sure that power has been shut-off.

To carry out many maintenance procedures, the unit shall be isolated from the system. The unit can be re-inserted in the system only after completing all the procedures.

It is recommended that maintenance personnel carry out the shut-down and start-up procedures described in this manual.

After the maintenance activities is required a washing cycle with a CIP (cleaning in place), or other procedure required by the process/plant directives.

8.1 General information

The maintenance of single system components must be carried out as indicated in the individual installation and maintenance manuals (IM).

8.2 Inspection/Replacement of the pressure safety switch

The safety pressure switch acts as a fail-safe for Spirax Sarco Clean Steam Generators. The alarm and shut down for high pressure is set at a value lower than the set of the safety valve. If the pressure safety switch mounted on the tank is not functioning correctly and must be replaced, follow the procedures outlined below.

8.2.1 Disassembly of the pressure switch:

- Follow the shutdown procedure to take the unit off-line before attempting to replace the safety pressure switch.
- Turn off/disconnect all electric power before attempting any maintenance procedures.
- Check that primary steam, condensate return line, feedwater inlet, NCG vent and clean steam outlet are isolated; that both circuits (primary and secondary) are not pressurized; that the generator has been completely drained and all components and surfaces are cold.
- Carefully disconnect the wires leading from/to the control cabinet.
- Loosen the connections until the pressure probe can be removed.

8.2.2 Inspection of the pressure switch:

 Examine the probes for damage or incorrect positioning. For the exact procedure for examination, refer to the Spirax Sarco manual information included with the unit.

8.2.3 Re-assembly of the pressure switch:

- To install a new unit, follow recommendations contained in the manufacturer's documentation.
- After ensuring that the unit is correctly installed, tighten the fittings.
- Follow the start-up procedures to put the unit back on-line. Carefully check all connections for any sign of leakage.

8.3 Replacement of the Pressure Safety Valve (Generator)

The pressure safety valve acts as a fail-safe for Spirax Sarco Compact Steam Generators. The valve will open for high pressure to protect the system from explosion. If the pressure safety valve mounted on the pressure vessel is not functioning correctly and must be replaced, follow the procedures outlined below.

8.3.1 Disassembly of the safety valve:

- Follow the shutdown procedure to take the unit off-line before attempting to replace the safety pressure switch.
- Turn off/disconnect all electric power before attempting any maintenance procedures.
- Check that primary steam, condensate return line, feedwater inlet, NCG vent and clean steam outlet are isolated; that both circuits (primary and secondary) are not pressurized; that the generator has been completely drained and all components and surfaces are cold.
- After assuring that the pressure has been relieved from the tank, disconnect the vent line leading from the pressure relief valve to atmosphere (usually through the roof), and via a drip elbow, to drain.
- Carefully disconnect the pressure relief valve from between the generator vessel and feed tank.

8.3.2 Re-assembly of the pressure switch:

- Install the new valve. Follow recommendations contained in the manufacturer's documentation, local codes, or accepted contractor
 practices as to the use of joint compound or sealer at the connections.
- Reconnect the vent line leading from the pressure safety valve to atmosphere and, via drip elbow, to drain.
- Follow the start-up procedures to put the unit back on-line. Carefully check all connections for any sign of leakage.

8.4 Preheater replacement

The preheater will need replacing once it has met it's thermal cycling capacity. To replace the preheater:

8.4.1 Disassembly of the preheater heat exchanger

- Check that all inlets and outlets to the system (primary steam, condensate return, feedwater inlet and clean steam outlet) are isolated, that both circuits (primary and secondary) are not pressurised; that the process heat exchanger has been completely drained and all components and surfaces are cold
- Carefully disconnect the piping the preheater heat exchanger and inspect the gaskets for wear
- Once the connections have been disconnected, the heat exchanger can be removed

8.4.2 Re-assembly of the preheater heat exchanger

- Secure the new preheater heat exchanger in place, take care the ensure the orientation matches that as heat exchanger that was removed
- Fix the heat exchanger in place by connecting the pipework connections
- Thoroughly clean the mating surfaces
- Replace any worn gaskets and seals and reattach the piping to the preheater heat exchanger
- Carefully check all connections to detect any leaks during start-up

8.5 Spare parts

For recommended spare parts for commissioning or maintenance, please contact our Service Department.

8.6 Recommend inspectionThe following table indicate the suggested interval times for the inspection on the clean steam generator and of all the other components installed on the package.

Inspection	Refer to product IMI	Daily	Weekly	Quarter	
mapaction	Refer to product him	Daily	TTOERTY	Qualter	
Blowdown		•			
Control valve	•				
Water level**		•			
Pressure level**				•	
Level control	•				** To verify the
Inlet and outlet line				•	difference between the
Pneumatic connections				•	measure of the transmittal
Electrical connection				•	against the indicator
Primary and secondary side pressure		•			
Safety Valves	•				
Manual isolation valve			•		
Strainers				•	
Preheater pressure reducing valve	•			•	

8.7 Spirax Sarco Service maintenanceSpirax Sarco can provide on request of routine scheduled maintenance contract with the following steps. The maintenance contract usually includes two visits per year.


Maintenance Test	6 month visit	12 month visit	18 month visit	24 month visit
Visual inspection of control valves and actuators	•	•	•	•
Dismantle control valves, clean and visually inspect valve internals, replace valve stem seals		•		•
Check valve/actuator/positioners, zero and stroke, adjust if necessary	•		•	
Visual inspection of all wiring and terminations	•	•	•	•
Check all electrical connections for tightness	•	•	•	•
Ensure correct operation of pump (if present)		•		•
Pressure, temperature and level transmittal control		•		•
Functional inspection of safety components and PLC			•	•
Visual inspection of heat exchanger for external leakage	•	•	•	•
Preheater heat exchanger inspection				•
Check and clean all strainer screens, re-fit using new cap gaskets	•		•	
TDS test and probe check	•	•	•	•
TDS re-calibration		•		•
Fully functional test of the unit	•	•	•	•


spirax sarco IM-P664-03 TES Issue 5 77

9. Component map

The Components detailed below may not be fitted to all versions of the CSG-FBHP. Refer to section 9.2 for Component configuration lists. Optional items are designated with *.

9.1 System PandID

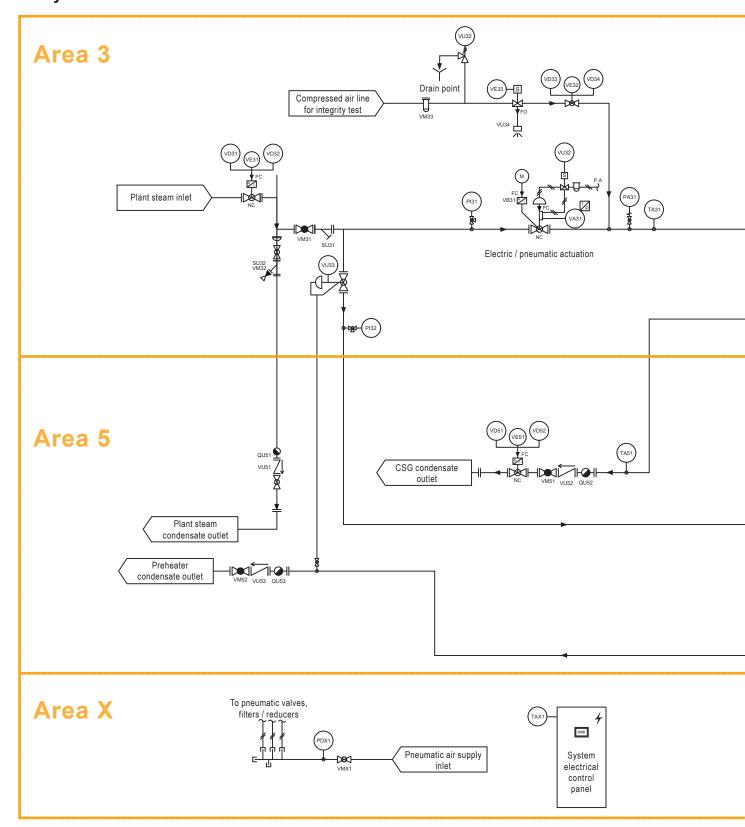

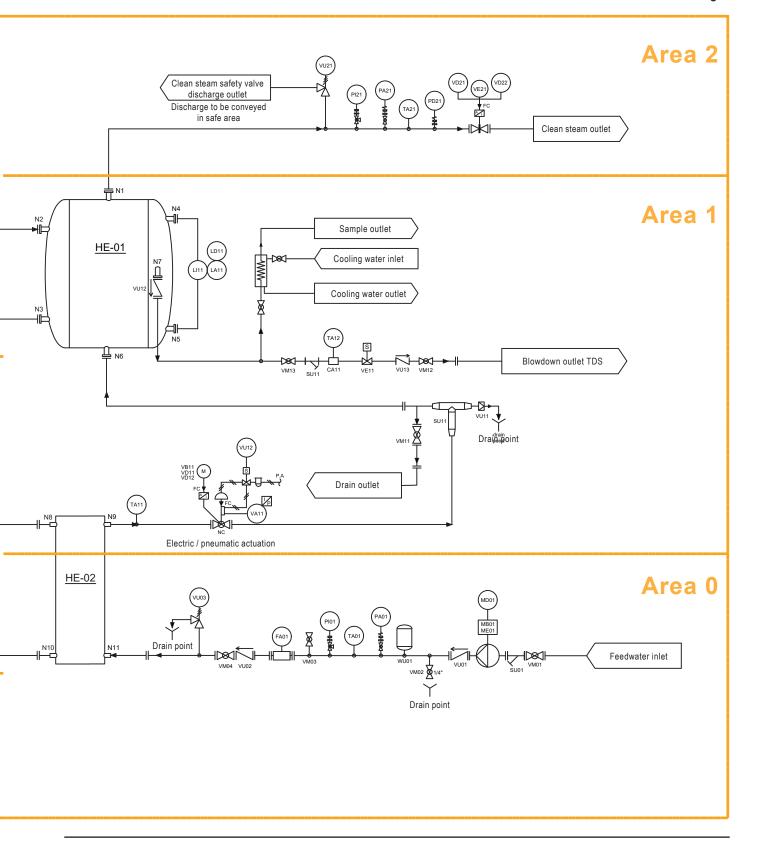

9.2 Component Configuration

The options available for the CSG-FBHP are listed in section 2.3. Many of the available options will utilise additional equipment fitted the system. The components specifically required for each option are listed below. Default items fitted as standard are identified with*

Plant steam inlet isolation valve

Manual valve*: VM31

Automated valve: VM31 replaced by VE31, VD31, and VD32

TDS control system

Timer control*: VE11

Pulsed and continuous hysteresis control: VE12 and CA11

Feedwater pressurisation system

None*

Integrated pump: MA01, MD01

Independent downstream plant protection

None*

Low level limit switch: LD11

Saturated temperature limit switch: TD21

Intelligent Diagnostics

None*

Integrity test: VM51 replace by VE51, VM11 replace by VE11, PA31, TA31, VE32, VE33

- Performance monitoring: TA01. TA21, TA31, TA51, TA52, FA01, PA31, PA01 and TA11

System diagnostics: VB01, VB31, PA31, TA51 and TA52

With pneumatic control or Integrity test: PDX1

- Without integrated pump: PA01

Clean steam outlet isolation valve

None*

Manual Valve: VM21

Automated valve: VE21, VD21 and VD22

9.3 Component naming convention

The naming convention for the system map do not correlate to the specific parts and part numbers. The tag names are specific to the CSG-FBHP system and are not tied to specific component models. To identify a particular component, reference the component tag number to the Bill Of Materials for the specific model of CSG-FBHP.

The tag numbers can be deciphered to aid identification and location of the component on the CSG-FBHP.



9.3.1 Component types

Opposite is a table of currently identified component types.

Letter	Component type
С	Conductivity
F	Flow sensor
Н	Heat exchanger (preheater, sample cooler, etc)
L	Level sensor
Р	Pressure sensor
Q	Trap (steam, air eliminator, etc)
s	Separator
Т	Temperature sensor
V	Valve (globe, ball, check, vacuum breaker, butterfly, etc)
w	Water vessel (pressure buffer, storage, etc)
Y	Strainer

9.3.2 Control/signal type

Opposite is a table of currently identified Control and Signal types. The direction of signals is always reference in relation to the PLC or process controller.

Letter	Control/Signal type
Α	Analogue input (signal)
В	Analogue output (control)
D	Digital input
E	Digital output
I	Indicator (non-electrical, dial, etc)
М	Manual control
Un-controlled (check valve, strainer, separator, etc)	

9.3.3 Zone allocation

Zones are used to segregate areas of the package into sub-areas based around state changes of the process of the package.

Numbering of the Zones begins with the inlet flow of the process fluid at Zone 0. When the process fluid undergoes a change or state change, the Zone number increases until it leaves the CSG-FBHP.

The inlet of the control fluid begins with the next available Zone number. At each state change of the control fluid, increase the Zone number until the control fluid leaves the package.

Components located externally to the steam system are always labelled as Zone X.

9.3.4 Incidence number


Where multiples of similar devices and parts occur in the same zone, incidence numbers are used to distinguish between them.

Starting points for incidence numbers always start from the component closest the entry of the Zone area.

e.g. On a condensate line, 2 manual valves are identified in Zone 5. The first of the manual valves to come into contact with the condensate as it passes through zone 5 will be given the Incidence number 1.

10. HMI map

The following map shows the screens available to all users. Some screens will require a security password to access. The minimum required level is highlighted with the Key shown opposite.

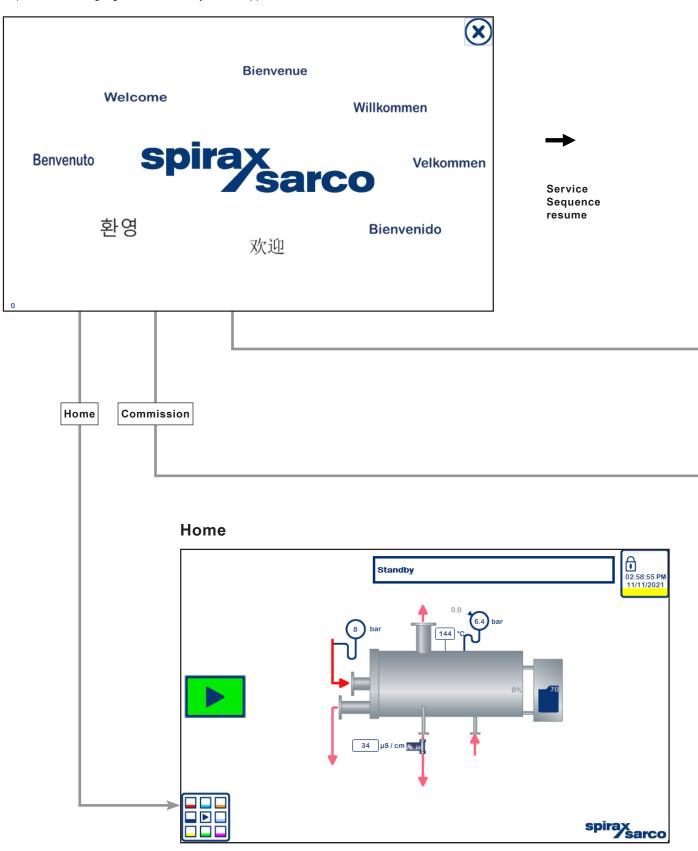

Level key









83

Pre-commission alarm

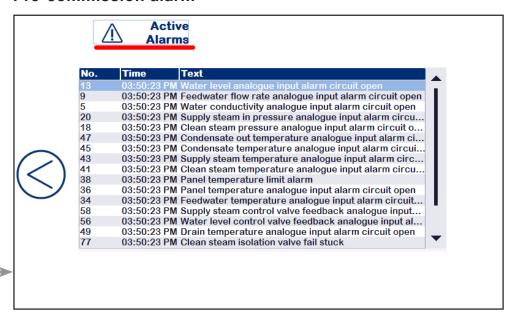


Commission

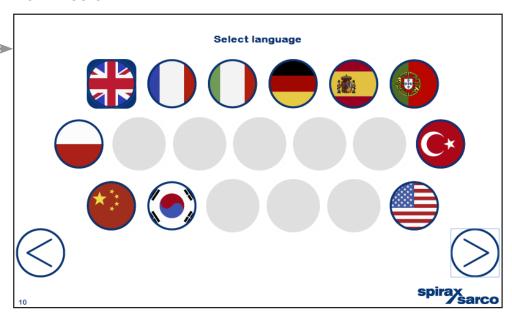



CSG-FBHP Clean steam generation system for Food & Beverage


10.1 Commissioning screens

The commissioning screens allow users to input the configuration of the CSG-FBHP into the control system using the model specific nomenclature. These are generated at the point of ordering and must be referenced to ensure correct operation of the CSG-FBHP.

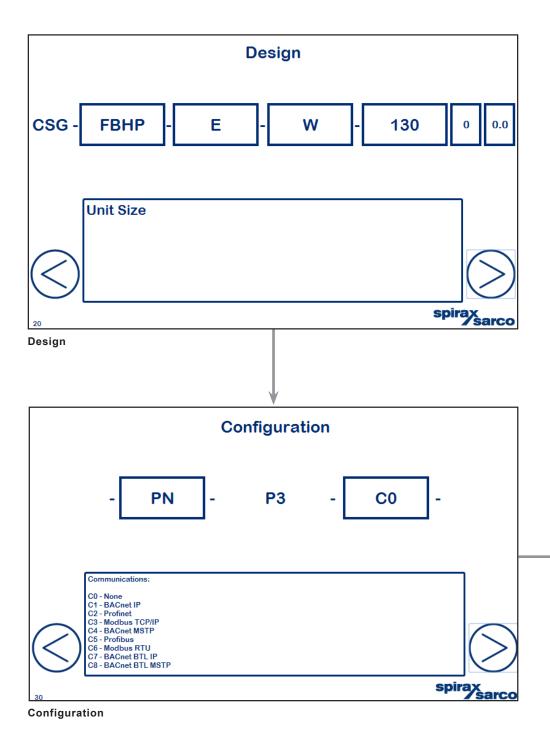

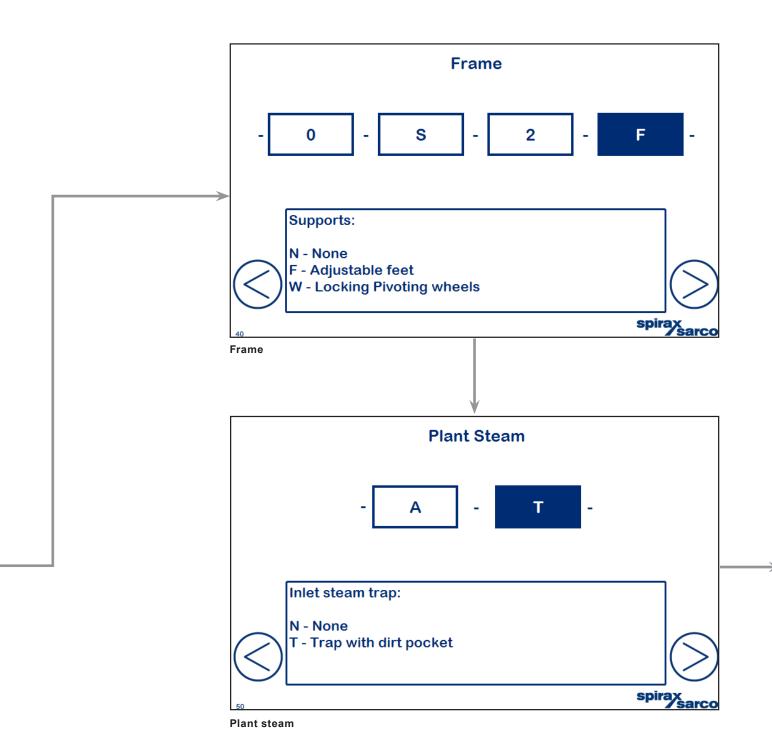

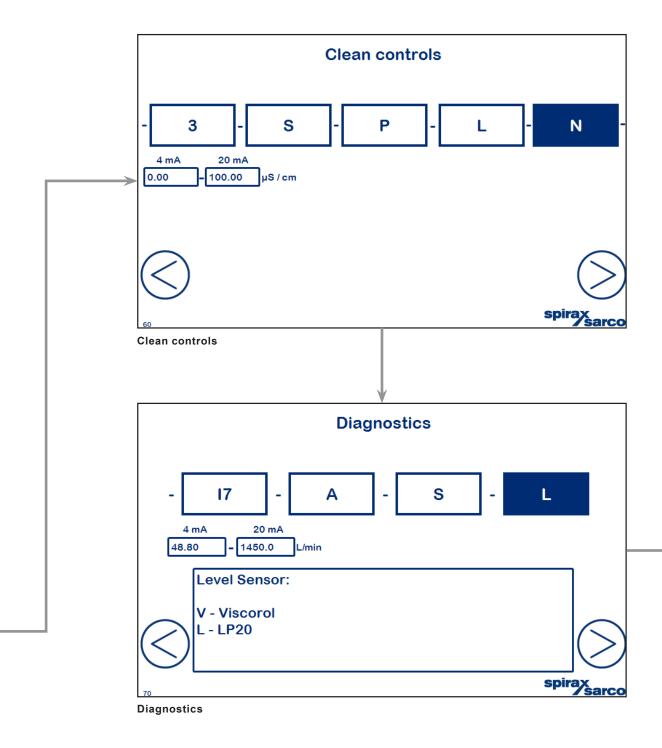

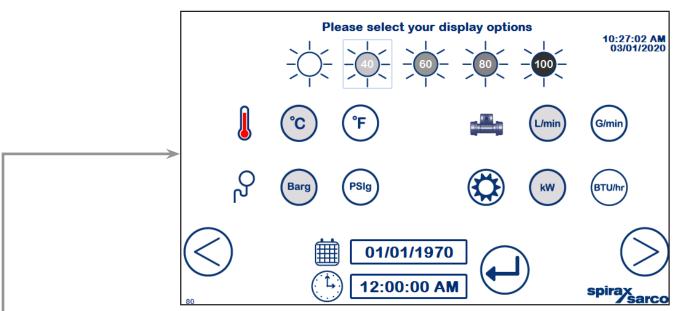

CSG-FBHP Clean steam generation system for Food & Beverage

10.2 Home screen

The home screen (110) gives the user the ability to quickly view the essential parameters and run status of the CSG-FBHP. Additionally, more detailed parameters and process values are quickly and easily accessible.


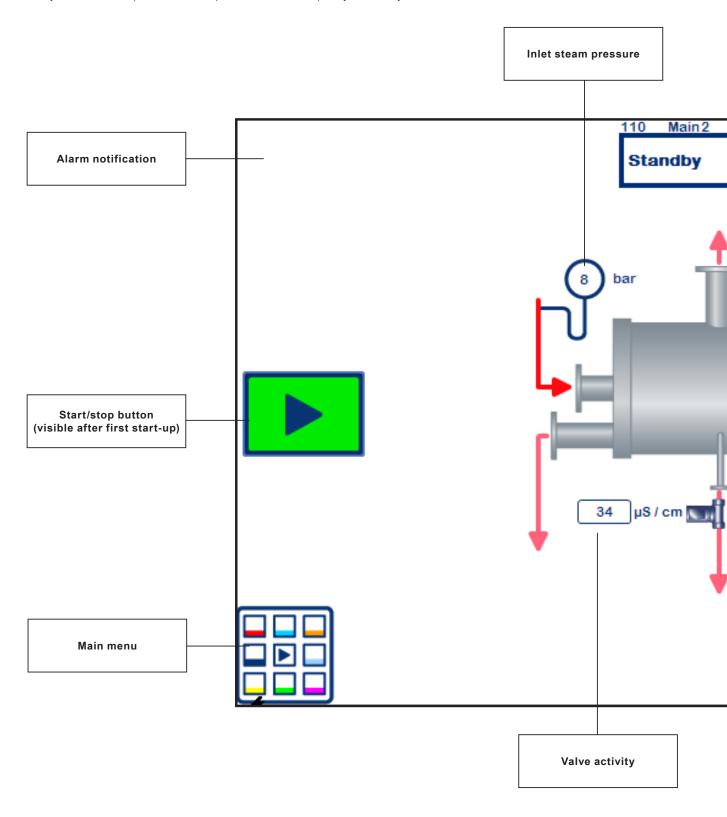



Fig. 10

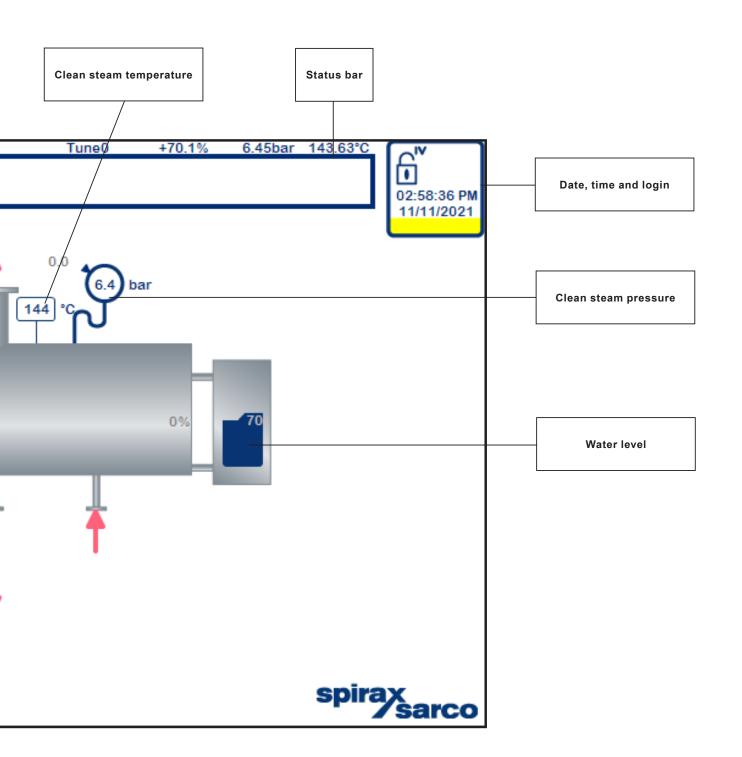



10.3 Main menu


90

By selecting the Main Menu button from the Home screen, the user has access to settings, alarms and diagnostics screens. These are split in to 6 sub-menus as described below.

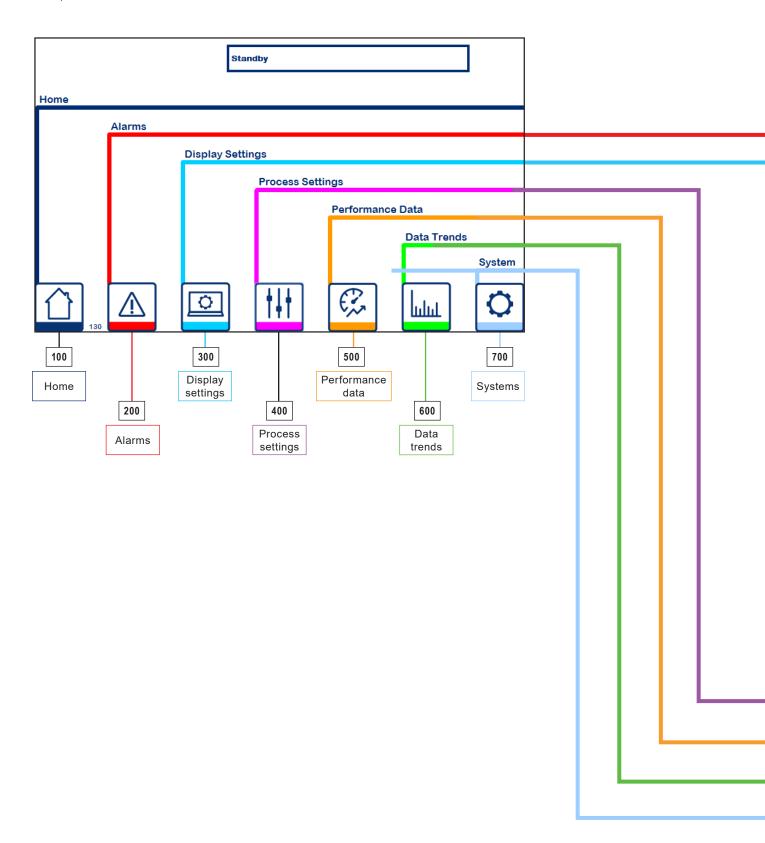

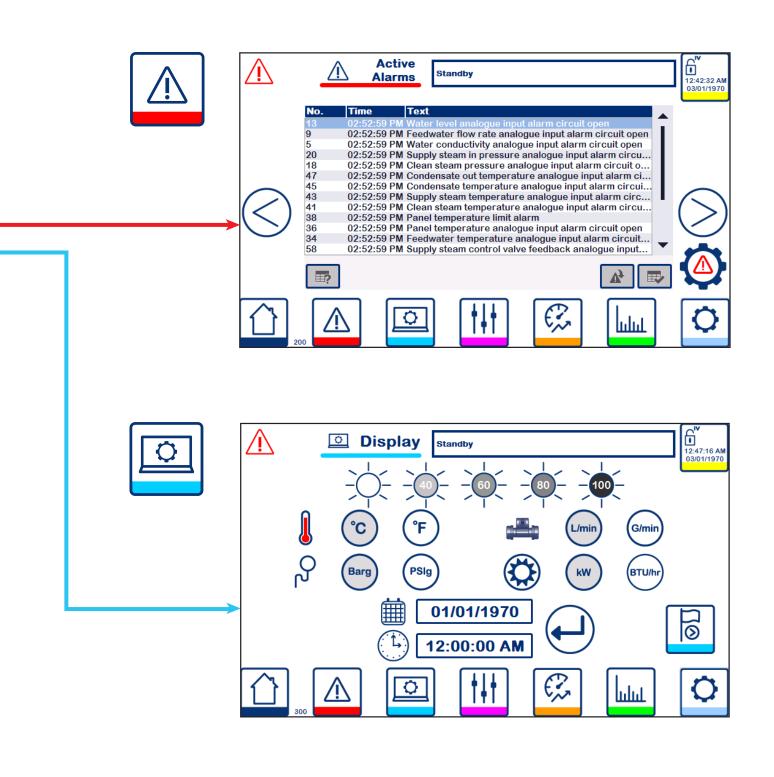

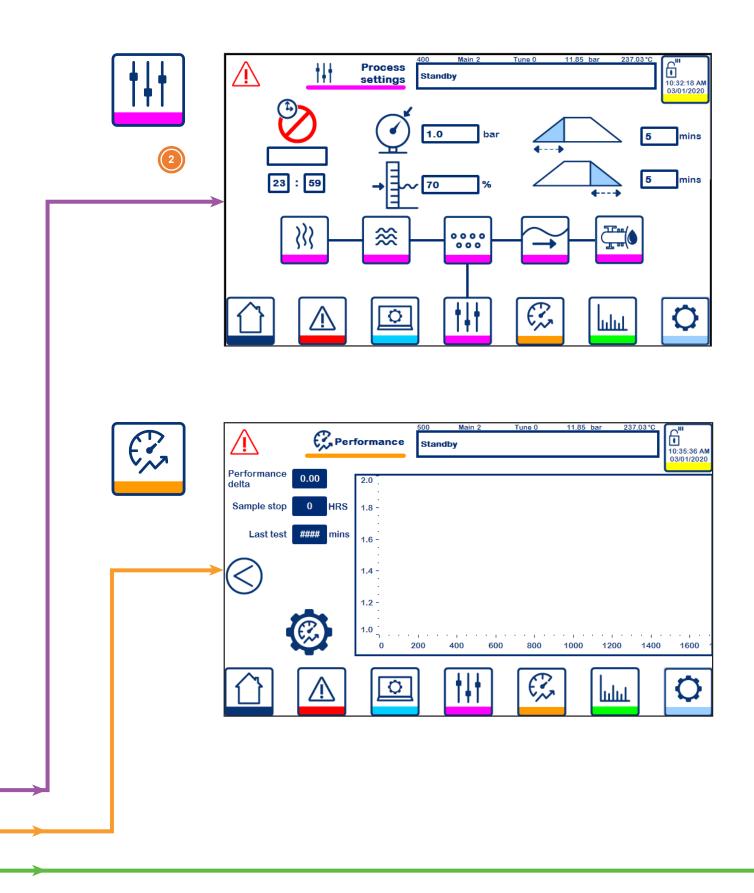

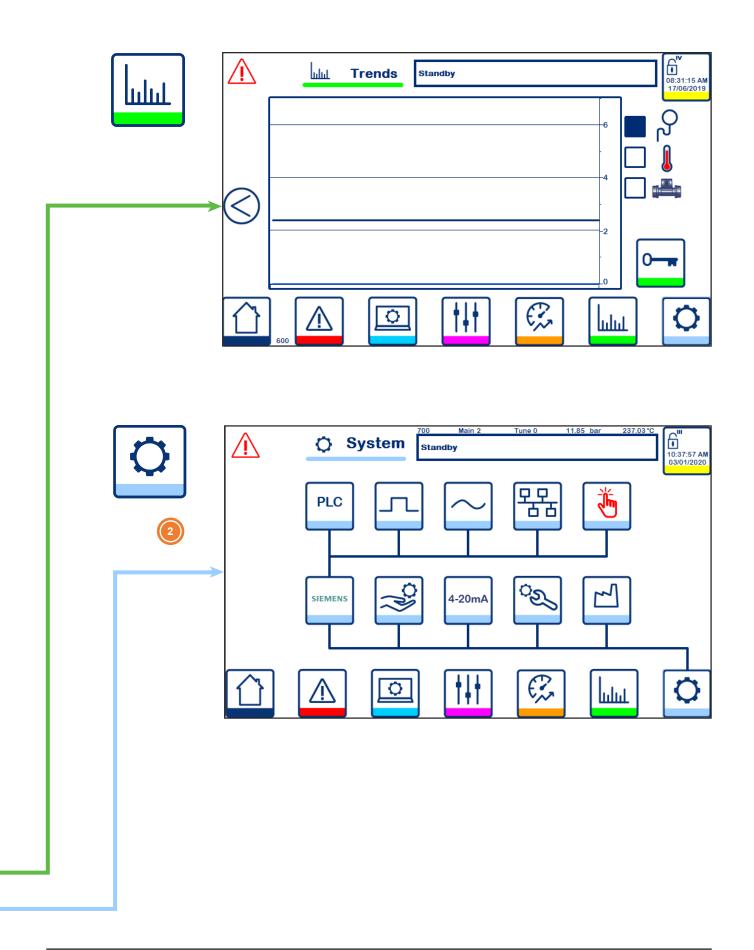


10.4 Alarms


94

The alarm screens display active and historic alarms as well as all the settings for the diagnostics alarms.




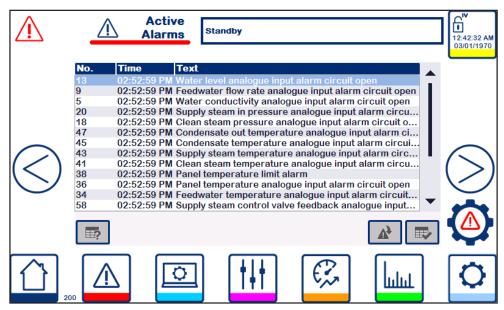

Active alarms (200) remains on screen until they are acknowledged by the user.

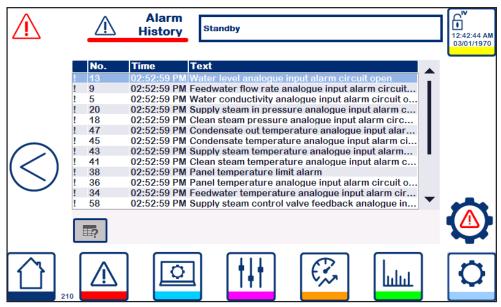


Alarms history (210) provides an historic log of previous alarms including time and date stamp for clarification and diagnosis. A rolling total of 1024 alarms are retained until a power cycle of the CSG-FBHP.

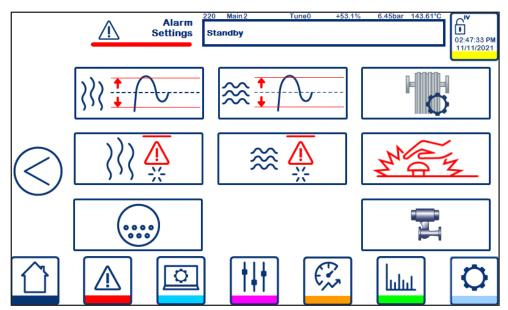

Alarm settings (220)


10.5 Display settingsThe display settings screen, as well as altering the display units for the HMI, the user can also alter the time, date and language.



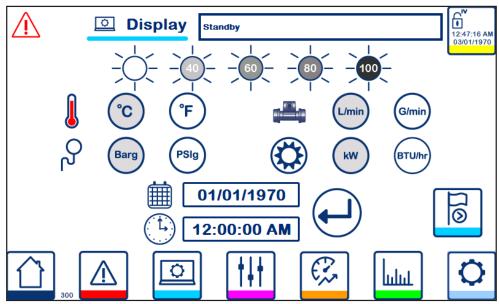

Display settings (300)



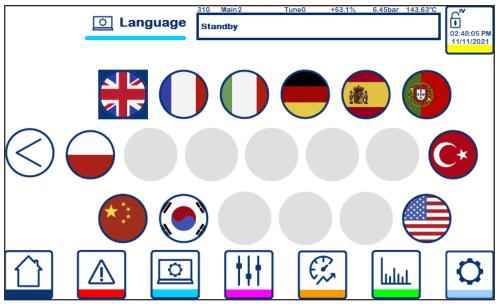


Language (310)

10.6 Process settings

The settings available across the process settings screens directly affect the running of the CSG-FBHP and the effective output of clean steam.






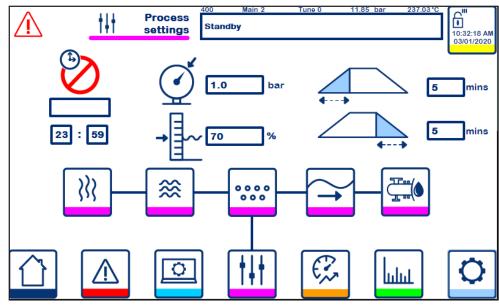

Main process set-points (400). Including clean steam pressure, water level, ramp up time and ramp down time.






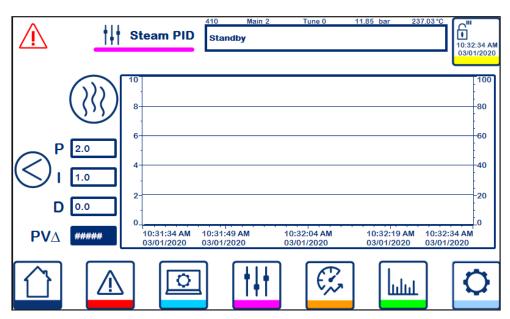

Steam PID settings (410) also includes a live PID graph showing the process and control values, and the process set-point.






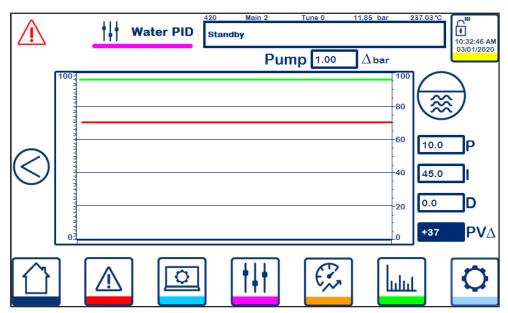

Water PID settings (420) also includes the pump offset value and a live PID graph showing the process and control values, and the process set-point.






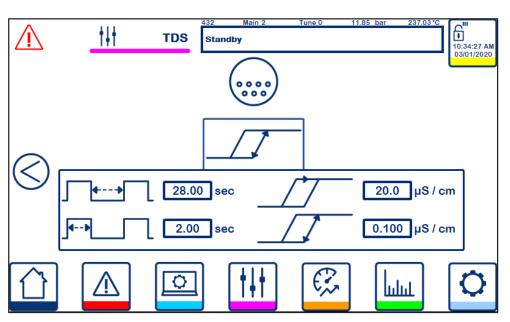

TDS settings (430-432) allows the user to set and select the TDS control they require.






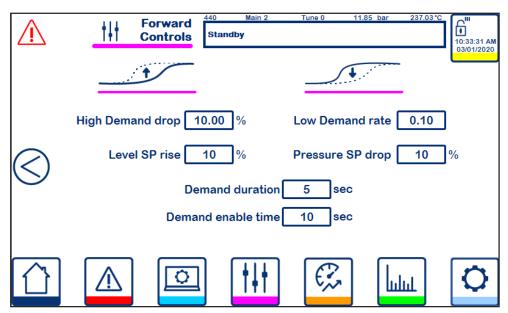

Forward controls (440)






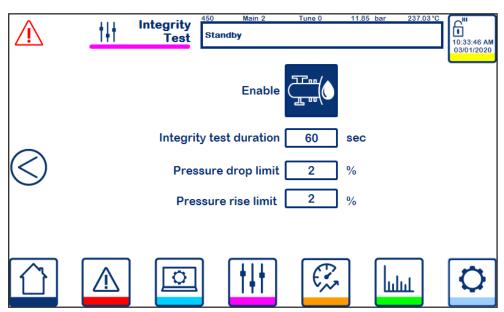

Integrity test (450)

10.7 Performance data


The performance data screen will only display the performance profile of the CSG-FBHP whist in Running mode and once sufficient data has been collected. If the Performance Monitoring options pack has not been installed, no information will be available.

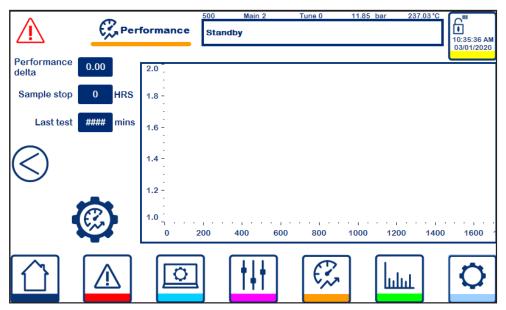

Performance data (500), as well as showing the current performance profile of the CSG-FBHP also shows the current data sample and data times.



100

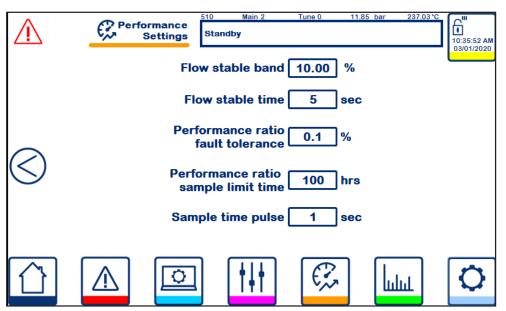

Performance data settings (510) allows users to alter the sampling process and performance tolerance.

10.8 Data trends

The live data displayed on the Trends screen is grouped in to similar process values.




Pressure variables. All currently installed pressure sensors.



Temperature variables. All currently installed temperature sensors.



Flow variable from FA01 if installed.

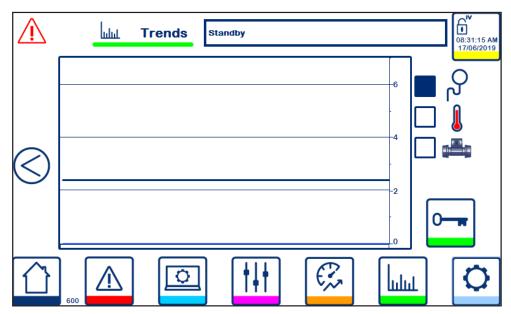


Trends (600) provided a live feed of the selected process variables.


10.9 System

102

System related controls and settings are available for the advanced user to alter the CSG-FBHP away from a pre-configured settings.

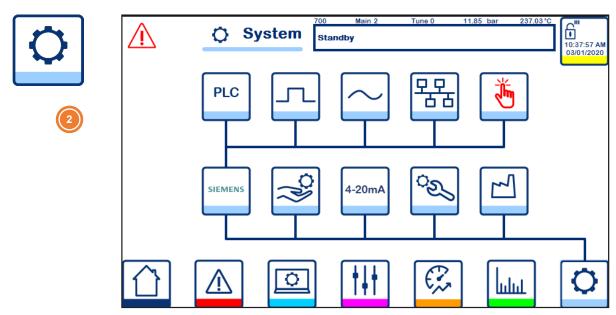


System sub menu (700)

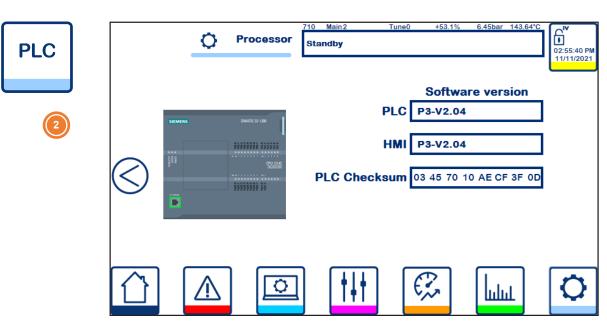

PLC status (710) displays any PLC error codes and the stored PLC date and time.




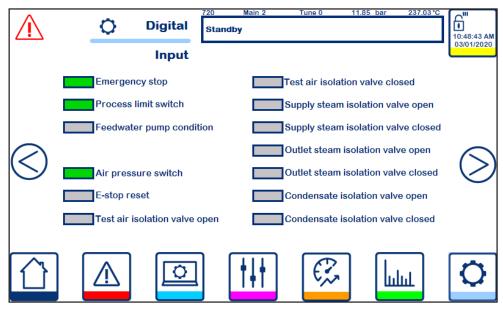

Digital Input status (720) and digital output status (721)






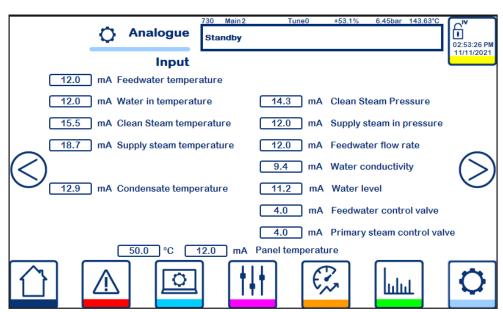

Analogue input status (730) and analogue output status (731)






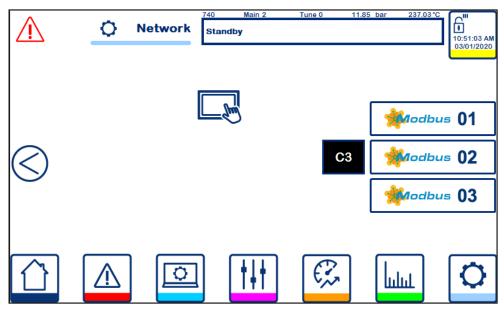


Network status (740)



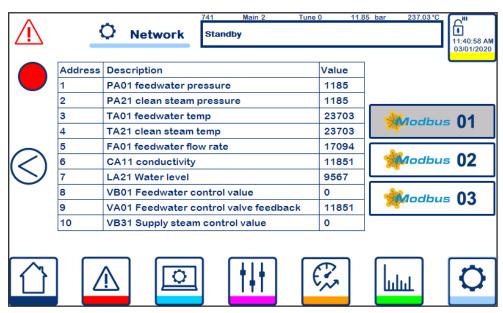


Communications tables and status (741-745)




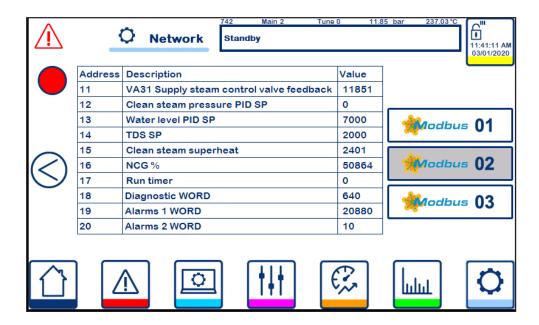



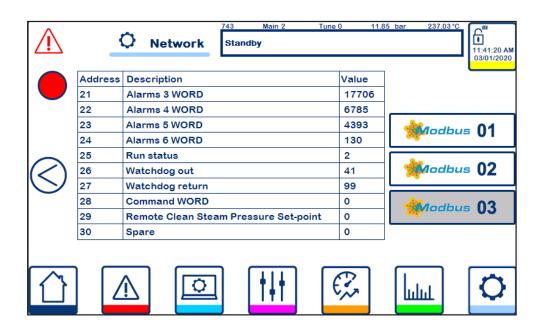




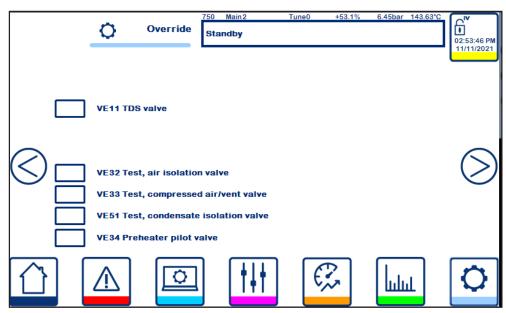

Digital override (750) open and close fitted and available isolation valves (only available in standby mode)






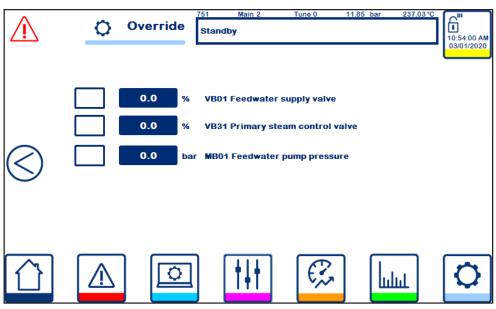

Analogue override (751) enable and move control valves to specific position. (only available in standby mode)






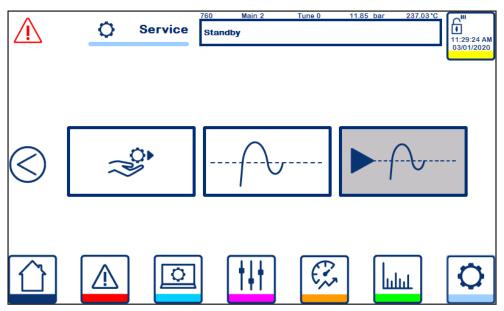

Service (760) allows users to begin service sequence‡, enter PID Tuning mode (only available in standby mode) or Running Tuning mode (only available when in Run mode).






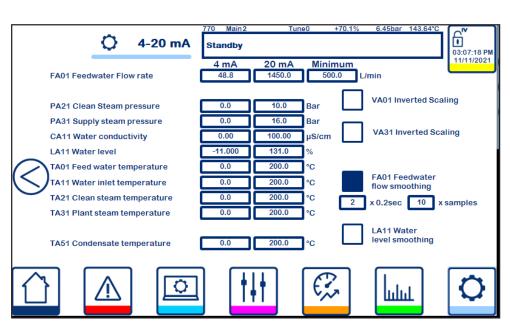

Scaling (770) allows alteration of the 4-20 mA input scaling and the input smoothing of FA01 and LA11 (only available in standby mode).






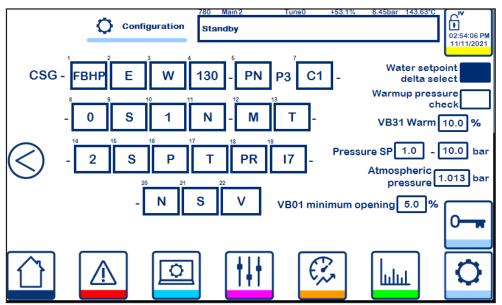

System configuration (780)






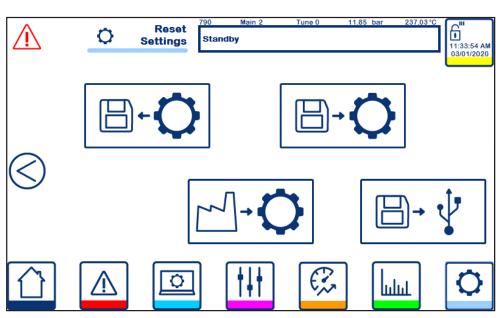

Factory reset (790) allows users to save, load and reset the current settings and configuration of the CSG-FBHP. (only available in standby mode)



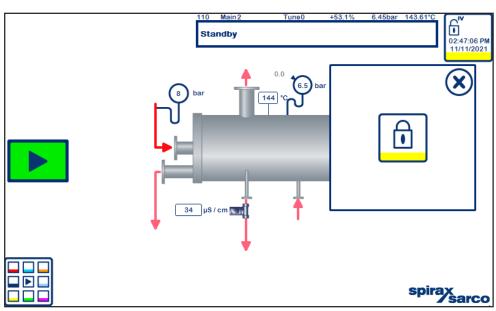

Security screen (800), allows users to logoff from the current user.

CSG-FBHP Clean steam generation system for Food & Beverage

11. Appendix

The torquing procedure should follow the steps detailed in this Appendix.

There are two types of gaskets used on the CSG-FBHP.

PTFE gaskets are used on feedwater and clean steam circuits.

Graphite gaskets are used on plant steam and condensate return lines.

11.1 Torquing procedure:

- If fitting a graphite gasket, lubricate the bolt threads and the nut faces with a suitable lubricant
- If fitting a PTFE gasket, apply a suitable high temperature thread-locking compound (above 200 °C) to the bolt threads
- Insert the bolts through the flanges
- Finger tighten the nuts
- Number all the bolts so that torquing requirements can be followed

11.1.1 For graphite gaskets:

- Apply torque in 20%, 1/5 steps of required final torque, loading all bolts at each step before proceeding to the next step
- Use rotational tightening until all bolts are stable at final torque level

	ANS	I 150	ANSI 300		PN16		PN40	
	Bolt Size	Graphite						
½" (DN15)	1/2"	64	1/2"	64	M12	53	M12	53
³⁄₄" (DN20)	1/2"	81	5/8"	85	M12	53	M12	53
1" (DN25)	1/2"	81	5/8"	122	M12	53	M12	53
1¼" (DN32)	1/2"	81	5/8"	142	M16	131	M16	131
1 ½" (DN40)	1/2"	81	3/4"	230	M16	131	M16	131
2" (DN50)	5/8"	81	5/8"	153	M16	131	M16	131
2½" (DN65)	5/8"	163	3/4"	198	M16	131	M16	131
3" (DN80)	5/8"	163	3/4"	271	M16	131	M16	131
4" (DN100)	5/8"	163	3/4"	271	M16	131	M20	255
5" (DN125)	3/4"	217	3/4"	271	M16	131	M24	441
6" (DN150)	3/4"	271	3/4"	271	M20	255	M24	441
8" (DN200)	3/4"	271	7/8"	434	M20	255	M27	647

Torque values in Nm for Graphite gaskets.


Note - gaskets as per original spare parts.


11.1.2 For PTFE gaskets:


- Use the same rotational tightening technique as per the graphite gaskets
- Due to the nature of PTFE gaskets, torquing is not possible. Instead, the PTFE gasket will start to compress as the nut is tightened.
- Tighten each nut so that a degree of compression on the gasket has been observed
- Do not continue to overtighten the nuts as this will over-compress the gasket


During operation of the CSG-FBHP, thermal expansion in the flanges may cause the nuts to loosen. It is good practice to regularly check the nuts and retighten as required.

Note – PTFE gaskets should not be reused if the flange has been disassembled. PTFE can never be disposed of in incinerators. See section 1.16 Disposal for correct disposal of PTFE gaskets.









Sequential	Rotational
Order	Order
1-2	1
3-4	3
	2
	4

Sequential Order	Rotation Order
1-2	1
3-4	5
5-6	3
7-8	7
	2
	6
	4
	8

Sequential Order	Rotational Order
Order	Oldel
1-2	1
3-4	5
5-6 7-8	9
7-0 9-10	3
11-12	7
	11
	2
	6
	10
	4
	8
	12

Sequential Order 1-2 3-4 5-6 7-8 9-10 11-12 13-14 15-16	Rotational Order 1 9 5 13 3 11 7
	2
	10
	6 14
	4
	12
	8
	16

	Setting	Units	Lower limit	Upper limit	Default	Setting
	Alarm settings					
}}}	Clean steam pressure band ala	ırm				
• • • • • • • • • • • • • • • • • • • •	High band	%	1.0	10.0	10.0	
·	Low band	%	1.0	10.0	10.0	
	Alert time	sec	1	30	10	
	Alarm time	sec	30	180	30	
≋ ‡∕\-	Water level band alarm					
• • • • • • • • • • • • • • • • • • • •	High band	%	1.0	10.0	10.0	
·	Low band	%	1.0	10.0	10.0	
	Alert time	sec	1	30	10	
	Alarm time	sec	30	180	30	

	Setting	Units	Lower limit	Upper limit	Default	Setting		
}}} <u>₹</u>	Clean steam control capacity alarm							
	Alert time	sec	1	60	30			
<u> </u>	Alarm time	sec	1	60	60			
≋ 🔆	Water level control capacity alarm							
	Alert time	sec	1	60	30			
<u>^</u>	Alarm time	sec	1	60	60			
••••	TDS alarm							
0000	TDS high time	sec	0	600	600			
(L)	Hysteresis time	sec	0	600	600			

CSG-FBHP Clean steam generation system for Food & Beverage

	Setting	Units	Lower limit	Upper limit	Default	Setting
	Trap Diagnostics					
} }} \	Trap fail open temperature difference	°C			15.0	
	Trap fail closed temperature	°C			15.0	
	Maximum water level valve opening	sec	0.0	20.0	5.0	
	Maximum clean steam valve opening	sec	0.0	20.0	10.0	

	Setting	Units	Lower limit	Upper limit	Default	Setting
111	Process settings					
	Main process (FB-S and FB	-F)				
Q	Clean steam pressure	bar	1.0	6.0	1.0	
→ _~	Water level	%	60	80	70	
••	Ramp up time	min	2	10	5	
	Ramp down time	min	2	10	5	
	Timed shut-down	time	00:00	23:59	disabled	
	Main process (FB-O and FB	8-W)				
Q	Clean steam pressure	bar	1.0	10.0	1.0	
→ -	Water level	%	56	80	68	
4	Ramp up time	min	2	10	5	
••	Ramp down time	min	2	10	5	
8	Timed shut-down	time	00:00	23:59	disabled	

	Setting	Units	Lower limit	Upper limit	Default	Setting
} }}	Clean Steam PID					
	Proportional gain	-	1.0		2.0	
	Integral gain	-	0.0		1.0	
	Derivative gain	-	0.0		0.0	
	Water level PID					
	Proportional gain	-	1.0		10.0	
	Integral gain	-	0.0		45.0	
	Derivative gain	-	0.0		0.0	
	Pump pressure	∆bar	0.5	2.0	1.0	
0000	TDS (Interval only)					
├	Interval time	sec	5.00		28.00	
4	Duration time	sec	0.00		2.00	
			(FB-S mir	nimum 5% of i	nterval time)	
0000	TDS (CP10)					
├	Interval time	sec	5.00		28.00	
 ▶	Duration time	sec	0.00		2.00	
			(FB-S mir	nimum 5% of i	nterval time)	
	TDS setpoint	μS	10.0		35.0	
	Hysteresis band	μS	0.001	20.000	0.100	

	Setting	Units	Lower limit	Upper limit	Default	Setting
0000	TDS (CP32)					
□	Interval time	sec	5.00		28.00	
∮ ▶	Duration time	sec	0.00		2.00	
	TDS setpoint	μS	10.0		35.0	
	Hysteresis band	μS	0.001	20.000	0.100	
\rightarrow	Forward Controls					
	High Demand drop	%	5.00	20.00	10.00	
	Level SP rise	%			10	
	Low Demand rate		0.00	1.00	0.10	
	Pressure SP drop	%			10	
	Demand duration	sec	1	10	5	
	Demand enable time	sec	1	60	10	
L vo	Integrity test				Enable	
	Integrity test duration	sec			60	
	Pressure drop limit	%	-100	-1	-2	
	Pressure rise limit	%	100	1	2	

	Setting	Units	Lower limit	Upper limit	Default	Setting
®	Performance Monitoring Setting	ıgs				
	Flow stable band	%			10.00	
	Flow stable time	sec			5	
	Performance ratio fault tolerance	%			0.1	
	Performance ratio sample limit time	hrs			100	
	Sample time pulse	sec			1	
4-20mA	4-20mA (FB-S and FB-F)					
	FA01 4mA	L/min			48.80	
	FA01 20mA	L/min			1450.0	
	PA01 4mA	bar			0.00	
	PA01 20mA	bar			10.0	
	PA21 4mA	bar			0.00	
	PA21 20mA	bar			10.0	
	PA31 4mA	bar			0.00	
	PA31 20mA	bar			10.0	
	CA11 4mA	μS			0.0	
	CA11 20mA	μS			100.0	
	LA11 4mA (Viscorol)	%			0.0	
	LA11 20mA (Viscorol)	%			100.0	
	LA11 4mA (LP20)	%			16.7	
	LA11 20mA (LP20)	%			83.3	
	FA01 Feedwater flow smoothing				Enable	
	FA01 smothing interval	0.2sec			2	
	FA01 smothing samples				10	
	LA11 Water level smoothing				Disable	
	LA11 smothing interval	0.2sec			1	
	LA11 smothing samples				2	

	Setting	Units	Lower limit	Upper limit	Default	Setting
4-20mA	4-20mA (FB-O and FB-W)					
	FA01 4mA	L/min			48.80	
	FA01 20mA	L/min			1450.0	
	PA01 4mA	bar			0.00	
	PA01 20mA	bar			16.0	
	PA21 4mA	bar			0.00	
	PA21 20mA	bar			16.0	
	PA31 4mA	bar			0.00	
	PA31 20mA	bar			16.0	
	CA11 4mA	μS			0.0	
	CA11 20mA	μS			100.0	
	LA11 4mA	%			43.0	
	LA11 20mA	%			100.0	
	FA01 Feedwater flow smoothing				Enable	
	FA01 smothing interval	0.2sec			2	
	FA01 smothing samples				10	
	LA11 Water level smoothing				Disable	
	LA11 smothing interval	0.2sec			1	
	LA11 smothing samples				2	
<u>_</u>	Configuration					
	Water setpoint delta select				Enable	
	Warmup pressure check				Enable	
	(Disable for FB-O and FB-W)					
	VB31 warm	%			10.0	
	Pressure SP minimum	bar	0.0	10.0	1.0	
	Pressure SP maximum	bar	0.0	10.0	6.0	
	(10.0 for FB-O and FB-W)					
	Atmospheric Pressure	barA			1.013	
	VB01 minimum opening	%			5	

Service

For technical assistance contact our nearest Office or Agency or contact directly:

SPIRAX SARCO S.r.l. - Service Via per Cinisello, 18-20834 Nova Milanese (MB)-Italy Tel.: (+39) 0362 4917 257-(+39) 0362 4917 211 Fax: (+39) 0362 4917 315

E-mail: support@it.spiraxsarco.com

120

WarrantyAscertained partial or complete non-compliance with these regulations will result in forfeiture of the related warranty.