

Dri-Line Mk2

Spirax-Monnier Compressed Air Drain Trap

Installation and Maintenance Instructions

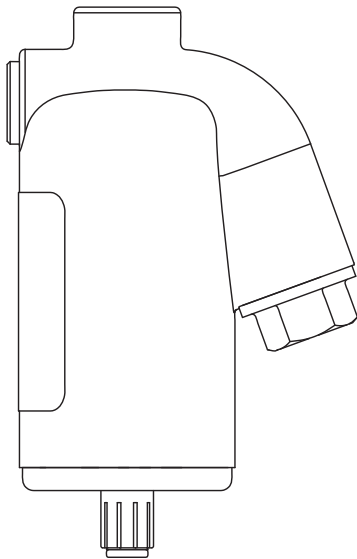


1. Safety information
2. General product information
3. Installation and operation
4. Spare parts and maintenance

1. Safety information

Safe operation of this product can only be guaranteed if it is properly installed, commissioned, used and maintained by qualified personnel (see Section 1.11) in compliance with the operating instructions. General installation and safety instructions for pipeline and plant construction, as well as the proper use of tools and safety equipment must also be complied with.

1.1 Intended use

Referring to the Installation and Maintenance Instructions, name-plate and Technical Information Sheet, check that the product is suitable for the intended use/application. The product complies with the requirements of the European Pressure Equipment Directive 2014/68/EU and falls within the category 'SEP'.

It should be noted that products within this category are required by the Directive not to carry the  mark.

- i) This product has been specifically designed for use on compressed air, which is in Group 2 of the above mentioned Pressure Equipment Directive. The products' use on other fluids may be possible but, if this is contemplated, Spirax Sarco should be contacted to confirm the suitability of the product for the application being considered.
- ii) Check material suitability, pressure and temperature and their maximum and minimum values. If the maximum operating limits of the product are lower than those of the system in which it is being fitted, or if malfunction of the product could result in a dangerous overpressure or overtemperature occurrence, ensure a safety device is included in the system to prevent such over-limit situations.
- iii) Determine the correct installation situation and direction of fluid flow.
- iv) Spirax Sarco products are not intended to withstand external stresses that may be induced by any system to which they are fitted. It is the responsibility of the installer to consider these stresses and take adequate precautions to minimise them.
- v) Remove protection covers from all connections and protective film from all name-plates, where appropriate, before installation on steam or other high temperature applications.

1.2 Access

Ensure safe access and if necessary a safe working platform (suitably guarded) before attempting to work on the product. Arrange suitable lifting gear if required.

1.3 Lighting

Ensure adequate lighting, particularly where detailed or intricate work is required.

1.4 Hazardous liquids or gases in the pipeline

Consider what is in the pipeline or what may have been in the pipeline at some previous time. Consider: flammable materials, substances hazardous to health, extremes of temperature.

1.5 Hazardous environment around the product

Consider: explosion risk areas, lack of oxygen (e.g. tanks, pits), dangerous gases, extremes of temperature, hot surfaces, fire hazard (e.g. during welding), excessive noise, moving machinery.

1.6 The system

Consider the effect on the complete system of the work proposed. Will any proposed action (e.g. closing isolation valves, electrical isolation) put any other part of the system or any personnel at risk?

Dangers might include isolation of vents or protective devices or the rendering ineffective of controls or alarms. Ensure isolation valves are turned on and off in a gradual way to avoid system shocks.

1.7 Pressure systems

Ensure that any pressure is isolated and safely vented to atmospheric pressure. Consider double isolation (double block and bleed) and the locking or labelling of closed valves. Do not assume that the system has depressurised even when the pressure gauge indicates zero.

1.8 Temperature

Allow time for temperature to normalise after isolation to avoid danger of burns.

1.9 Tools and consumables

Before starting work ensure that you have suitable tools and/or consumables available. Use only genuine Spirax Sarco replacement parts.

1.10 Protective clothing

Consider whether you and/or others in the vicinity require any protective clothing to protect against the hazards of, for example, chemicals, high/low temperature, radiation, noise, falling objects, and dangers to eyes and face.

1.11 Permits to work

All work must be carried out or be supervised by a suitably competent person.

Installation and operating personnel should be trained in the correct use of the product according to the Installation and Maintenance Instructions.

Where a formal 'permit to work' system is in force it must be complied with. Where there is no such system, it is recommended that a responsible person should know what work is going on and, where necessary, arrange to have an assistant whose primary responsibility is safety.

Post 'warning notices' if necessary.

1.12 Handling

Manual handling of large and/or heavy products may present a risk of injury. Lifting, pushing, pulling, carrying or supporting a load by bodily force can cause injury particularly to the back. You are advised to assess the risks taking into account the task, the individual, the load and the working environment and use the appropriate handling method depending on the circumstances of the work being done.

1.13 Residual hazards

In normal use the external surface of the product may be very hot. If used at the maximum permitted operating conditions the surface temperature of some products may reach temperatures of 90 °C (194 °F).

Many products are not self-draining. Take due care when dismantling or removing the product from an installation (refer to 'Maintenance instructions').

1.14 Freezing

Provision must be made to protect products which are not self-draining against frost damage in environments where they may be exposed to temperatures below freezing point.

1.15 Disposal

Unless otherwise stated in the Installation and Maintenance Instructions, this product is recyclable and no ecological hazard is anticipated with its disposal providing due care is taken.

Please visit the Spirax Sarco product compliance web pages

<https://www.spiraxsarco.com/product-compliance>

for up to date information on any substances of concern that may be contained within this product. Where no additional information is provided on the Spirax Sarco product compliance web page, this product may be safely recycled and/or disposed providing due care is taken. Always check your local recycling and disposal regulations.

1.16 Returning products

Customers and stockists are reminded that under EC Health, Safety and Environment Law, when returning products to Spirax Sarco they must provide information on any hazards and the precautions to be taken due to contamination residues or mechanical damage which may present a health, safety or environmental risk. This information must be provided in writing including Health and Safety data sheets relating to any substances identified as hazardous or potentially hazardous.

2. General product information

2.1 General description

The Spirax-Monnier Dri-Line Mk2 is a float operated compressed air condensate drain trap. It is designed for use on systems up to 16 bar g.

Principal features:

- Black epoxy finish - internal and external.
- Discharge can be piped to drain.
- Built-in strainer screen.
- High discharge capacity.
- Blast action discharge.

2.2 Sizes and pipe connections

½" screwed BSP T Rp (ISO 7-1).

2.3 Operating limits

Maximum working pressure	16 bar g
Minimum operating pressure	0.1 bar g
Maximum working temperature	80 °C
Maximum discharge capacity	20 L/h @ 6 bar

2.4 Materials

No.	Part	Material	
1	Body	Epoxy coated aluminium	LM25WP
2	Autodrain mechanism	Acetal plastic/nickel plated brass	
3	Strainer screen	0.8 mm perforated	316L
4	'O' rings	Nitrile	

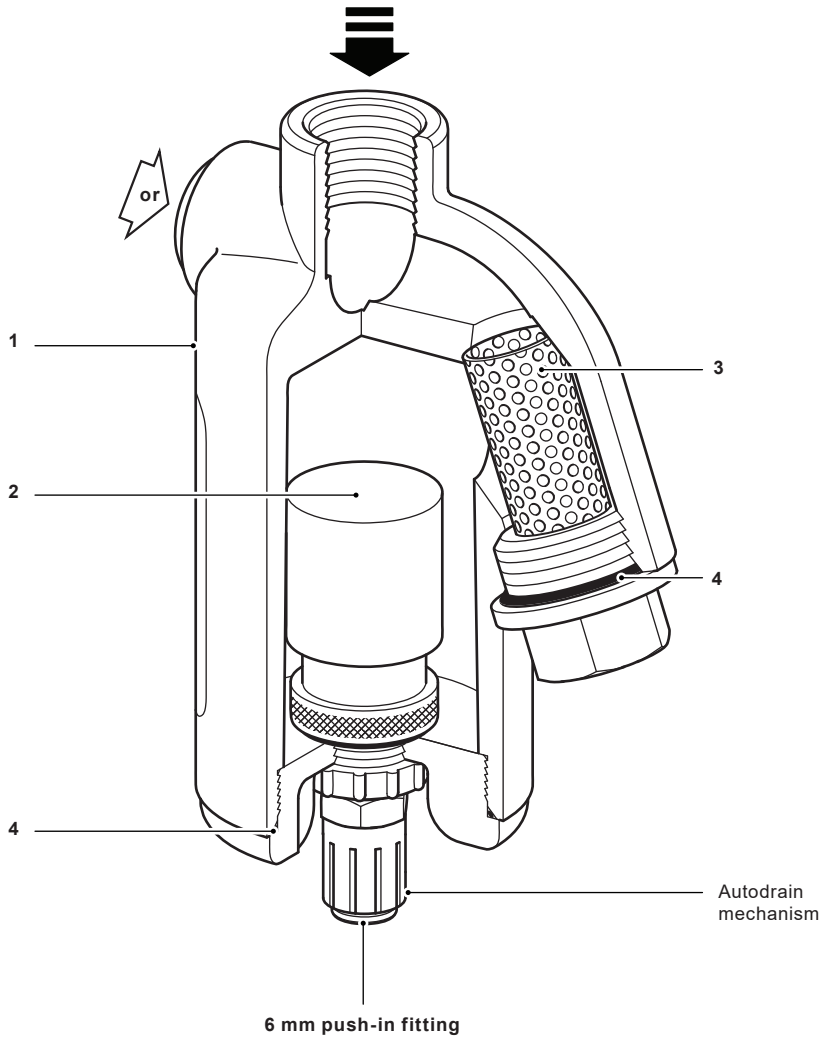


Fig. 1 Dri-Line Mk2 Spirax-Monnier compressed air drain trap

3. Installation and operation

Note: Before actioning any installation observe the 'Safety information' in Section 1.

Referring to the Installation and Maintenance Instructions, name-plate and Technical Information Sheet, check that the product is suitable for the intended application.

3.1 Installation:

- The Dri-Line Mk2 should be fitted with the inlet port (top or side entry) at the top, so that the float mechanism can rise and fall vertically.

Please note: The unit is supplied ready for top entry installation. To change the inlet to side entry for connection to pipework, unscrew the ½" socket pipe plug (6), and re-use it to seal the top connection.

- Adequate space should be provided around the unit to allow easy access for routine maintenance requirements (see Figure 2 for withdrawal distances).
- Connect the unit so that the airflow is in the direction indicated by the arrow on the body.
- The unit should be installed as close as possible to the equipment it is serving.

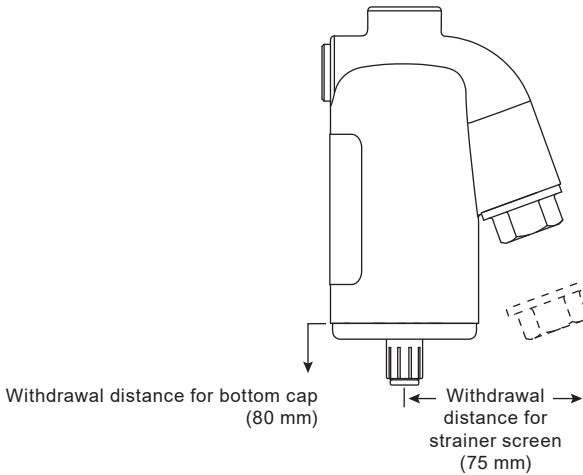


Fig. 2

3.3 Typical installations

Fig. 3
Dri-Line Mk2 draining a receiver or larger filter

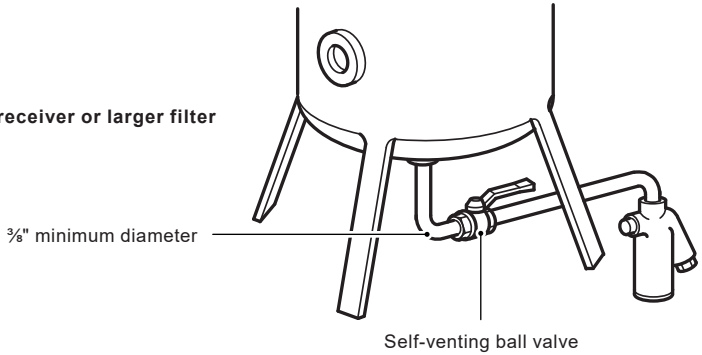


Fig. 4
Dri-Line Mk2 draining a compressed air main relay point


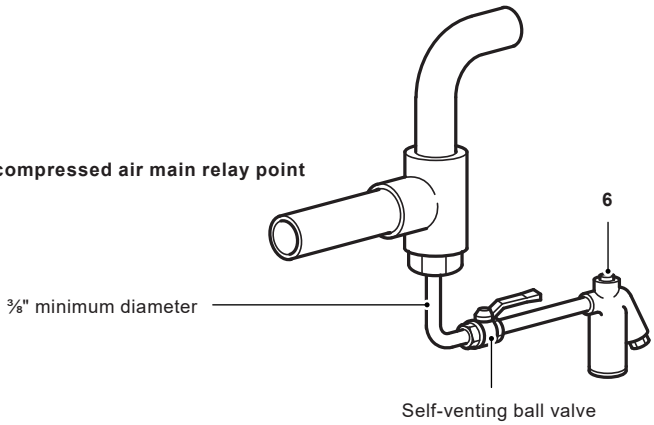


Fig. 5
Dri-Line Mk2 draining a separator on a compressed air main

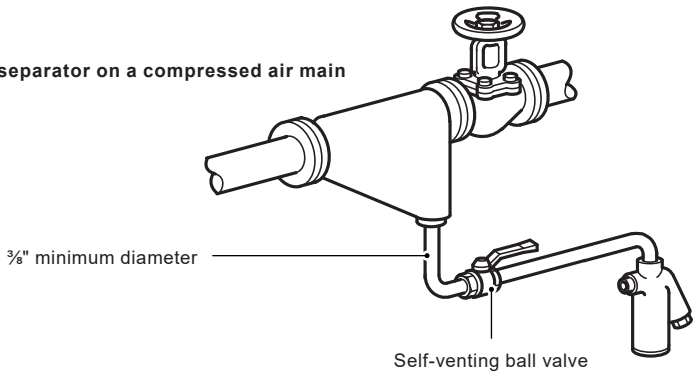

3.4 Operation

The Spirax-Monnier Dri-Line Mk2 is a self-acting device. To activate manual override, twist the lowermost part of the mechanism anticlockwise from O to I.

Drain operation

Pressure to close drain: Greater than 0.3 bar g.

Pressure to open drain: Less than 0.2 bar g.

Minimum air flow to close drain: 0.6 dm³/s




Fig. 6

4. Spare parts and maintenance

4.1 Spare parts

The spare parts available are shown in solid outline. Parts drawn in a grey line are not supplied as spares.

Available spares

Internal autodrain sub-assembly	A, C, D, W
Strainer screen	V
Strainer cap 'O' ring (packet of 3)	X

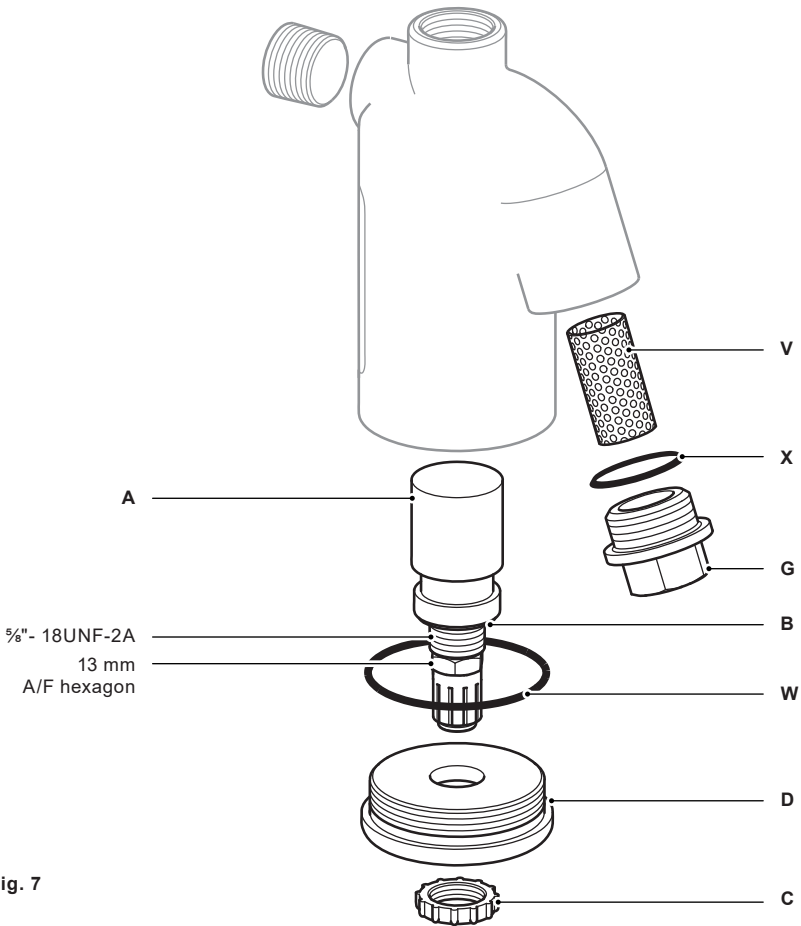


Fig. 7

4.2 Maintenance

Note: Before actioning any maintenance observe the 'Safety information' in Section 1.

- Isolate and vent the unit from the system pressure (preferably using a self-venting ball valve).
- The unit can be dismantled in-situ for either servicing / maintenance, or removed completely from the air system.

4.2.1 How to clean or replace the strainer screen (V):

- Unscrew the strainer cap (G) using a 7/8" A/F spanner and remove the strainer screen from the body.
- Clean or replace the strainer screen (V) and refit. Fit a new 'O' ring (X). Tighten the strainer cap (G) to 10 N m.

4.2.2 How to clean or replace the autodrain mechanism:

- Unscrew the bottom cap (D – using the special tool available from Spirax Sarco) and remove the autodrain mechanism.
- Unscrew the locking ring (C).
- Clean the screen (F) using soap and water.

Do not attempt to dismantle the autodrain mechanism (A) as it is a non-servicable item.

- Refit or replace the autodrain mechanism (A) and hand tighten using the locking ring (C).
- Please note that the silicone free nitrile rubber gasket (B) is a non-replaceable item.
- Insert the bottom cap (D) complete with autodrain mechanism (A) into the body using a new 'O' ring (W) and tighten to 15 N m.

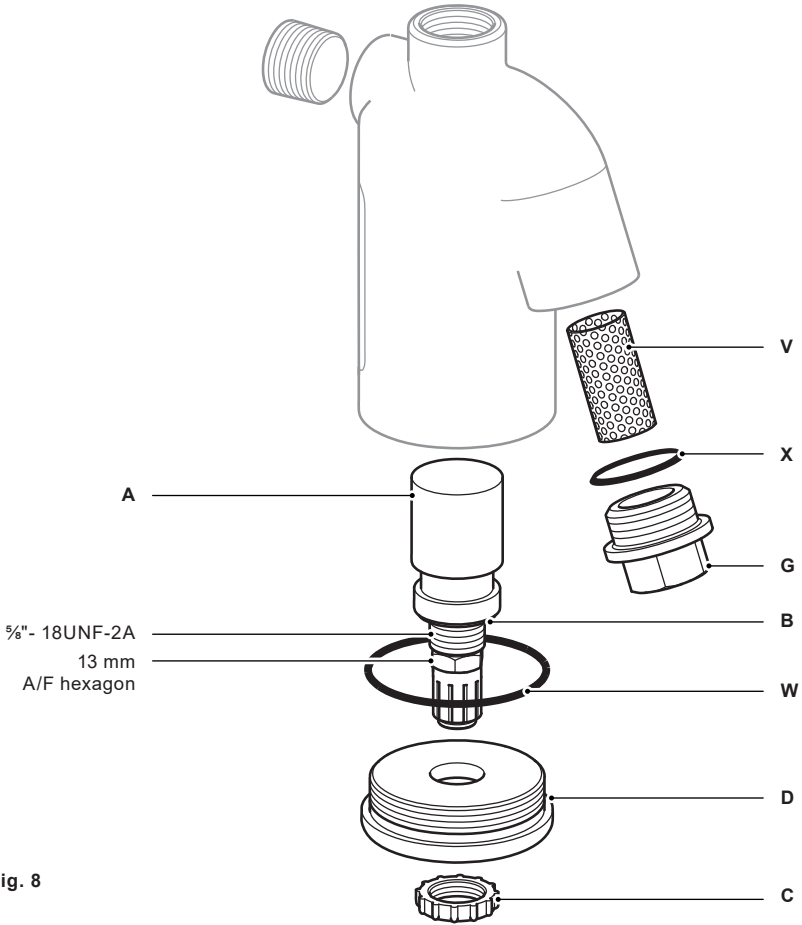


Fig. 8

