




M10HPi ISO Ball Valve DN $\frac{1}{4}$ " to DN2"

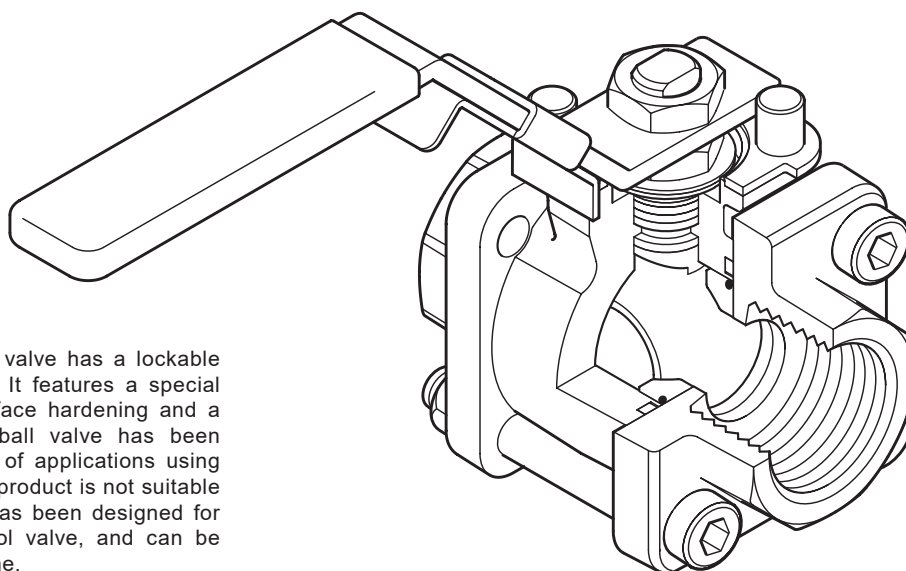

Description

The M10HPi ISO three-piece body ball valve has a lockable handle and ISO mounting as standard. It features a special floating ball, which has received a surface hardening and a blow-out proof stem. This particular ball valve has been specially designed for manual isolation of applications using high-pressure gas (please note that this product is not suitable for oxygen service). The M10HPi ISO has been designed for use as an isolating valve, not a control valve, and can be serviced without removal from the pipeline.

ISO mounting

The integral ISO body mounting allows the valve to be automated without losing seal integrity, as the body does not require disassembly. Manual to remote control may therefore be easily accomplished by the ISO range of Spirax Sarco ball valves.


Available types

M10HPi2 ISO Zinc plated carbon steel body and caps.

M10HPi3 ISO Stainless steel body and caps.

Note: The nomenclature will be followed with either **FB** (full bore) or **RB** (reduced bore).

Standards

This product fully complies with the requirements of the EU Pressure Equipment Directive/UK Pressure Equipment (Safety) Regulations and carries the  mark when so required.

Certification

This product is available with certification to EN 10204 3.1.

Note: All certification/inspection requirements must be stated at the time of order placement.

Options

- Self-venting ball.
- Extended stem 100 mm (4") to allow full insulation.
- Fully degreased under request.

Technical data

Flow characteristic Modified linear

Port Full and reduced bore versions

Leakage test procedure to ISO 5208 (Rate A)/EN 12266-1 (Rate A)

Antistatic device Complies with ISO 7121 and BS 5351

Sizes and pipe connections

Full bore

$\frac{1}{4}$ ", $\frac{3}{8}$ ", $\frac{1}{2}$ ", $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ " and 1 $\frac{1}{2}$ "


Screwed BSP, BSPT, NPT, BW, SW

Reduced bore

$\frac{1}{4}$ ", $\frac{3}{8}$ ", $\frac{1}{2}$ ", $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " and 2"

Screwed BSP, BSPT, NPT, BW, SW

Pressure/temperature limits

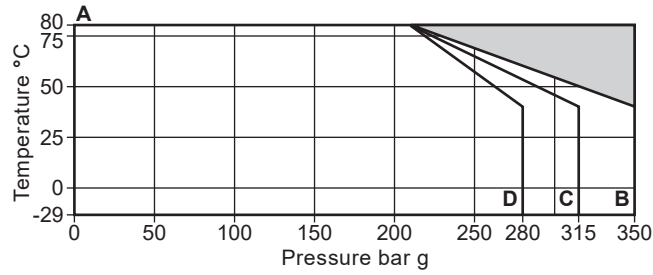

The product **must not** be used in this region.


A - B 1/4", 3/8" and 1/2" RB

A - C 1/2" FB; 3/4" and 1" RB

A - D 1" FB; 1 1/4", 1 1/2" and 2" RB

		1/4", 3/8" and 1/2" RB	350 bar
PMA	Maximum allowable pressure	1/2" FB; 3/4" and 1" RB	315 bar
		1" FB; 1 1/4", 1 1/2" and 2" RB	280 bar
TMA	Maximum allowable temperature		80 °C
	Minimum allowable temperature		-29 °C
TMO	Maximum operating temperature		80°C @ 210 bar g
	Minimum operating temperature		-29 °C
Note: For lower operating temperatures consult Spirax Sarco.			
ΔPMX Maximum differential pressure is limited to the PMO			
Designed for a maximum cold hydraulic test pressure of 1.5 x PMO			

Materials

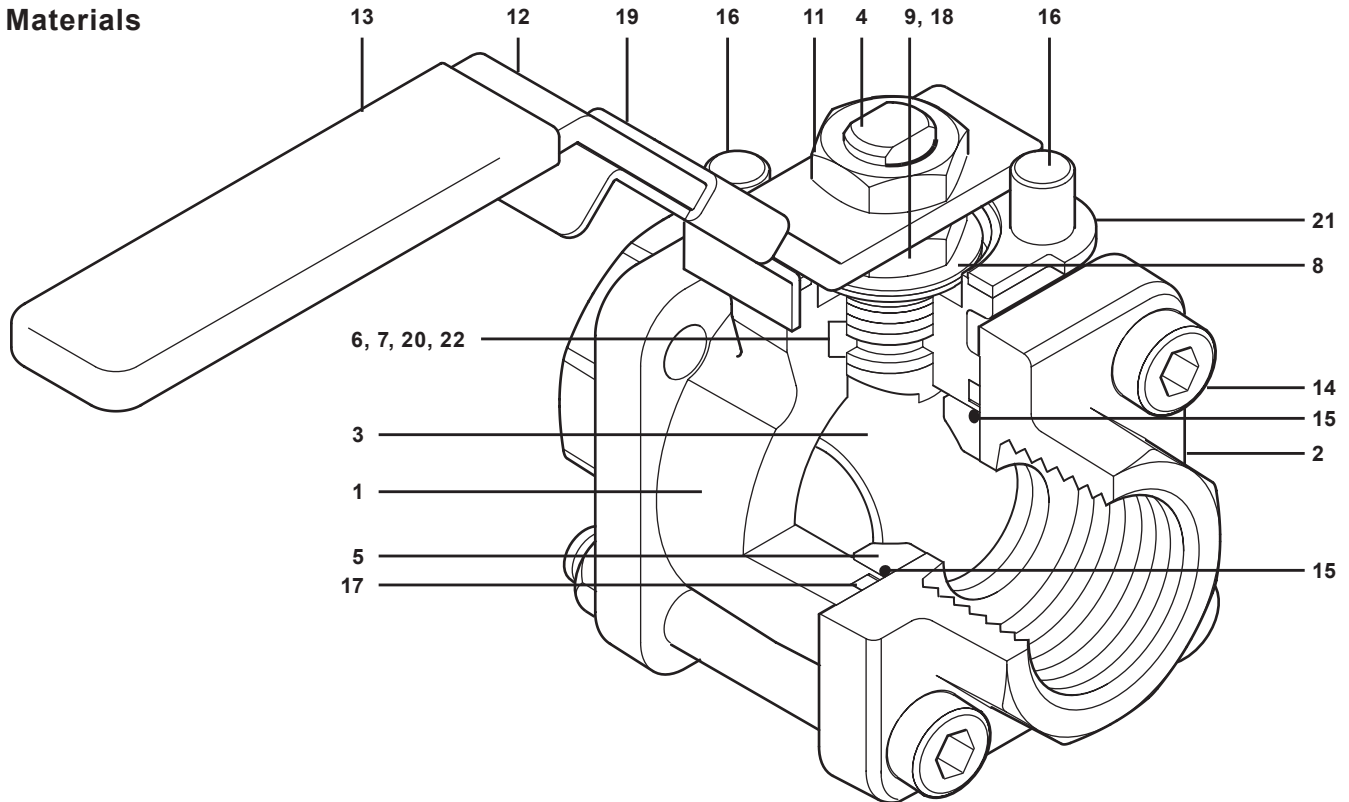

No.	Part	Material
1	Body	M10HPi2 ISO Zinc plated carbon steel ASTM A105
		M10HPi3 ISO Stainless steel ASTM A 182 F 316L
2	Cap	M10HPi2 ISO Zinc plated carbon steel SAE 1040
		M10HPi3 ISO Stainless steel AISI 316
3	Ball	Stainless steel (hardened) AISI 316
4	Stem	Stainless steel AISI 316
5	Seat	Acetal
6	Stem seal	Reinforced PEEK
7	Separator	Zinc plated carbon steel SAE 1010
8	Belleville washer	Stainless steel AISI 301
9	Stem nut	Zinc plated carbon steel SAE 1010
10	Name-plate (Not shown)	Stainless steel AISI 430
11	Upper stem nut	Zinc plated carbon steel SAE 1010
12	Lever	Zinc plated carbon steel SAE 1010
13	Grip	Vinyl green
14	Socket head cap screw	Carbon steel ASTM A 574
15	Seat 'O' ring (2" RB and 1½" FB only)	Viton
16	Stop screw	Zinc plated carbon steel SAE 12L 14
17	Body/cap 'O' ring	Viton
18	Nut locker	Stainless steel AISI 316
19	Lockable handle	Stainless steel AISI 316
20	Stem seal	Reinforced PTFE
21	Lock-plate	Stainless steel AISI 304L
22	Stem seal	Stainless steel AISI 316

Dimensions/weights
(approximate) in mm and kg

Reduced bore

Size	A					Weight
	A1	B	C	D	E	
1/4"	82	162	93	28	11	1.46
3/8"	84	162	93	28	11	1.49
1/2"	84	162	93	28	11	1.46
3/4"	92	162	95	29	14	1.71
1"	114	162	101	34	21	2.54
1 1/4"	132	182	106	40	25	3.92
1 1/2"	146	186	116	46	31	5.56
2"	154	186	123	51	38	6.95

Full bore

Size	A					Weight
	A1	B	C	D	E	
1/4"	82	162	93	28	11	1.46
3/8"	84	162	93	28	11	1.49
1/2"	92	162	95	29	14	1.71
3/4"	114	162	101	34	21	2.54
1"	132	182	106	40	25	3.92
1 1/4"	146	186	116	46	31	5.56
1 1/2"	154	186	123	51	38	6.95

K_v values

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Reduced bore	5	6.8	6	10	27	49	70	103
Full bore	5	6.8	17	36	58	89	153	-

For conversion
 $C_v (UK) = K_v \times 0.963$
 $C_v (US) = K_v \times 1.156$

Operating torque (N m)

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Reduced bore	10	10	10	15	25	40	55	100
Full bore	10	10	15	25	40	55	100	-

The indicated torque values are for valves frequently operated, that are submitted to a maximum differential pressure. Valves that are subject to long static periods, may require greater break-out torque.

