




# Spira-trol™ Two-port Control Valves

## K Series DN125 to DN300 and 6" to 12"

### Description

Spira-trol™ is a range of two-port single seat globe valves with cage retained seats conforming to EN and ASME standard. These valves are available in three body materials in sizes ranging from DN125 to DN300 (6" to 12"). When used in conjunction with a pneumatic or electric linear actuator they provide characterized modulating or on/off control.

**Important note:** Throughout this document, reference has been made to the standard KE or KEA control valve. With the exception of trim type, the KE, KEA, KF, KFA, KL and KLA control valves are identical.

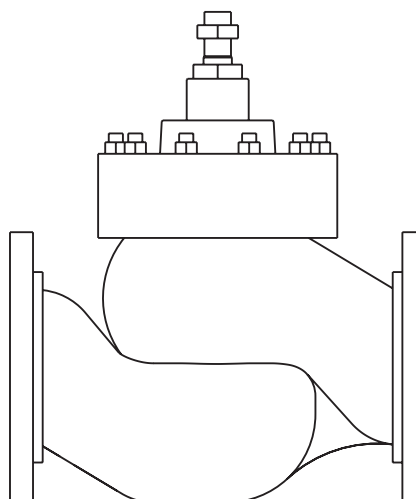

**KE, KF and KL**  
 DN125 to DN300


**KEA, KFA and KLA**  
 6" to 12"

### Sizes and pipe connections

Valve Series	Material	PN16	PN25	PN40	JIS/KS10	JIS/KS20	ASME150	ASME300	
KE	SG Iron	DN125 - DN200			DN125				
	Carbon Steel	DN125 - DN300							
	Stainless Steel	DN125 - DN200							
KEA	Carbon Steel						6" - 12"	6" - 12"	
	Stainless Steel						6" and 8"	6" and 8"	

ASME 150 and ASME 300 are available with Flat face for use with ASME 125 and ASME 250 Flange.

### Standards

Designed in accordance with EN 60534. This product fully complies with the requirements of the European Pressure Equipment Directive 2014/68/EU and carries the  mark when so required.

### Certification

This product is available with certification to EN 10204 3.1. Optional seat leak test is available on request.

**Note:** All certification/inspection requirements must be stated at the time of order placement.

**Spira-trol™ valve characteristic - options:**

**KE and KEA Equal percentage (E)** - Suitable for most modulating process control applications providing good control at all flowrates.

**KF and KFA Fast opening (F)** - For on/off applications only.

**KL and KLA Linear (L)** - Primarily for liquid flow control where the differential pressures across the valve is constant.

**Spira-trol™ valve options:**

<b>Stem sealing</b>	<b>PTFE chevron seals</b>	Standard
	<b>Graphite packing</b>	High temperature applications
<b>Seating</b>	<b>Metal-to-metal</b>	431 stainless steel - standard
	<b>Soft seating</b> (not available in DN300)	Up to 220 °C (428 °F) - PEEK (P) for Class VI shut-off
	<b>Hard facing</b>	316L stainless steel with Stellite™ 6 facing - for more arduous applications
<b>Bonnet type</b>	Standard bonnet	
	Extended bonnet for large pipe lagging or hot/cold applications	
<b>Trim</b>	Standard trim	
	Low noise and anti-cavitation trim (see TI-S24-59)	

**Spira-trol™ valves are compatible with the following actuators and positioners:**

<b>Electric</b>	AEL7
<b>Pneumatic</b>	PN1000, PN2000, PN9000 and TN2000 series
<b>Positioners</b>	PP6 (pneumatic)
	EP6 (electropneumatic)
	SP7 and SP8 (microprocessor based electropneumatic)

**Please refer to respective data sheets.**

For Special trims please refer to TI-S24-59

For DN15-100 version please refer to TI-S24-71 & TI-S24-72

For smart positioner please refer to TI-P706-01, TI-P706-04 and TI-P707-02


For pneumatic positioners please refer to TI-P704-01

For electro-pneumatic positioners please refer to TI-P703-01 and TI-P703-03

## Materials - DN125 to DN300 (6" to 12")

Body material	Type	No. Part	Material
Carbon steel	<b>KE43</b>	1 Body	Cast steel BS EN 10213 GP 240GH+N (1.0619N)
		2 Bonnet	Cast steel BS EN 10213 GP 240GH+N (1.0619N)
	<b>KEA43</b>	1 Body	Cast steel ASTM A216 WCB
		2 Bonnet	Cast steel ASTM A216 WCB
Stainless steel	<b>KE63</b>	1 Body	Stainless steel EN 10213 (1.4408)
		2 Bonnet	Stainless steel EN 10213 (1.4408)
	<b>KEA63</b>	1 Body	Stainless steel ASTM A351 CF8M
		2 Bonnet	Stainless steel ASTM A351 CF8M
SG iron	<b>KE73</b>	1 Body	SG iron EN-GJS-400-18-LT
		2 Bonnet	SG iron EN-GJS-400-18-LT


**DN125  
unbalanced valve**

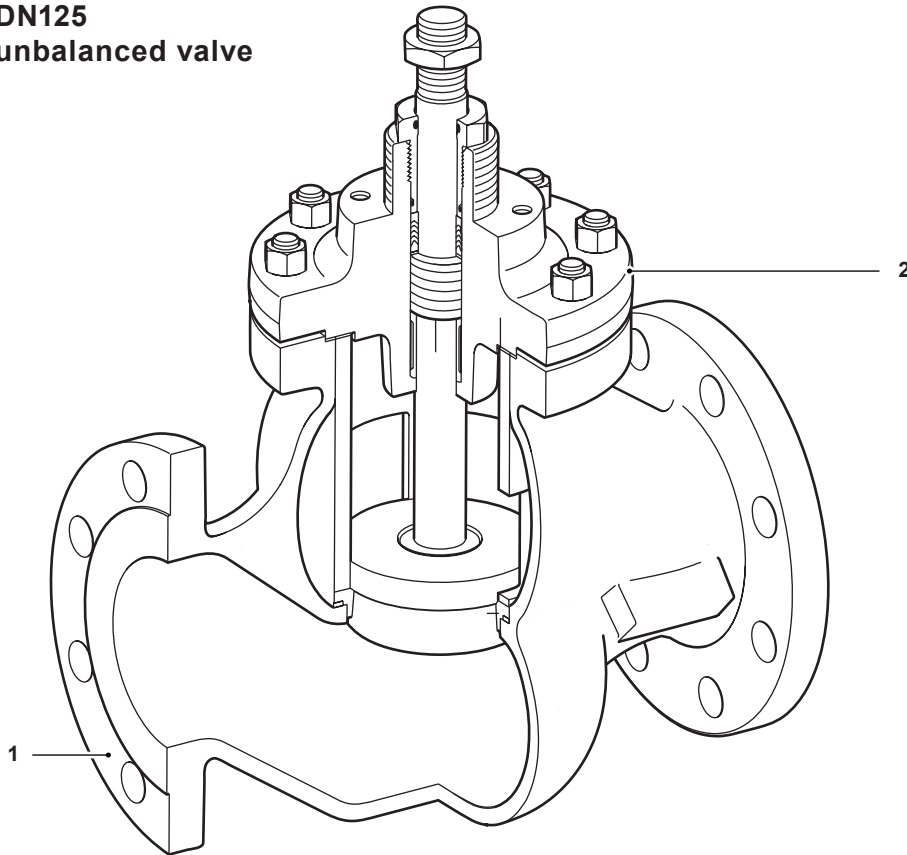


## Materials - DN125 to DN300 (6" to 12") (continued)

Body material	Type	No. Part	Material			
All versions	3	Plug and stem assembly	All others	Stainless steel	AISI 431	
			KE63	Stainless steel	AISI 316L	
			Seating version W	Stellite™ 6		
	4	Cage		Stainless steel		
	6	Valve seat ring	Seating version T	Stainless steel	AISI 431 S29	
			Seating versions P	PEEK		
			All others	Stainless steel	Stellite™ 6	
	9	Bearing		Stellite™		
	10	Spacer (not used in DN125 valves)		Stainless steel		
	11	Gland nut		Stainless steel	AISI 416	
	14	Washer		Stainless steel	AISI 316L	
	15	Bonnet gasket		Stainless steel/graphite		
	16	Seat gasket		Stainless steel/graphite		
	20	Stem nut		Stainless steel	AISI 316	
	All versions	21	Standard bonnet nut	KE43	Carbon steel	BS EN ISO 898-1 Grade 8.8
				KE63	Stainless steel	A2-80
				KE73	Carbon steel	BS EN ISO 898-1 Grade 8.8
				KEA43	Carbon steel	ASTM A194 2H
				KEA63	Stainless steel	ASTM A194 8M
			High temperature bonnet nut		Stainless steel	DIN ISO 3506 A2
22		Standard stud	KE43	Carbon steel	BS EN ISO 898-1 Grade 8.8	
			KE63	Stainless steel	A2	
			KE73	Carbon steel	BS EN ISO 898-1 Grade 8.8	
			KEA43	Carbon steel	ASTM A193 B7	
			KEA63	Stainless steel	ASTM A193 B8M2	
				High temperature bonnet nut		Stainless steel
				KE73		
PTFE gland versions	8	Spring		Stainless steel		
	12	Chevron packing set		PTFE		
	17	Stem 'O' ring		Viton™		
	18	Bonnet 'O' ring		Viton™		
High temperature gland versions	26	Gland packing		Graphite		
Balanced versions	3a	Plug and stem assembly		Stainless steel		
	29	Cage		Stainless steel		
	31	Balanced seal		Graphite		

**DN125  
unbalanced valve**

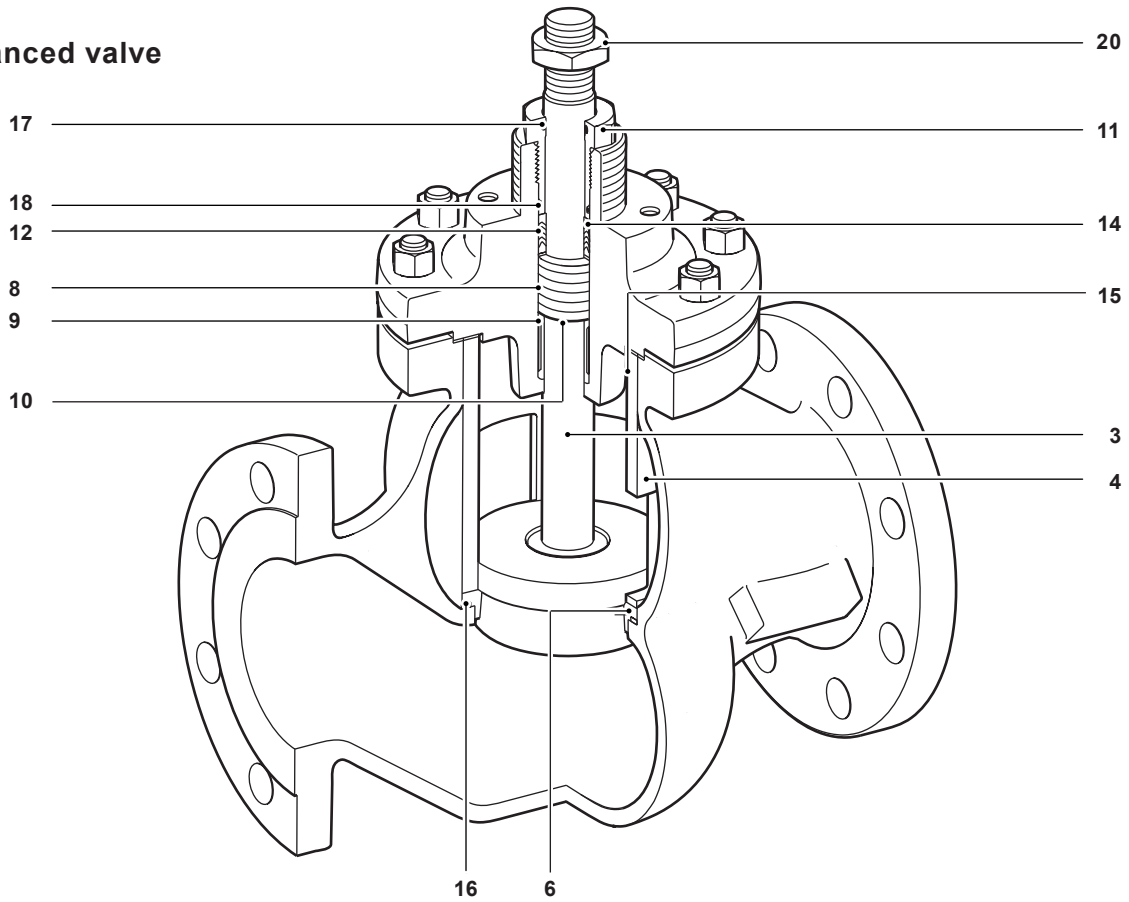

**DN125  
balanced valve**

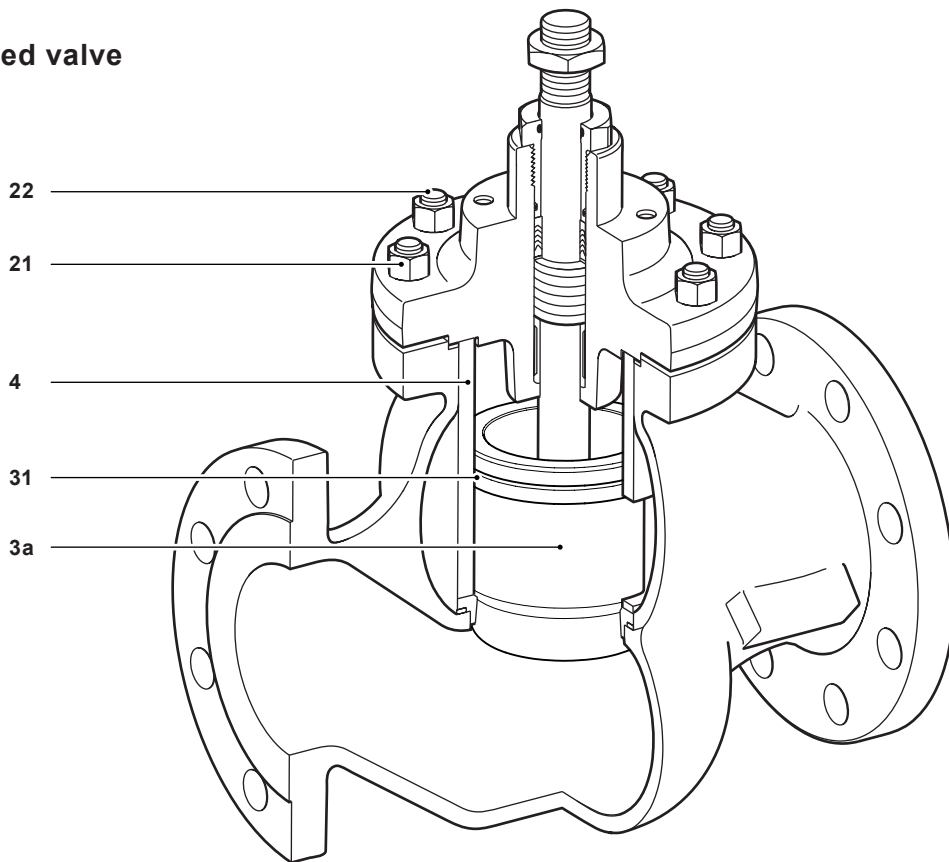

## Kv values

Valve size		DN125	DN150	DN200	DN250	DN300	
Standard trim	Full port	Equal %	245	370	580	700	1 000
		Linear	260	390	640	780	1 100
		Fast opening	260	390	640	780	1 100
	Reduced trim 1	Equal %	200	287	370	580	700
		Linear	200	287	550	640	780
	Reduced trim 2	Equal %	100	132	232	370	580
		Linear	100	132	232	550	640
	Reduced trim 3	Equal %	63	103	163	232	370
		Linear	63	103	163	232	550
	Reduced trim 4	Equal %				163	232
		Linear				163	232
	Reduced trim 5	Equal %					163
		Linear					163

**Note:** For low noise and anti-cavitation Kv please see TI-S24-59


## Cv (US) values

$$Cv (US) = Cv (UK) \times 1.2009$$

Valve size		DN150	DN200	DN250	DN300	
Standard trim	Full port	Equal %	433	679	809	1 156
		Linear	456	749	902	1 272
		Fast opening	456	749	902	1 272
	Reduced trim 1	Equal %	336	433	670	809
		Linear	336	636	740	902
	Reduced trim 2	Equal %	154	271	428	670
		Linear	154	271	636	740
	Reduced trim 3	Equal %	120	191	268	428
		Linear	120	191	268	636
	Reduced trim 4	Equal %			188	268
		Linear			188	268
	Reduced trim 5	Equal %				188
		Linear				188

**Note:** For low noise and anti-cavitation Cv please see TI-S24-59

## Pressure / temperature limits - KE43 (Carbon steel)

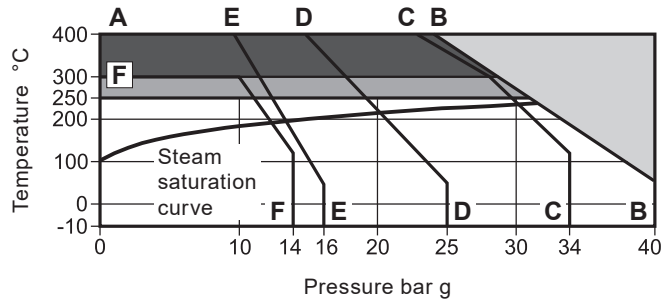

- The product **must not** be used in this region.
- High temperature packing is required for use in this region.
- High temperature bolting and packing is required for use in this region

- A - B** Flanged EN 1092 PN40.
- A - C** Flanged JIS/KS 20K.
- A - D** Flanged EN 1092 PN25.
- A - E** Flanged EN 1092 PN16.
- A - F** Flanged JIS/KS 10K.


### Notes:

1. Where the process fluid temperature is sub-zero and the ambient temperature is below +5 °C, the external moving parts of the valve and actuator must be heat traced to maintain normal operation.
2. When selecting a valve with a bellows sealed bonnet, the pressure / temperature limits of the bellows must be read in conjunction with the valve pressure / temperature limits shown in table below.

Body design conditions		PN40
Maximum design pressure		40 bar g @ 50 °C
Maximum differential pressure design	Full PEEK seat (P)	19 bar
Maximum design temperature		400 °C
Minimum design temperature		-10 °C
	PEEK soft seat (P)	220 °C
	Standard packing PTFE chevron	250 °C
Maximum operating temperature	Extended bonnet (E) with PTFE chevron	
	High temperature packing (H)	400 °C
	Extended bonnet (E) with graphite packing	

**Note:** We recommend that an extended bonnet (E) with graphite packing is used where valve operation is above 300 °C.

## Pressure / temperature limits - KE63 (Stainless steel)

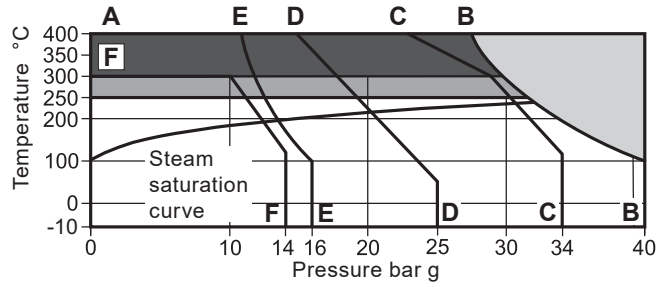

- The product **must not** be used in this region.
- High temperature packing is required for use in this region.
- High temperature bolting and packing is required for use in this region

- A - B** Flanged EN 1092 PN40.
- A - C** Flanged JIS/KS 20K.
- A - D** Flanged EN 1092 PN25.
- A - E** Flanged EN 1092 PN16.
- A - F** Flanged JIS/KS 10K.

### Notes:


1. Where the process fluid temperature is sub-zero and the ambient temperature is below +5 °C, the external moving parts of the valve and actuator must be heat traced to maintain normal operation.
2. When selecting a valve with a bellows sealed bonnet, the pressure/temperature limits of the bellows must be read in conjunction with the valve pressure/temperature limits shown in table below.

Body design conditions		PN40
Maximum design pressure		40 bar g @ 50 °C
Maximum differential pressure design	Full PEEK seat (P)	19 bar
Maximum design temperature		400 °C
Minimum design temperature		-10 °C
		PEEK soft seat (P)
		220 °C
		Standard packing PTFE chevron
		250 °C
Maximum operating temperature	Extended bonnet (E) with PTFE chevron	
	High temperature packing (H)	
	400 °C	
		Extended bonnet (E) with graphite packing

**Note:** We recommend that an extended bonnet (E) with graphite packing is used where valve operation is above 300 °C.



## Pressure / temperature limits - KE73 (SG iron)

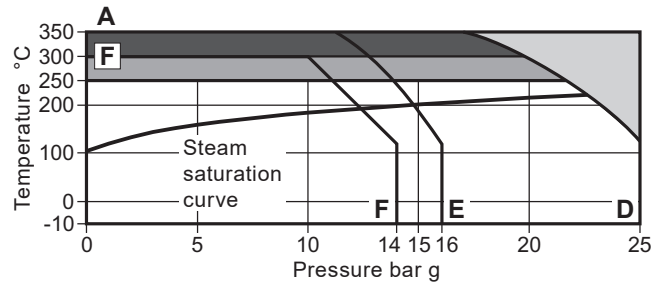

- The product **must not** be used in this region.
- High temperature packing is required for use in this region.
- High temperature bolting and packing is required for use in this region

**A - D** Flanged EN 1092 PN40.

**A - E** Flanged EN 1092 PN16.

**A - F** Flanged JIS/KS 10.


### Notes:

1. Where the process fluid temperature is sub-zero and the ambient temperature is below +5 °C, the external moving parts of the valve and actuator must be heat traced to maintain normal operation.
2. When selecting a valve with a bellows sealed bonnet, the pressure/temperature limits of the bellows must be read in conjunction with the valve pressure/temperature limits shown in table below.

Body design conditions		PN25
Maximum design pressure		25 bar g @ 120 °C
Maximum differential pressure design	Full PEEK seat (P)	19 bar
Maximum design temperature		350 °C
Minimum design temperature		-10 °C
		PEEK soft seat (P)
		220 °C
		Standard packing PTFE chevron
		250 °C
Maximum operating temperature	Extended bonnet (E) with PTFE chevron	
	High temperature packing (H)	350 °C
	Extended bonnet (E) with graphite packing	

**Note:** We recommend that an extended bonnet (E) with graphite packing is used where valve operation is above 300 °C.

## Pressure/temperature limits - KEA43 (Carbon steel)

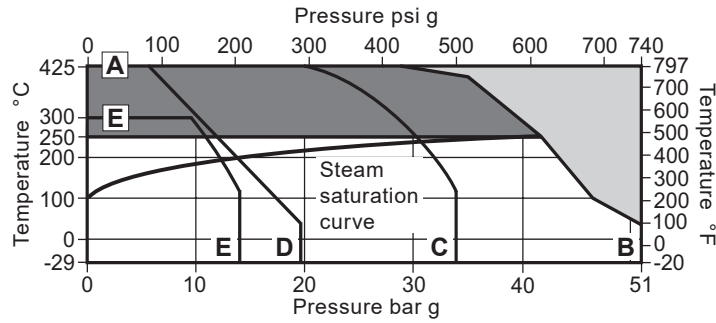

- The product **must not** be used in this region.
- Graphite stem sealing is required for use in this region

- A - B** Flanged ASME 300.
- A - C** Flanged JIS/KS 20.
- A - D** Flanged ASME 150.
- E - E** Flanged JIS/KS 10.


### Notes:


1. Where the process fluid temperature is sub-zero and the ambient temperature is below +5 °C, the external moving parts of the valve and actuator must be heat traced to maintain normal operation.
2. When selecting a valve with a bellows sealed bonnet, the pressure/temperature limits of the bellows must be read in conjunction with the valve pressure/temperature limits shown above.
3. As standard the KEA, KFA, KLA series two-port control valves are supplied with the PTFE stem sealing option.

Body design conditions		ASME 150 and ASME 300	
Maximum design pressure	ASME 150	19.6 bar g @ 38 °C	(284 psi g @ 100 °F)
	ASME 300	51.1 bar g @ 38 °C	(740 psi g @ 100 °F)
Maximum differential pressure design	Full PEEK seat (P)	19 bar	
Maximum design temperature		425 °C	(800 °F)
Minimum design temperature		-29 °C	(-20 °F)
Maximum operating temperature	PEEK soft seat (P)	220 °C	(428 °F)
	Standard packing PTFE chevron	250 °C	(482 °F)
	Extended bonnet (E) with PTFE chevron		
	Graphite packing (H)		
	Extended bonnet (E) with graphite packing	425 °C	(800 °F)

**Note:** We recommend that an extended bonnet (E) with graphite packing is used where valve operation is above 300 °C (572 °F).

## Pressure/temperature limits - KEA63 (Stainless steel)

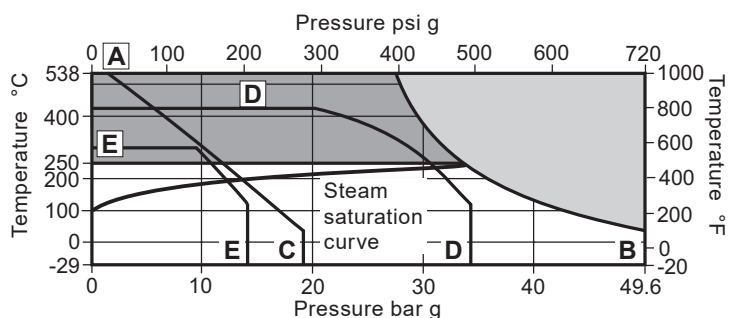

 The product **must not** be used in this region.

 Graphite stem sealing is required for use in this region

**A - B** Flanged ASME 300.

**A - C** Flanged JIS/KS 20.

**D - D** Flanged ASME 150.

**E - E** Flanged JIS/KS 10.

### Notes:


1. Where the process fluid temperature is sub-zero and the ambient temperature is below +5 °C, the external moving parts of the valve and actuator must be heat traced to maintain normal operation.
2. When selecting a valve with a bellows sealed bonnet, the pressure/temperature limits of the bellows must be read in conjunction with the valve pressure/temperature limits shown above.
3. As standard the KEA, KFA, KLA series two-port control valves are supplied with the PTFE stem sealing option.

Body design conditions		ASME 150 and ASME 300	
Maximum design pressure	ASME 150 (6" to 8" only)	19.6 bar g @ 38 °C	(275 psi g @ 100 °F)
	ASME 300	49.6 bar g @ 38 °C	(720 psi g @ 100 °F)
Maximum differential pressure design	Full PEEK seat (P)	19 bar	
Maximum design temperature		538 °C	(1000 °F)
Minimum design temperature		-29 °C	(-20 °F)
Maximum operating temperature	PEEK soft seat (P)	220 °C	(428 °F)
	Standard packing PTFE chevron	250 °C	(482 °F)
	Extended bonnet (E) with PTFE chevron		
	Graphite packing (H)	538 °C	(1000 °F)
	Extended bonnet (E) with graphite packing		

**Note:** We recommend that an extended bonnet (E) with graphite packing is used where valve operation is above 300 °C (572 °F).

**Dimensions** for the **Spira-trol™ two-port control valve** approximate in mm and (inches)

Valve size	Flanged							D	E Thread	F Extended bonnet
	KE valves			KEA valves						
	PN16 PN25 PN40	A1		C1	A1		C1			
		JIS / KS			KS 10 ASME 150	KS 20 ASME 300				
10	20									
<b>DN125 (5")</b>	400	403	425	257						538 (21 1/8")
<b>DN150 (6")</b>	480	451	473	275	451 (17 3/4")	473 (18 5/8")	279 (11")			556 (21 7/8")
<b>DN200 (8")</b>	600	543	568	341	543 (21 3/8")	568 (22 3/8")	343 (13 1/2")	125(4 7/8")	M30	621 (24 1/2")
<b>DN250 (10")</b>	730	673	708	344	673	708	344 (13 1/2")			622 (24 1/2")
<b>DN300 (12")</b>	850	737	775	355	737	775	355 (14")			634 (25")

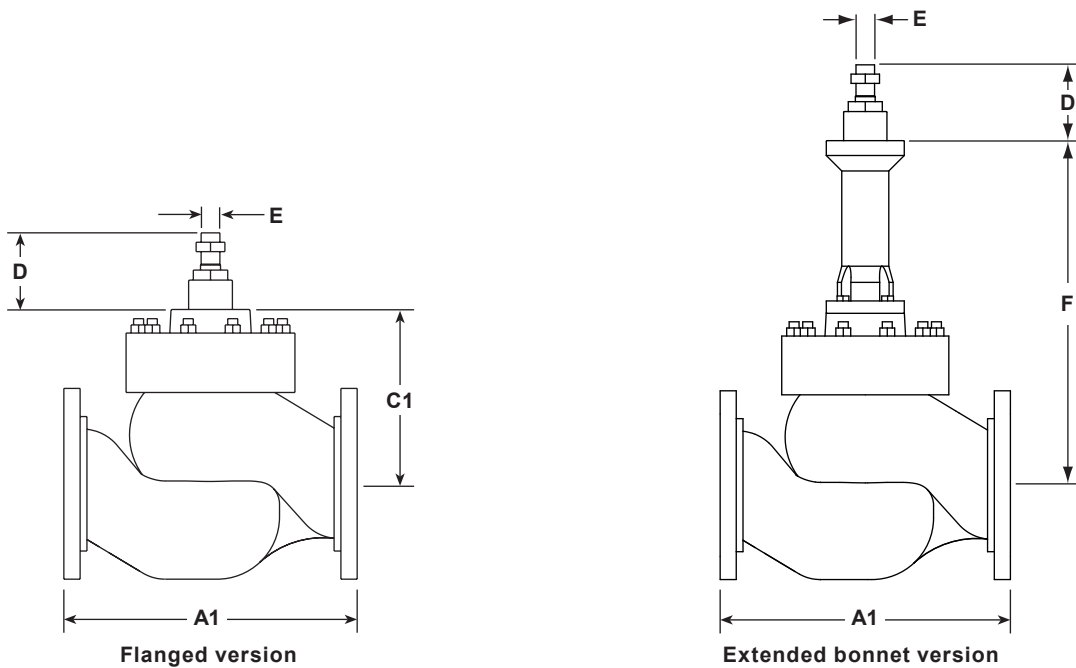


**Weights** for the **Spira-trol™ two-port control valve** approximate in kg (and lbs)

Valve size	KE valves			KEA valves		Additional extended bonnet	Additional balanced
	KE43	KE63	KE73	KEA43	KEA63		
<b>DN125 (5")</b>	81	81	81			16 (35)	2 (4.4)
<b>DN150 (6")</b>	121	121	121	130 (286)	130 (286)	16 (35)	3 (7)
<b>DN200 (8")</b>	210	210	210	210 (462)	210 (462)	16 (35)	10 (22)
<b>DN250 10")</b>	228			242 (533)		16 (35)	10 (22)
<b>DN300 12")</b>	451			465 (1025)		16 (35)	16 (35)

**Dimensions/weights** for the **PN actuator range** approximate in mm and kgs (inches and lbs)

Actuator range and variants	F		G		H		J		Weight			
	mm	inches	mm	inches	mm	inches	mm	inches	Actuator		With handwheel	
									kg	lbs	kg	lbs
PN1500 and PN2500	405	16"	1 114	46"					55	121.00		
PN1600 and PN2600	465	18 5/16"	1 116	46"					70	154.00		
PN9400E	732	28 3/4"	465	18 1/3"					60	132.00		
PN9400R												
TN2277E	532	21"	863	34"	330	13"	330	13"	116	255.00	+21.00	+46.00
TN2277NDA	532	21"	863	34"					98	216.00		

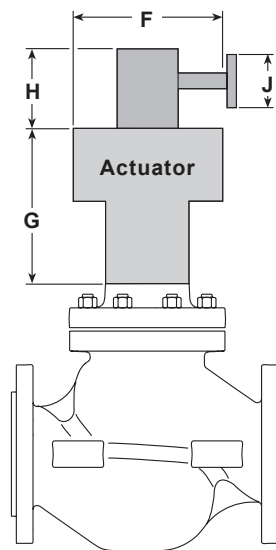

**Dimensions/weights** for the **EL and AEL actuator ranges** approximate in mm and kgs (and in inches and lbs)

Actuator range	F		G		Weight	
	mm	inches	mm	inches	kg	lbs
AEL78	216	8.5"	657	26"	19	42

## Spare parts

### Spira-trol™ two-port control valve Balanced and unbalanced DN125 to DN300 and 6" to 12"

The spare parts available are shown in solid outline. Parts drawn in a grey line are not supplied as spares.

**Note:** When placing an order for spare parts please specify clearly the full product description as found on the label of the valve body, as this will ensure that the correct spare parts are supplied.

#### Available spares - K series

<b>Gasket set</b> Non bellows sealed	<b>Balanced</b>	<b>A, B, G</b>
	<b>Unbalanced</b>	<b>B, G</b>
<b>Stem seal kit</b>	<b>PTFE chevrons</b>	<b>C3</b>
	<b>Graphite packing conversion kit (DN125 to DN300)</b>	<b>C4</b>
	<b>Graphite seal set</b>	<b>C5</b>
<b>Plug stem and seat kit</b>	<b>Balanced</b> (No gaskets supplied)	<b>A, D, E</b>
	<b>Unbalanced</b> (No gaskets supplied)	<b>D, E</b>


#### How to order spares

Always order spares by using the description given in the column headed 'Available spares', and state the size and type of valve including the full product description of the product.

**Example:** 1 - PTFE stem seal kit for a Spirax Sarco DN150 Spira-trol™ two-port KE43 PTSBSS.2 Kvs 370 control valve.

#### How to fit spares

Full fitting instructions are given in the Installation and Maintenance Instructions supplied with the spare.

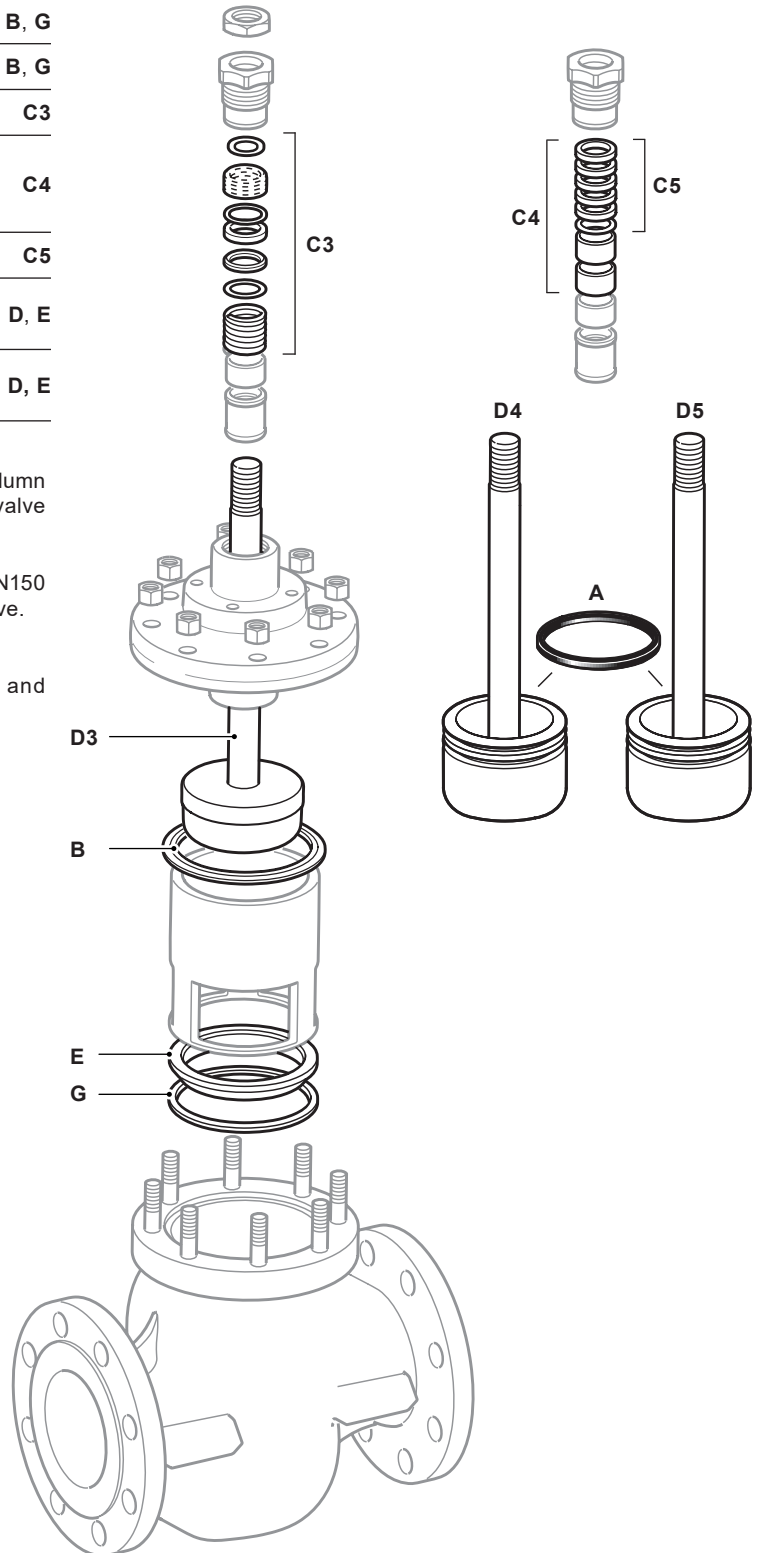

## Spira-trol™ selection guide:

<b>Valve size</b>	EN standard = DN125, DN150, DN200, DN250 and 300 ASME standard = 6", 8", 10" and 12"	<b>DN150</b>
<b>Valve series</b>	K = K series 2-port control valve	<b>K</b>
<b>Valve characteristic</b>	E = Equal percentage F = Fast opening L = Linear	<b>E</b>
<b>Flange type</b>	A = ASME Blank = EN (PN)	<b>Blank</b>
<b>Flow</b>	Blank = under T = over	<b>Blank</b>
<b>Body material</b>	4 = Carbon steel 6 = Stainless steel 7 = SG iron	<b>4</b>
<b>Connections</b>	3 = Flanged	
<b>Stem sealing</b>	H = Graphite P = PTFE V = PTFE for vacuum service	
<b>Seating</b>	P = Full PEEK (not available in DN300) T = 431 stainless steel W = 316L with stellite 6 facing	
<b>Type of trim</b>	A1 = 1 stage anti-cavitation A2 = 2 stage anti-cavitation P1 = 1 stage low noise cage P2 = 2 stage low noise cage P3 = 3 stage low noise cage S = Standard trim	<b>S</b>
<b>Trim balancing</b>	B = Balanced U = Unbalanced	<b>U</b>
<b>Bonnet type</b>	E = Extended S = Standard	<b>S</b>
<b>Bolting</b>	H = High temperature S = Standard	<b>S</b>
<b>Finish</b>	Blank = Standard	
<b>Series</b>	2 = .2	<b>.2</b>
<b>Kvs</b>	To be specified	<b>Kvs 370</b>
<b>Connection type</b>	To be specified	<b>Flanged PN40</b>

### Selection example:

DN150	-	K	E	4	3	P	T	S	U	S	S		.2	-	Kvs 370	-	Flanged PN40
-------	---	---	---	---	---	---	---	---	---	---	---	--	----	---	---------	---	--------------

### How to order

**Example:** 1 off Spirax Sarco Spira-trol™ DN150 KE43PTSUSS.2 Kvs 16 two-port control valve having flanged PN40 connections.