



VHT Vent Heads

Description

Spirax Sarco VHT vent heads are designed for fitting to vertical open ended steam vent pipes. The vent head will discharge dry steam safely to the atmosphere, avoiding the possibility of discomfort or even injury to personnel and material damage to buildings.

The vent head incorporates an internal baffle to separate entrained water from the steam.

Principle features


- Efficient separation.
- Stainless steel body for long maintenance free life.
- A simple and effective vent head for general applications.

Applications

Vent heads are ideal for use on blowdown vessels, condensate vessels, boiler feedtanks, hot water storage tanks etc.

Warning: Vent heads must not be used for safety valve outlets.

Vent heads are selected to be the same nominal size as the vent pipe.

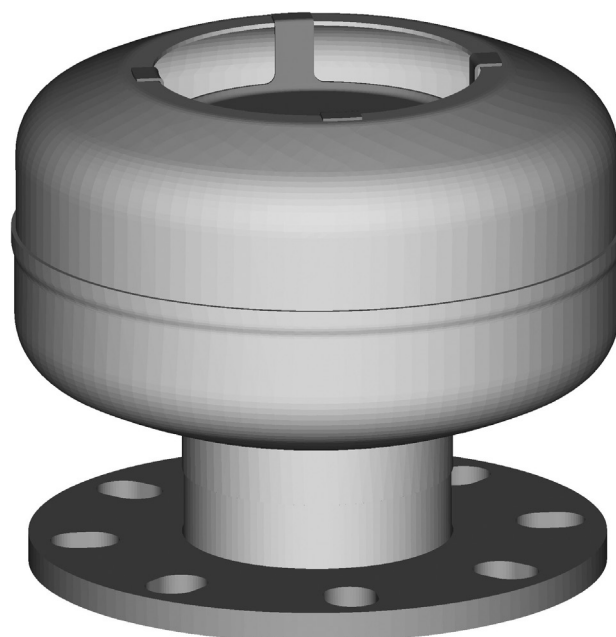

Sizes and pipe connections



Description	Size	Inlet connection
VHT2	DN50 2"	Screwed BSP
		Screwed NPT
VHT3	DN80 3"	Screwed BSP
		Screwed NPT
		Flanged EN 1092 PN16 or ASME 150
VHT4	DN100 4"	Flanged EN 1092 PN16 or ASME 150
VHT6	DN150 6"	Flanged EN 1092 PN16 or ASME 150
VHT8	DN200 8"	Flanged EN 1092 PN16 or ASME 150
VHT10	DN250 10"	Flanged EN 1092 PN16 or ASME 150
VHT12	DN300 12"	Flanged EN 1092 PN16 or ASME 150

Materials

Body	Austenitic stainless steel 304L
Flanges	Carbon steel, black electrophoretic coating

Dimensions/weights (approximate) in mm (inches) and kg (lbs)

Description	Size	Inlet connection	A	B	C	Weight
VHT2	DN50	2"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT3	DN80	3"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT4	DN100	4"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT6	DN150	6"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT8	DN200	8"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT10	DN250	10"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight
VHT12	DN300	12"	Screw	Screw	Screw	Weight
			Screw	Screw	Screw	Weight

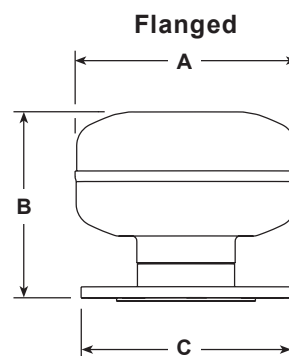

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions supplied with the product.

Installation note

Installation of the screwed and flanged vent heads is relatively straight forward. The flanged vent heads have a lightweight flange drilled to suit both the PN and ASME flange standards.

Disposal

The product is recyclable. No ecological hazard is anticipated with the disposal of this product providing due care is taken.

How to specify

Spirax Sarco type VHT with austenitic stainless steel construction, screwed / carbon steel flanges & internal baffle.

How to order

Example: 1 off Spirax Sarco DN100 VHT4 vent head having a flanged EN 1092 PN16 inlet connection.