



Spirax EasiHeat™ HTG (Steam Side Control) EN Heating System Compact Heat Transfer Solution

Heating system

Our Spirax EasiHeat™ HTG incorporating SIMS technology is a complete, compact and ready-to-use steam to water heat transfer solution that delivers superior energy efficient performance. For applications with stable load conditions such as closed circuit heating applications. Spirax EasiHeat™ HTG can help you lower costs, tackle waste and mitigate your environmental impact by reducing your CO₂ emissions and carbon footprint, making a positive change towards a more sustainable future.

Principal features and benefits:

- Compact heat transfer solution incorporating SIMS technology.
- Energy monitoring, CO₂ emission, Communications, Remote monitoring and SMS or E-mail of system alarms.
- Produces hot water for heating and process.
- Designed for sub-cooling condensate to provide high efficiency.
- Maintains a stable temperature.
- Guaranteed performance.
- Fully assembled and tested ready to install.
- Options to suit all applications.



Heat exchanger

One of the components that guarantees system performance is the heat exchanger, which is precisely engineered to match the specific duty requirements.

With a high efficiency and low volume to pressure ratio. The plate and frame heat exchanger ensures reduced inspection requirements whilst being fully maintainable and expandable.

Temperature control

The steam flowrate is modulated to exactly match the heat demand. The control valve is pneumatically or electrically actuated and the system uses a fast response Pt100 temperature sensor and PLC controller for precise control. The system can incorporate an energy monitoring system to measure energy usage.



Control panel

The Spirax EasiHeat™ HTG now features our new innovative control system incorporating SIMS technology, delivering increased monitoring and communications.

A colour touch screen provides ease of use and clear visual access to all system parameters and access to energy data.

Metering

A key component guaranteeing accurate measurement of energy usage, CO² emissions and cost control. The TVA flowmeter is specifically designed for large turndown on steam applications.

Condensate management

Spirax Sarco's range of combined mechanical fluid pump and steam trap units provide the total solution to all stall conditions, by removing condensate under all operating conditions.

Pipework

All pipework is correctly sized for the application and is fabricated using modern welding techniques, approved welders and weld procedures. Flanged products are used where possible for reliability and easy maintenance.

Materials

Steam and condensate pipework	Carbon steel
Steam control valve and condensate pump-trap	SG iron
Secondary pipework, circulation valve and pump	Stainless steel

Pressure and temperature limits

Pipework design	PN16
Maximum saturated steam supply pressure	10 bar a
Maximum secondary pressure	10 bar a
Maximum secondary temperature	105 °C
Maximum gasket temperature	180 °C

Electrics and pneumatics

All control equipment is pre-wired and piped ready for connection to the air supply and power source.

Electrical supply	Power supply	110-240 Vac/50-60 Hz
	Supply fuse	5A (T)
Actuators	Electric	24 Vac/50-60Hz
	Pneumatic	4 to 6 bar g


Support frame

The Spirax EasiHeat™ HTG heating system is delivered pre-assembled on a compact frame and baseplate ready to move with a fork lift truck to the position of installation. Optionally, the unit can be fitted with wheels for ease of moving when supplied.

Dimensions (approximate) in mm

Heat load (kW)		Type	Valve actuation	Maximum dimensions			Piping connections DN		
Min	Max			H	L	W	Steam	Condensate	
							Pump trap	Steam trap	
50	191	EHHSC1	EL and PN	1324	1625	825	DN50	DN40	DN25
191	299	EHHSC2	EL and PN	1344	1635	825	DN50	DN40	DN25
299	640	EHHSC3	EL and PN	1378	1625	825	DN50	DN40	DN25
640	753	EHHSC4	EL and PN	1381	1625	825	DN50	DN40	DN40
753	815	EHHSC5	EL and PN	1382	1625	825	DN50	DN50	DN40
-	-	EHHSC6	EL and PN	1460	1675	825	DN50	DN50	DN40

- Notes:**
1. The height of the system will increase by 25 mm if the wheels are fitted.
 2. The heat load has been based on a steam inlet pressure of 5 bar g and 1 bar backpressure (50 kPa pressure drop).

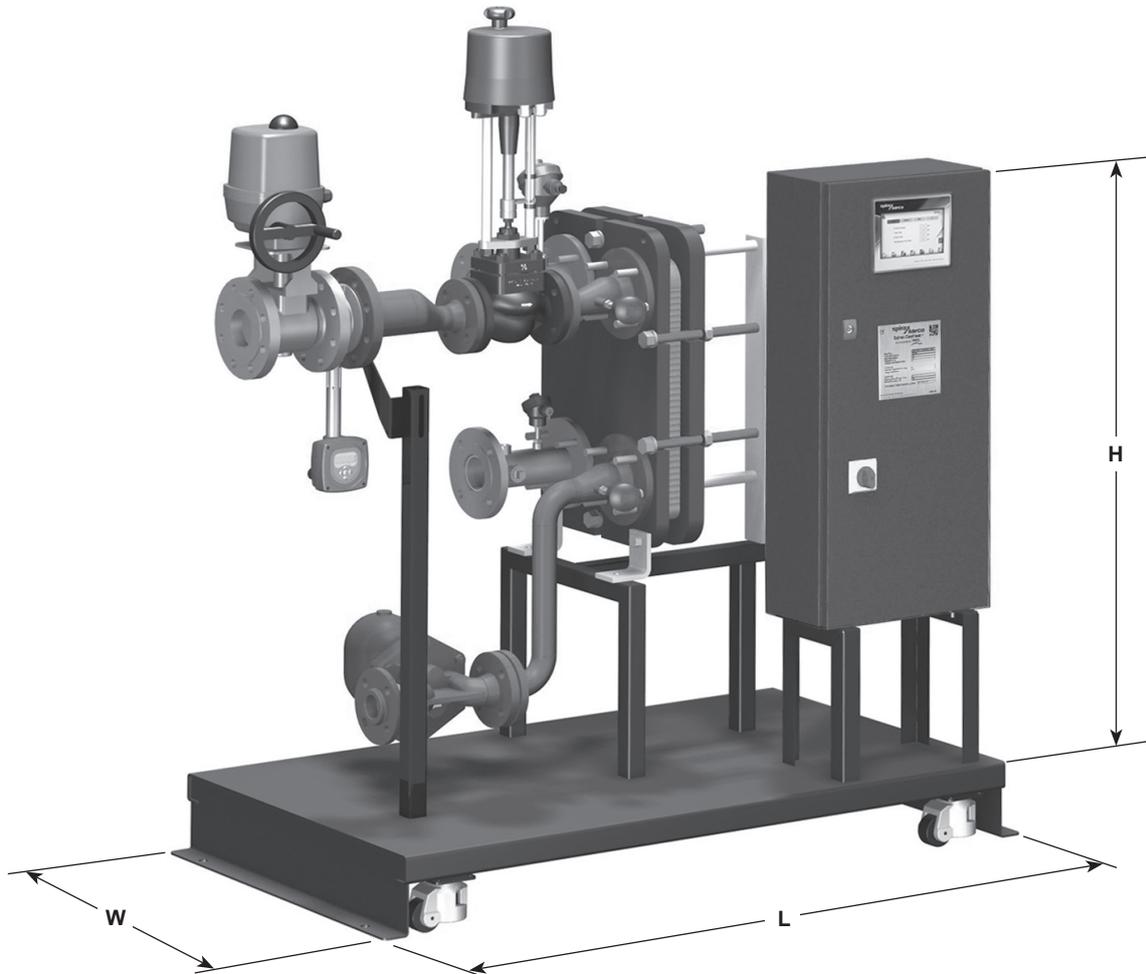

Spirax EasiHeat™ HTG nomenclature

	Building heating unit	EHHSC = Spirax EasiHeat™ HTG steam side control	EHHSC
Compulsory selection	Control valve size	1 = DN20	2
		2 = DN25	
		3 = DN32	
		4 = DN40	
		5 = DN50	
		6 = DN65	
	Control valve trim	L = Low noise trim	L
	Pressure vessel code	P = PED	P
	Actuation	EL3 = Electric spring return	EL4
		EL4 = Electric super capacitor	
PN = Pneumatic			
Condensate removal	ST = Steam trap	ST	
	PT = Pump trap		
	PTHC = Pump trap high capacity		
Mechanical options	High limit	HL = Integrated high limit	HL
		IHL = Independent high limit	
	High limit actuation (EL4 only)	B = Battery back-p	C
		C = Super capacitor	
	Isolation	V1 = Ball valve	V2
		V2 = BSA	
		V3 = DBB3	
	Gasket material	G1 = EPDMP	G1
		G2 = Heatseal	
		G3 = WRAS FKMFF (UK only)	
G4 = WRAS EPDMFF (UK only)			
Extras	W = Wheels	W	
	S = EN 12828 safety option		
Panel options	Control panel	T2 = SIMS technology touch screen	T2
		P2 = Process controller	
	Energy monitoring	E = With energy monitoring	E
	Remote access	R1 = Level 1 – SMS and E-mail	R2
		R2 = Level 2 – Full web access	
		R3 = Level 3 – SMS + Remote	
Communications	C1 = Modbus RTU	C2	
	C2 = BACnet MS/TP		
	C3 = Modbus TCP/IP		
	C4 = DeviceNet		
	C5 = CANopen		
	C6 = BACnet IP		
	C7 = Profibus		

Spirax EasiHeat™ HTG nomenclature example:

EHHSC	2	L	P	EL4	ST	-	HL	C	V2	G1	W	-	T2	E	R2	C2
-------	---	---	---	-----	----	---	----	---	----	----	---	---	----	---	----	----

Typical specification

The building heating unit shall be a Spirax EasiHeat™ HTG compact heat transfer system complete with PLC functionality and SIMS technology to provide energy monitoring and remote access. The system will be pre-assembled and mounted on a compact frame with either pneumatic or electric control option.

In order to meet EU standards for Temperature Control Devices and Temperature Limiters For Heat Generating Systems, the selection of Independent High Limit (IHL) control is a compulsory selection for packages installed within the EU.

How to order

All systems are designed for the required heat load with controls to suit the application. The best way of ensuring that we have all the necessary information for quotation and manufacture is to complete our enquiry data sheet. Copies can be supplied on request and special requirements should be detailed.