



RIM20 Rotor Insertion Flowmeter

Description

The RIM20 multivariable insertion turbine flowmeter utilizes **three primary sensing elements** to measure the mass flowrate of steam, liquids and gases:

- Turbine velocity sensor,
- RTD temperature sensor,
- Solid-state pressure transducer.

Principle of operation

Insertion turbine flowmeters measure flow of liquid, gas, and steam by detecting the frequency of rotation of the turbine blades. According to the proven laws of physics, the frequency at which the turbine rotates is directly proportional to the flow velocity.

Insertion turbine flowmeters measure flow by detecting the local velocity at a strategically located position within the pipe. The RIM20 detects the frequency within the sensor head. It uses the local velocity, along with other parameters such as fluid type, pipe size, and Reynolds Number to calculate the average pipe velocity, and consequently, the volumetric flowrate.

RIM20 range and benefits

The **RIM20-V** delivers a direct reading of volumetric flowrate, generally the most cost-effective solution for liquid flow monitoring, in applications ranging from general water flows to hydrocarbon fuel flow measurement.

The **RIM20-VT** integrates a precision 1000 Ω platinum RTD temperature sensor that can be used to calculate and output a compensated mass reading. This device is typically used to measure flowrates of saturated steam.

The **RIM20-VTP** offers you flow computer functionality in a compact field device. This multivariable instrument incorporates temperature and pressure sensors to provide an instantaneous reading of the compensated mass flowrate of gases, liquids and steam. In addition to outputs for totalized mass and alarm settings, the field-configurable electronics deliver up to three analogue 4-20 mA outputs of five process measurements, including volumetric flowrate, mass flowrate, pressure, temperature and density.


The **RIM20-EM** Energy Monitoring option permits real-time calculation of energy consumption for a facility or process. The flowmeter can be programmed to measure steam, hot water or chilled water. The RIM20-VTP flowmeter monitors one side of the process, either sent or returned, and uses the input from a second separate temperature sensor on the opposite leg of the process to calculate the change in energy. Selectable energy units include BTUs, joules, calories, Watt-hours, Megawatt-hours and Horsepower-hours. The local or remote electronics indicate two temperatures, delta T, mass total and energy total.

Compliance

- Electromagnetic Compatibility Directive
- Low Voltage Directive

Sizes

Insertion style mounting permits installation in any pipe DN50 (2") and greater.

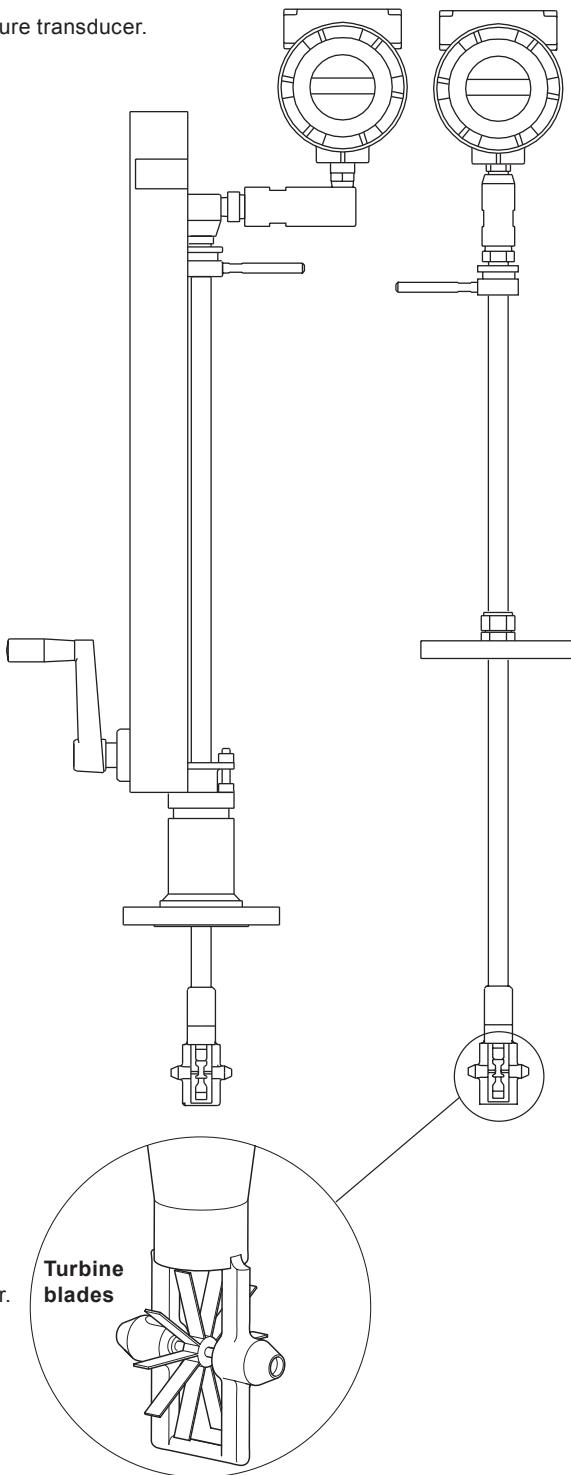

Technical data


Wetted materials	316L, 302, and 17-4PH, and 18-8 stainless steel, tungsten carbide, sapphire, plus: <ul style="list-style-type: none"> • DuPont Teflon® based thread sealant on models with pressure transducer • DuPont Teflon® packing on standard temperature models with packing gland • Graphite based packing on high temperature models with packing gland 				
Application	Any gas, liquid or steam compatible with 316L stainless steel and other listed wetted materials. Not recommended for multi-phase fluids				
Temperature Process	S option - Standard -55 °C to +232 °C (-67 °F to +450 °F) H option - High -267 °C to +454 °C (-448 °F to +850 °F)				
Temperature	Ambient Operating -40 °C to +60 °C (-40 °F to +140 °F) Storage -40 °C to +85 °C (-40 °F to +185 °F)				
LVD	Electrical Safety EN61010-1:2010				
Environmental	Overvoltage Category II Pollution Degree 2				
EMC	Emissions Group 1, Class A (Suitable for Industrial Environments only) Immunity Suitable for Industrial Environments				
Enclosure	NEMA 4X, IP66				
Pressure transducer ratings			Full-scale operating pressure Maximum over-range pressure		
	2 bar a	30 psi a	4 bar a 60 psi a		
	7 bar a	100 psi a	14 bar a 200 psi a		
	20 bar a	300 psi a	41 bar a 600 psi a		
	34 bar a	500 psi a	69 bar a 1000 psi a		
	100 bar a	1500 psi a	175 bar a 2500 psi a		
Pressure ratings	Style connection	Connection / Rating			
	Compression fitting	2" Male NPT ASME Class 600			
		2" ASME B16.5 Class 150 or DN50 EN1092-1 PN16			
		2" ASME B16.5 Class 300 or DN50 EN1092-1 PN40			
		2" ASME B16.5 Class 600 or DN50 EN1092-1 PN63			
Pressure ratings	Packing gland	2" Male NPT ASME Class 300			
		2" ASME B16.5 Class 150 or DN50 EN1092-1 PN16			
		2" ASME B16.5 Class 300 or DN50 EN1092-1 PN40			
	Packing gland and Permanent retractor	2" Male NPT ASME Class 600			
		2" ASME B16.5 Class 150 or DN50 EN1092-1 PN16			
		2" ASME B16.5 Class 300 or DN50 EN1092-1 PN40			
		2" ASME B16.5 Class 600 or DN50 EN1092-1 PN63			
Power requirements	DL option - 12 to 36 Vdc, 25 mA, 1 W maximum, Loop powered (single output)				
	DH option - 12 to 36 Vdc, 300 mA, 9 W maximum, (multiple outputs)				
	AC option - 100 to 240 Vac, 50/60 Hz line power, 5 W maximum (multiple outputs)				

Display	Alphanumeric 2 line x 16 character LCD digital display	
	Six pushbuttons for full field configuration	
	Pushbuttons can be operated with magnetic wand without removal of the enclosure covers	
	Display can be mounted in 90° intervals for better viewing	
Output signals	Analogue	4-20 mA
	Alarm	Solid state relay, 40 Vdc
	Totalizer pulse	50 millisecond pulse, 40 Vdc
	Volumetric or Loop powered mass	One analogue, one totalizer pulse, HART®, scaled frequency output
	Multivariable option 1	Up to three analogue signals, three alarms, one totalizer pulse, HART®, scaled frequency output
	Multivariable option 2	Modus RTU or BACnet MS/TP compatible process monitoring

Performance specifications

Accuracy	Mass flowrate accuracy for gas and steam based on 50-100% of pressure range			
Process variables	Liquids	Gas and steam	Repeatability	Stability over 12 months
Volumetric flowrate	± 1.2% of rate	± 1.5% of rate	± 0.1% of rate	± Negligible
Mass flowrate	± 1.5% of rate	± 2.0% of rate	± 0.2% of rate	± 0.2% of rate
Temperature	± 1.0 °C (± 2.0 °F)	± 1.0 °C (± 2.0 °F)	± 1.0 °C (± 2.0 °F)	± 0.5 °C (± 0.9 °F)
Pressure	± 0.3% of full-scale	± 0.3% of full-scale	± 0.05% of full-scale	± 0.1% of full-scale
Density	± 0.3% of reading	± 0.5% of reading	± 0.1% of reading	± 0.1% of reading
Response time	Adjustable from 1 to 100 seconds			

Dimensions and weights (approximate) in mm and inches

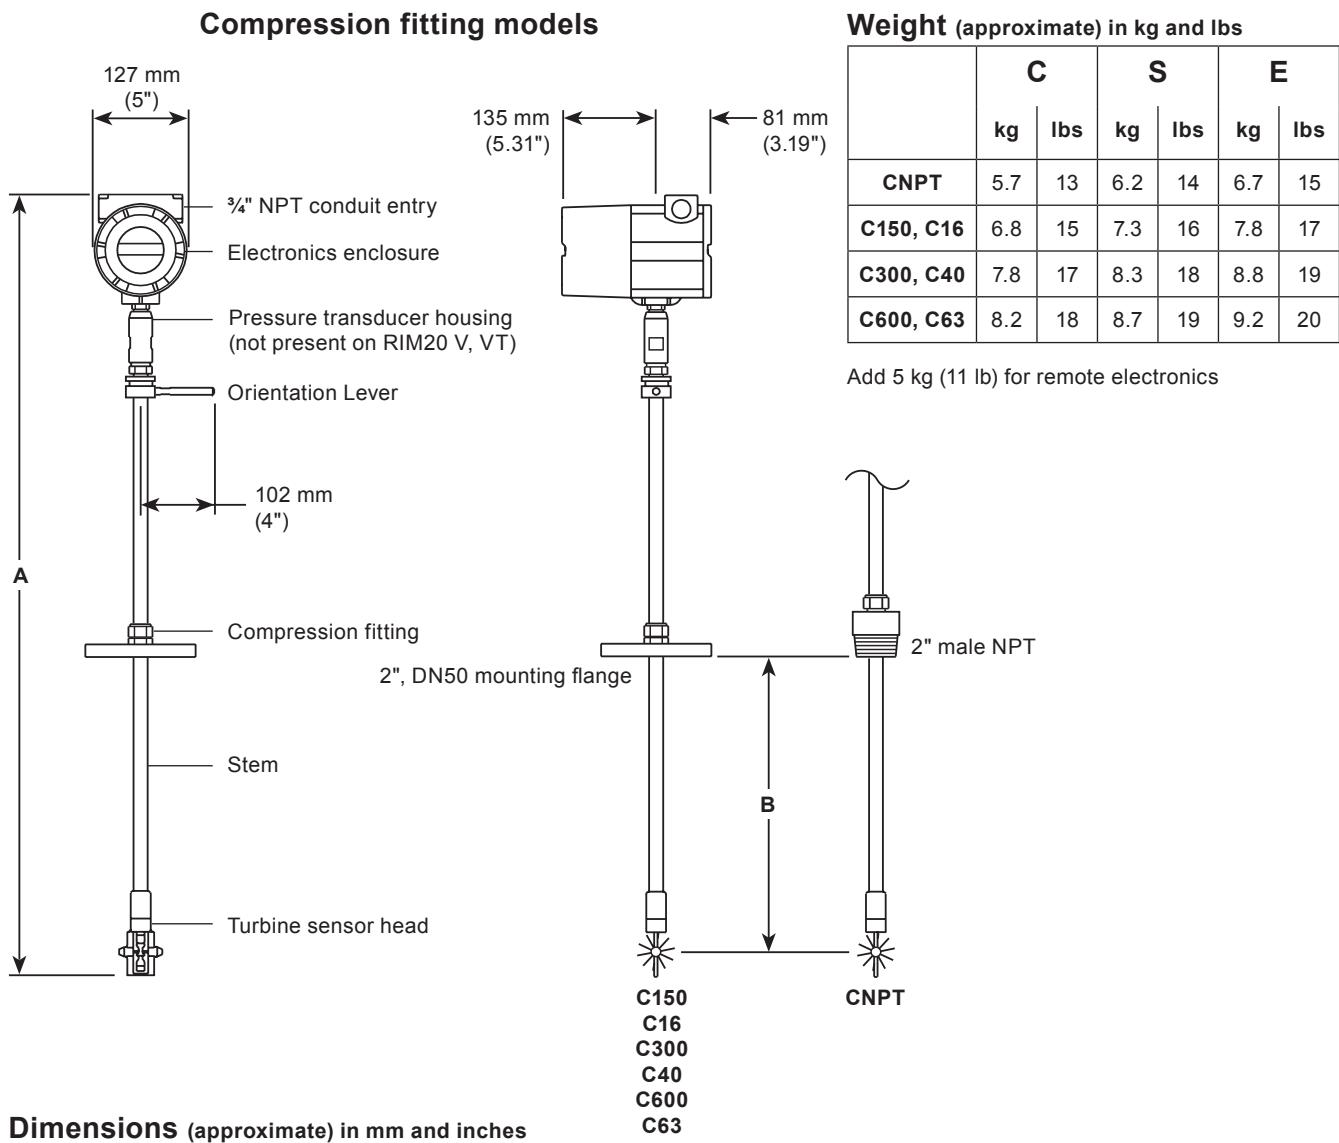


RIM20 VTP

	C Compact Length				S Standard Length				E Extended Length			
	A		B (max)		A		B (max)		A		B (max)	
	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches
Compression fitting, Male NPT	612	24.1	229	9.0	1029	40.5	645	25.4	1334	52.5	950	37.4
Compression fitting, 150 lb, PN16	612	24.1	257	10.1	1029	40.5	673	26.5	1334	52.5	978	38.5
Compression fitting, 300 lb, PN40	612	24.1	254	10.0	1029	40.5	671	26.4	1334	52.5	975	38.4
Compression fitting, 600 lb, PN63	612	24.1	244	9.6	1029	40.5	660	26.0	1334	52.5	965	38.0

Dimensions and weights (approximate) in mm and inches

Packing gland models - Please note that a removable retractor can be used with these models

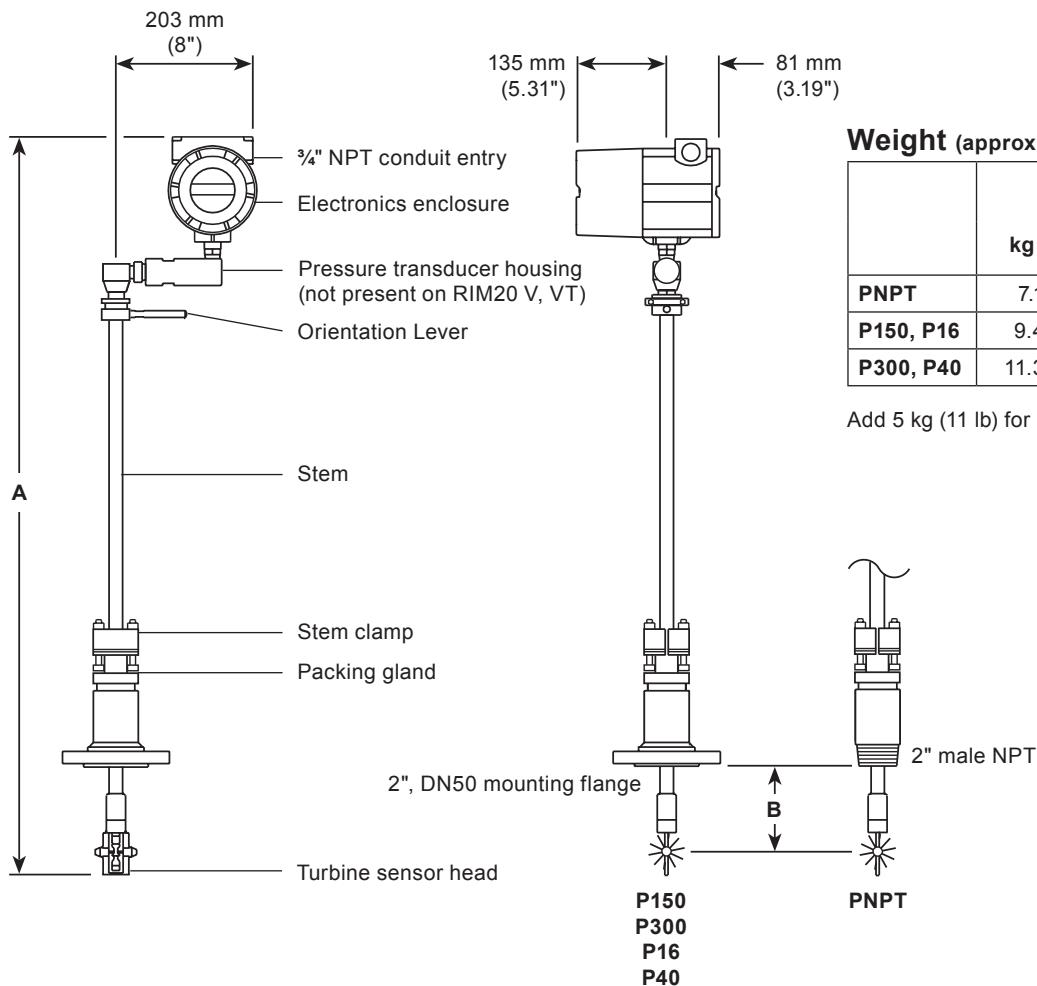

Weight (approximate) in kg and lbs

	S	E		
	kg	lbs	kg	lbs
PNPT	7.1	16	7.6	17
P150, P16	9.4	21	9.9	22
P300, P40	11.3	25	11.8	26


Add 5 kg (11 lb) for remote electronics

Dimensions (approximate) in mm and inches

RIM20 V, VT and VTP	S Standard Length				E Extended Length			
	A	B (max)	A	B (max)	mm	inches	mm	inches
mm	inches	mm	inches	mm	inches	mm	inches	
Packing gland, Male NPT	1 016	40.0	526	20.7	1321	52.0	831	32.7
Packing gland, 150 lb, PN16	1 016	40.0	516	20.3	1321	52.0	820	32.3
Packing gland, 300 lb PN40								

Dimensions and weights (approximate) in mm and inches


Packing gland models with permanent retractor

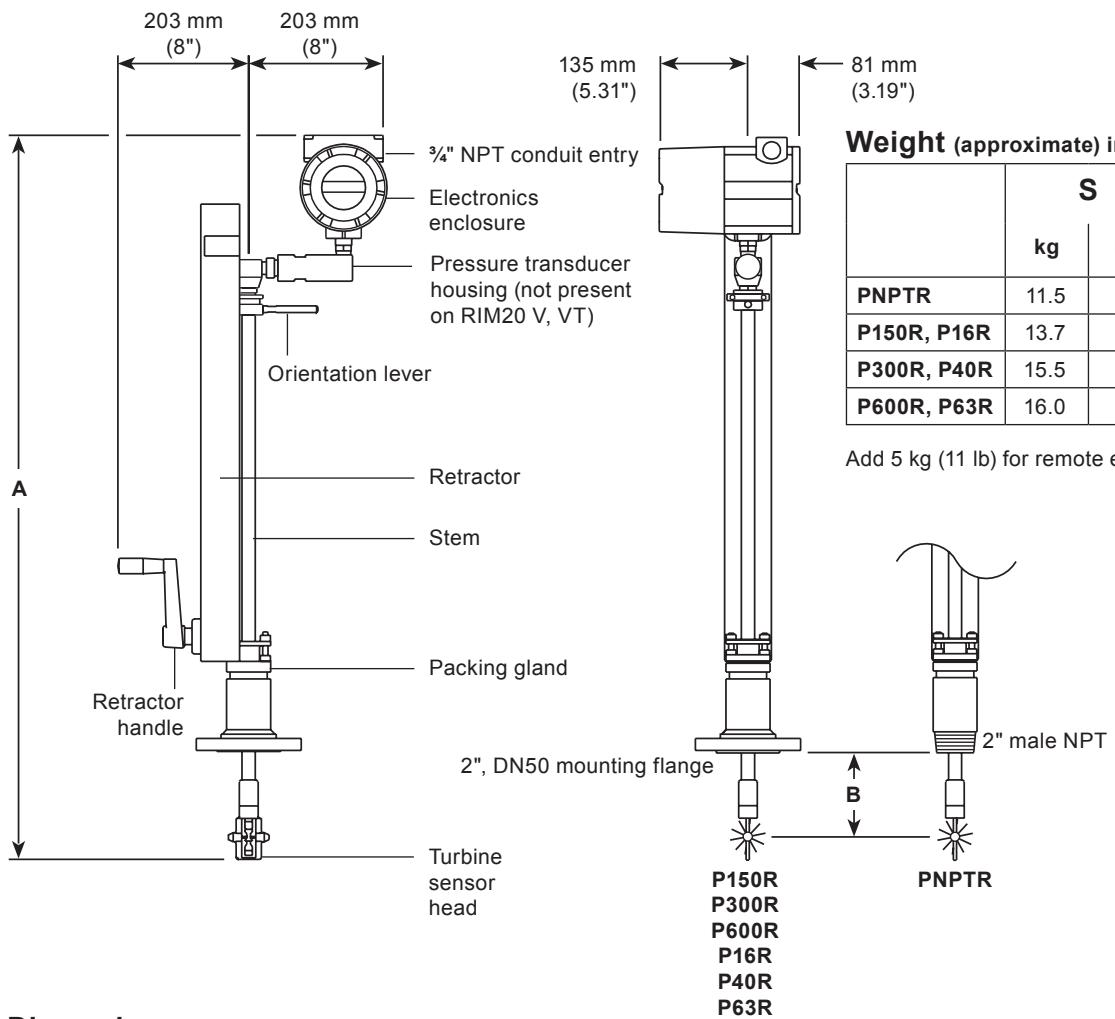

Dimensions (approximate) in mm and inches

RIM20 V, VT and VTP with permanent retractor	S Standard Length				E Extended Length			
	A mm	A inches	B (max) mm	B (max) inches	A mm	A inches	B (max) mm	B (max) inches
Packing gland, Male NPT	1 016	40.0	526	20.7	1321	52.0	831	32.7
Packing gland, 150 lb, PN16								
Packing gland, 300 lb, PN40	1 016	40.0	516	20.3	1321	52.0	820	32.3
Packing gland, 600 lb, PN63								

Remote electronics option

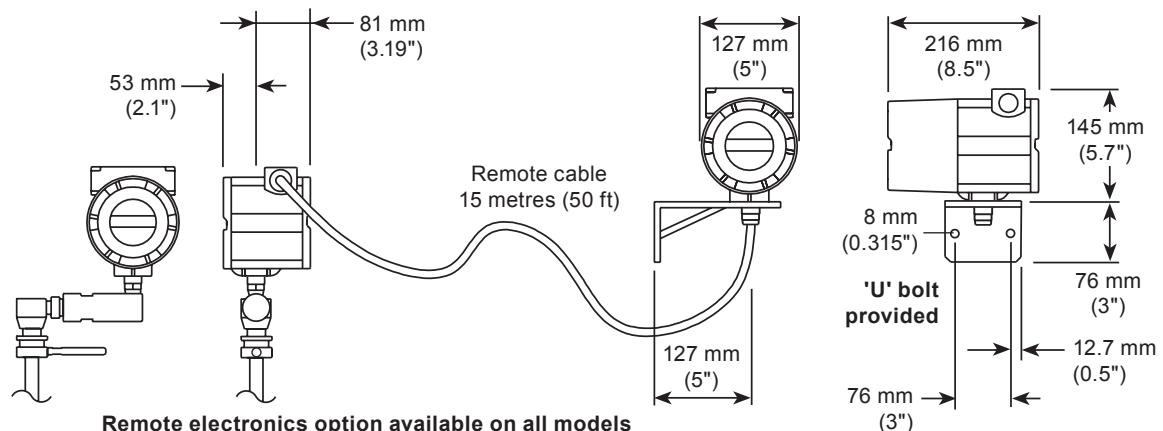

Typical Metric flowrates

Saturated steam (kg/h)

Rotor	Pressure		Nominal pipe size					
			80 mm	150 mm	200 mm	300 mm	400 mm	600 mm
R40	1.4 bar g	Minimum	17	72	127	297	491	1219
		Maximum	225	929	1642	3817	6270	15367
	5 bar g	Minimum	42	173	306	713	1176	2907
		Maximum	537	2216	3915	9090	14 905	36 400
	10 bar g	Minimum	75	310	549	1279	2106	5 194
		Maximum	962	3963	6999	16239	26600	64 815
	1.4 bar g	Minimum	20	82	146	341	563	1396
		Maximum	329	1358	2399	5575	9149	22 384
R30	5 bar g	Minimum	48	198	350	817	1347	3328
		Maximum	785	3237	5716	13265	21735	52 993
	10 bar g	Minimum	86	355	629	1465	2411	5 943
		Maximum	1405	5786	10215	23687	38771	94 337
	1.4 bar g	Minimum	35	146	259	604	995	2 463
		Maximum	530	2187	3863	8968	14 704	35 898
	5 bar g	Minimum	85	350	620	1444	2377	5 856
		Maximum	1265	5207	9194	21322	34 903	84 940
R20	10 bar g	Minimum	152	628	1111	2586	4252	10 448
		Maximum	2261	9303	16419	38049	62227	151 156
	1.4 bar g	Minimum	61	253	448	1045	1721	4 247
		Maximum	1098	4522	7985	18520	30320	73 805
	5 bar g	Minimum	147	606	1072	2496	4 103	10 082
		Maximum	2615	10755	18979	43967	71883	174 497
	10 bar g	Minimum	263	1087	1921	4466	7335	17 975
		Maximum	4672	19197	33862	78386	128050	310 382

Air (nm³/h) at 20 °C

Rotor	Pressure		Nominal pipe size					
			80 mm	150 mm	200 mm	300 mm	400 mm	600 mm
R40	1.4 bar g	Minimum	12	49	87	204	337	838
		Maximum	154	639	1130	2628	4320	10 607
	5 bar g	Minimum	74	305	540	1259	2072	5 107
		Maximum	946	3898	6884	15969	26 152	63 694
	10 bar g	Minimum	137	567	1002	2332	3835	9 423
		Maximum	1751	7205	12718	29476	48216	117 169
	1.4 bar g	Minimum	14	56	100	234	386	960
		Maximum	226	934	1651	3839	6306	15 455
R30	5 bar g	Minimum	84	350	619	1441	2373	5 844
		Maximum	1382	5690	10046	23290	38 115	92 698
	10 bar g	Minimum	157	649	1148	2671	4390	10 779
		Maximum	2556	10511	18548	42965	70237	170 473
	1.4 bar g	Minimum	24	100	178	415	684	1696
		Maximum	365	1505	2660	6179	10 139	24 794
	5 bar g	Minimum	150	618	1094	2544	4 182	10 271
		Maximum	2224	9149	16145	37407	61 166	148 520
R20	10 bar g	Minimum	278	1146	2026	4709	7731	18 929
		Maximum	4110	16888	29789	68956	112643	273 032
	1.4 bar g	Minimum	42	174	308	718	1184	2 927
		Maximum	756	3115	5502	12768	20919	50 995
	5 bar g	Minimum	259	1069	1890	4393	7214	17 668
		Maximum	4595	18874	33290	77048	125842	304 938
	10 bar g	Minimum	480	1980	3499	8125	13323	32 541
		Maximum	8481	34799	61349	141871	231535	560 318

Typical Imperial flowrates

Saturated steam (lb/h)

Rotor	Pressure		3"	6"	Nominal pipe size	8"	12"	16"	24"
R40	5 psi g	Minimum	22	91	162	378	625	1555	
		Maximum	287	1187	2098	4883	8029	19727	
	100 psi g	Minimum	119	496	878	2046	3371	8328	
		Maximum	1540	6350	11216	26034	42668	104092	
	200 psi g	Minimum	220	913	1615	3761	6191	15249	
		Maximum	2827	11643	20558	47681	78064	190027	
	5 psi g	Minimum	25	105	186	434	717	1782	
		Maximum	420	1735	3068	7135	11721	28745	
R30	100 psi g	Minimum	137	568	1006	2344	3861	9530	
		Maximum	2251	9272	16373	37984	62207	151526	
	200 psi g	Minimum	253	1046	1850	4308	7088	17446	
		Maximum	4129	16994	29996	69532	113761	276542	
R20	5 psi g	Minimum	45	186	330	770	1270	3150	
		Maximum	677	2797	4943	11485	18849	46119	
	100 psi g	Minimum	243	1005	1778	4140	6811	16762	
		Maximum	3623	14915	26328	61035	99870	242834	
R10	200 psi g	Minimum	447	1848	3268	7601	12492	30657	
		Maximum	6643	27317	48203	111658	182535	443035	
	5 psi g	Minimum	78	323	572	1334	2199	5440	
		Maximum	1405	5790	10227	23736	38897	94870	
R10	100 psi g	Minimum	421	1739	3075	7153	11755	28849	
		Maximum	7490	30791	54325	125807	205605	498759	
	200 psi g	Minimum	774	3195	5647	13123	21541	52728	
		Maximum	13719	56341	99362	229926	375467	909528	

Air (SCFM) at 70 °F

Rotor	Pressure		3"	6"	Nominal pipe size	8"	12"	16"	24"
R40	5 psi g	Minimum	7	31	55	129	213	529	
		Maximum	98	404	714	1660	2729	6702	
	100 psi g	Minimum	62	255	451	1051	1730	4257	
		Maximum	790	3252	5741	13313	21791	53019	
	200 psi g	Minimum	117	484	857	1992	3273	8031	
		Maximum	1494	6146	10846	25128	41083	99739	
R30	5 psi g	Minimum	9	36	63	148	244	606	
		Maximum	143	590	1043	2426	3984	9765	
	100 psi g	Minimum	71	292	517	1204	1980	4871	
		Maximum	1153	4746	8376	19412	31753	77152	
R20	200 psi g	Minimum	134	555	981	2281	3747	9186	
		Maximum	2181	8964	15814	36617	59832	145094	
	5 psi g	Minimum	15	63	112	262	432	1071	
		Maximum	230	951	1680	3904	6406	15665	
R10	100 psi g	Minimum	125	517	913	2124	3489	8557	
		Maximum	1855	7628	13458	31168	50942	123591	
	200 psi g	Minimum	237	979	1730	4020	6595	16126	
		Maximum	3506	14397	25389	58747	95927	232348	
R10	5 psi g	Minimum	26	110	195	454	748	1849	
		Maximum	478	1968	3476	8067	13217	32219	
	100 psi g	Minimum	216	893	1578	3666	6016	14715	
		Maximum	3831	15728	27734	64166	104762	253698	
	200 psi g	Minimum	410	1691	2987	6933	11362	27714	
		Maximum	7230	29650	52259	120804	197092	476732	

Water flowrates

Size	m³/hr		GPM	
	Minimum	Maximum	Minimum	Maximum
Nominal pipe size	50 mm 2"	1.19	5	314
	80 mm 3"	2.62	12	691
	150 mm 6"	12.30	54	2701
	200 mm 8"	24.80	109	4678
	300 mm 12"	56.00	247	10575
	400 mm 16"	87.60	386	16524
	600 mm 24"	199.00	877	37590

Sizing considerations

Piping conditions	Straight run piping requirements		Upstream	Downstream
	One 90° elbow before the flowmeter		10 D	5 D
	Two 90° elbows before the flowmeter		15 D	5 D
	Two 90° elbows out of plane before the flowmeter		30 D	5 D
	Reduction before the flowmeter		10 D	5 D
	Expansion before the flowmeter		20 D	5 D
	Partially open valve		30 D	5 D
<p>D = Internal diameter of the pipe - If there is not a sufficient straight run of pipe, a flow rectifier may be used to reduce the above diameter measurements.</p> <p>Consult your local Spirax Sarco representative or the factory for your specific application.</p>				
Velocity range	Liquid	Maximum 9 metres/second (30 feet/second)		
		Minimum 0.15 metres/second (0.5 feet/second)		
	Gas or steam	Maximum 13 to 62 metres/second (43 to 205 feet/second) depending on rotor pitch		
		Minimum 1 to 3.7 metres/second (3.5 to 12 feet/second) depending on rotor pitch		

Other installation considerations:

- Mounting position**
The RIM20 may be installed in vertical, horizontal, or angled pipe sections. The flowmeter is attached perpendicular to the axis of the pipe and should not be mounted 'upside-down' (with its top section hanging below the pipe mount). For liquid service, the fluid must completely fill the pipe.
- Site selection**
The flow measurement location should be selected to minimize turbulence and swirl. The extent of these flow disturbances depends upon the piping configuration. Valves, elbows, pumps, and other piping components may add disturbances to the flow.
- Hot-tap compatibility**
With the removable or permanent retractor assembly the RIM20 is 'hot-tappable' and can be installed and removed without shutting down the process. An isolation valve with a pipe mounting kit is used to isolate the flowmeter from the process.

Accessories

Removable retractor

For models without a permanent retractor, one removable retractor must be used if the process pressure is >3.4 bar g (50 psi g).

Removable retractor options	Removable retractor
	Extended length removable retractor – For use with extended length probes

How to order example: 1 off Spirax Sarco RIM20 - Removable retractor.

Replacement rotors

Rotor spares	Rotor assembly, liquid, 40° pitch	L40
	Rotor assembly, steam/gas, 10° pitch	R10
	Rotor assembly, steam/gas, 15° pitch	R15
	Rotor assembly, steam/gas, 20° pitch	R20
	Rotor assembly, steam/gas, 25° pitch	R25
	Rotor assembly, steam/gas, 30° pitch	R30
	Rotor assembly, steam/gas, 40° pitch	R40

How to order example: 1 off Spirax Sarco RIM20 - L40 – Rotor Assembly.

How to order

Selection:

Category	Description	Suffix code	Grey = Standard		
Flowmeter	Insertion multivariable mass turbine flowmeter	RIM20	RIM20		
	Volumetric flowmeter for liquid, gas and steam	V			
	Velocity and temperature sensors	VT			
	Velocity, temperature and pressure sensors	VTP			
	Velocity, temperature and external 4-20 mA pressure input	VTEP			
Electronics	Velocity, external RTD temperature input, external 4-20 mA pressure input	VETEP	V		
	Energy output options	VTEM			
	Energy options with pressure sensor	VTPEM			
	Energy options, velocity, temperature and external 4-20 mA pressure input	VTEPEM			
	Energy options, velocity, external RTD temperature input, external 4-20 mA pressure input	VETEPEM			
Probe length	Standard length	S			
	Compact length - Only available for compression fitting connections CNPT, C150, C300, C600, C16, C40 and C63	C	S		
	Extended length	E			
	Local mount NEMA 4X, IP66 Enclosure	L			
	Remote electronics NEMA 4X, IP66 25' cable with display - (not suitable for ATEX / IECEx)	R25			
Electronics enclosure mounting	25' (7.6 m) armored cable with glands 'V' flowmeter only	A25	L		
	25' (7.6 m) armored cable with glands 'VT', 'VTP' flowmeter only	A25P			
	Remote electronics NEMA 4X, IP66 50' cable with display - (not suitable for ATEX / IECEx)	R50			
	50' (15.2 m) armored cable with glands 'V' flowmeter only	A50			
	50' (15.2 m) armored cable with glands 'VT', 'VTP' flowmeter only	A50P			
Display	Digital display and programming buttons	D	D		
	12-36 Vdc, 25 mA, 1 W maximum required on loop powered flowmeters, 1HL only	DL			
Power supply	12-36 Vdc, 300 mA, 9 W maximum - use with 1H, 1M, 1B, 3H, 3M, 3B	DH			
	100-240 Vac, 50/60 Hz line power, 5 W maximum - use with 1H, 1M, 1B, 3H, 3M, 3B	AC			
Output signal	Loop powered option - one analogue output (4-20 mA), one alarm, one pulse, HART® DL input power only	1HL			
Inclusive of the scaled frequency output	One analogue output (4-20 mA), one alarm, one pulse, HART® communication protocol, DH or AC option only	1H			
	One analogue output (4-20 mA), one alarm, one pulse, MODBUS communication protocol, DH or AC option only	1M			
	One analogue output (4-20 mA), one alarm, one pulse, BACnet communication protocol, DH or AC option only	1B			
	Three analogue outputs (4-20 mA), three alarms, one pulse, HART® ('VT', 'VTP' only), DH or AC option only	3H			
	Three analogue outputs (4-20 mA), three alarms, one pulse, MODBUS ('VT', 'VTP' only), DH or AC option only	3M			
	Three analogue outputs (4-20 mA), three alarms, one pulse, BACnet ('VT', 'VTP' only), DH or AC option only	3B			
Process temperature	Standard temperature Process temperature -55 °C to 232 °C -67 °F to 450 °F	S			
	High temperature Process temperature -267 °C to 454 °C -448 °F to 850 °F	H			
	No pressure sensor	P0			
	Maximum 2 bar a 30 psi a Proof 4 bar a 60 psi a	P1			
Pressure sensor	Maximum 7 bar a 100 psi a Proof 14 bar a 200 psi a	P2			
	Maximum 20 bar a 300 psi a Proof 41 bar a 600 psi a	P3			
	Maximum 34 bar a 500 psi a Proof 69 bar a 1000 psi a	P4			
	Maximum 100 bar a 1500 psi a Proof 175 bar a 2500 psi a	P5			
Process connections	Compression, 2" NPT	CNPT	Packing gland, 2" NPT, retractor (use with E probe)	PNPTR-E	
	Compression, 2" ASME 150 flange	C150	Packing gland, 2" ASME 150 flange, retractor	P150R	
	Compression, DN50 PN16 flange	C16	Packing gland, 2" ASME 150 flange, retractor (E probe)	P150R-E	
	Compression, 2" ASME 300 flange	C300	Packing gland, DN50 PN16 flange, retractor	P16R	
	Compression, DN50 PN40 flange	C40	Packing gland, DN50 PN16 flange, retractor (E probe)	P16R-E	
	Compression, 2" ASME 600 flange	C600	Packing gland, 2" ASME 300 flange, retractor	P300R	
	Compression, DN50 PN63 flange	C63	Packing gland, 2" ASME 300 flange, retractor (E probe)	P300R-E	
	Packing gland*, 2" NPT	PNPT	Packing gland, DN50 PN40 flange, retractor	P40R	
	Packing gland*, 2" ASME 150 flange	P150	Packing gland, DN50 PN40 flange, retractor (E probe)	P40R-E	
	Packing gland*, DN50 PN16 flange	P16	Packing gland, 2" ASME 600 flange, retractor	P600R	
	Packing gland*, 2" ASME 300 flange	P300	Packing gland, 2" ASME 600 flange, retractor (E probe)	P600R-E	
	Packing gland*, DN50 PN40 flange	P40	Packing gland, DN50 PN63 flange, retractor	P63R	
	Packing gland, 2" NPT, retractor	PNPTR	Packing gland, DN50 PN63 flange, retractor (E probe)	P63R-E	
	* One removable retractor must be ordered if the process pressure is >3.4 bar g (50 psi g).				
Conformity	CE marked only		S	S	
	Gas or Steam Vmin = 1.07 m/s (3.5 ft/sec) Vmax = 13.1 m/s (43 ft/sec) 40° pitch		R40		
	Gas or Steam Vmin = 1.2 m/s (4.0 ft/sec) Vmax = 19.0 m/s (62.5 ft/sec) 30° pitch		R30		
	Gas or Steam Vmin = 1.5 m/s (5.0 ft/sec) Vmax = 24.4 m/s (80 ft/sec) 25° pitch		R25		
Rotor options	Gas or Steam Vmin = 2.1 m/s (7.0 ft/sec) Vmax = 30.5 m/s (100 ft/sec) 20° pitch		R20		
	Gas or Steam Vmin = 2.6 m/s (8.5 ft/sec) Vmax = 41.0 m/s (134.6 ft/sec) 15° pitch		R15		
	Gas or Steam Vmin = 3.7 m/s (12.0 ft/sec) Vmax = 62.5 m/s (205 ft/sec) 10° pitch		R10		
	Liquid Vmin = 0.3 m/s (1.0 ft/sec) Vmax = 9.1 m/s (30 ft/sec) 40° pitch		L40		

Selection example: **RIM20** - **V** - **S** - **L** - **D** - **DL** - **1HL** - **S** - **P0** - **PNPTR** - **S** - **R40**

How to order example: 1 off Spirax Sarco RIM20 - V - S - L - D - DL - 1HL - S - P0 - PNPTR - S - R40 rotor insertion flowmeter.